



The Neo4j REST API documentation v3.0

Table of Contents

Service root	2
Legacy Cypher HTTP endpoint	3
Property values	18
Nodes	19
Relationships	25
Relationship types	36
Node properties	37
Relationship properties	42
Node labels	48
Node degree	55
Indexing	57
Constraints	59
Traversals	63
Graph Algorithms	89
Batch operations	96
Legacy indexing	104
Unique Indexing	111
WADL Support	122
Using the REST API from WebLogic	123
License	123

Detailed documentation of the Neo4j Server REST API.

The Neo4j REST API is designed with discoverability in mind, so that you can start with a GET on the [Service root](#) and from there discover URIs to perform other requests. The examples below uses URIs in the examples; they are subject to change in the future, so for future-proofness *discover URIs where possible*, instead of relying on the current layout. The default representation is [json](#) (<http://www.json.org/>), both for responses and for data sent with POST/PUT requests.

Below follows a listing of ways to interact with the REST API. For language bindings to the REST API, see [\[languages\]](#).

To interact with the JSON interface you must explicitly set the request header `Accept:application/json` for those requests that responds with data. You should also set the header `Content-Type:application/json` if your request sends data, for example when you're creating a relationship. The examples include the relevant request and response headers.

The server supports streaming results, with better performance and lower memory overhead. See [\[rest-api-streaming\]](#) for more information.

Service root

Get service root

The service root is your starting point to discover the REST API. It contains the basic starting points for the database, and some version and extension information.

Figure 1. Final Graph

Example request

- **GET** `http://localhost:7474/db/data/`
- **Accept:** `application/json; charset=UTF-8`

Example response

- **200:** OK
- **Content-Type:** `application/json; charset=UTF-8`

```
{
  "extensions" : { },
  "node" : "http://localhost:7474/db/data/node",
  "relationship" : "http://localhost:7474/db/data/relationship",
  "node_index" : "http://localhost:7474/db/data/index/node",
  "relationship_index" : "http://localhost:7474/db/data/index/relationship",
  "extensions_info" : "http://localhost:7474/db/data/ext",
  "relationship_types" : "http://localhost:7474/db/data/relationship/types",
  "batch" : "http://localhost:7474/db/data/batch",
  "cypher" : "http://localhost:7474/db/data/cypher",
  "indexes" : "http://localhost:7474/db/data/schema/index",
  "constraints" : "http://localhost:7474/db/data/schema/constraint",
  "transaction" : "http://localhost:7474/db/data/transaction",
  "node_labels" : "http://localhost:7474/db/data/labels",
  "neo4j_version" : "3.0.1"
}
```

Legacy Cypher HTTP endpoint



This endpoint is deprecated. Please transition to using the new transactional endpoint (see [\[rest-api-transactional\]](#)). Among other things it allows you to run multiple Cypher statements in the same transaction.

The Neo4j REST API allows querying with Cypher, see [\[cypher-query-lang\]](#). The results are returned as a list of string headers (columns), and a data part, consisting of a list of all rows, every row consisting of a list of REST representations of the field value — Node, Relationship, Path or any simple value like String.



In order to speed up queries in repeated scenarios, try not to use literals but replace them with parameters wherever possible in order to let the server cache query plans, see [Use parameters](#) for details. Also see [\[cypher-parameters\]](#) for where parameters can be used.

Use parameters

Cypher supports queries with parameters which are submitted as JSON.

```
MATCH (x { name: { startName } })-[r]-(friend)
WHERE friend.name = { name }
RETURN TYPE(r)
```




Figure 2. Final Graph

Example request

- **POST** `http://localhost:7474/db/data/cypher`
- **Accept:** `application/json; charset=UTF-8`
- **Content-Type:** `application/json`

```
{
  "query" : "MATCH (x {name: {startName}})-[r]-(friend) WHERE friend.name = {name} RETURN TYPE(r)",
  "params" : {
    "startName" : "I",
    "name" : "you"
  }
}
```

Example response

- **200:** OK
- **Content-Type:** `application/json; charset=UTF-8`

```
{
  "columns" : [ "TYPE(r)" ],
  "data" : [ [ "know" ] ]
}
```

Create a node

Create a node with a label and a property using Cypher. See the request for the parameter sent with the query.

```
CREATE (n:Person { name : { name }})
RETURN n
```




Figure 3. Final Graph

Example request

- **POST** `http://localhost:7474/db/data/cypher`
- **Accept:** `application/json; charset=UTF-8`
- **Content-Type:** `application/json`

```
{
  "query" : "CREATE (n:Person { name : {name} }) RETURN n",
  "params" : {
    "name" : "Andres"
  }
}
```

Example response

- **200:** OK
- **Content-Type:** `application/json; charset=UTF-8`

```

{
  "columns" : [ "n" ],
  "data" : [ [ {
    "metadata" : {
      "id" : 176,
      "labels" : [ "Person" ]
    },
    "data" : {
      "name" : "Andres"
    },
    "paged_traverse" :
"http://localhost:7474/db/data/node/176/paged/traverse/{returnType}?pageSize,leaseTime",
    "outgoing_relationships" : "http://localhost:7474/db/data/node/176/relationships/out",
    "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/176/relationships/out/{-
list|&|types}",
    "create_relationship" : "http://localhost:7474/db/data/node/176/relationships",
    "labels" : "http://localhost:7474/db/data/node/176/labels",
    "traverse" : "http://localhost:7474/db/data/node/176/traverse/{returnType}",
    "extensions" : { },
    "all_relationships" : "http://localhost:7474/db/data/node/176/relationships/all",
    "all_typed_relationships" : "http://localhost:7474/db/data/node/176/relationships/all/{-
list|&|types}",
    "property" : "http://localhost:7474/db/data/node/176/properties/{key}",
    "self" : "http://localhost:7474/db/data/node/176",
    "incoming_relationships" : "http://localhost:7474/db/data/node/176/relationships/in",
    "properties" : "http://localhost:7474/db/data/node/176/properties",
    "incoming_typed_relationships" : "http://localhost:7474/db/data/node/176/relationships/in/{-
list|&|types}"
  } ] ]
}

```

Create a node with multiple properties

Create a node with a label and multiple properties using Cypher. See the request for the parameter sent with the query.

```

CREATE (n:Person { props })
RETURN n

```




Figure 4. Final Graph

Example request

- **POST** http://localhost:7474/db/data/cypher
- **Accept:** application/json; charset=UTF-8
- **Content-Type:** application/json

```

{
  "query" : "CREATE (n:Person { props }) RETURN n",
  "params" : {
    "props" : {
      "position" : "Developer",
      "name" : "Michael",
      "awesome" : true,
      "children" : 3
    }
  }
}

```

Example response

- 200: OK
- Content-Type: application/json; charset=UTF-8

```
{
  "columns" : [ "n" ],
  "data" : [ [ {
    "metadata" : {
      "id" : 173,
      "labels" : [ "Person" ]
    },
    "data" : {
      "awesome" : true,
      "children" : 3,
      "name" : "Michael",
      "position" : "Developer"
    },
    "paged_traverse" :
      "http://localhost:7474/db/data/node/173/paged/traverse/{returnType}{?pageSize,leaseTime}",
      "outgoing_relationships" : "http://localhost:7474/db/data/node/173/relationships/out",
      "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/173/relationships/out/{-list|&|types}",
      "create_relationship" : "http://localhost:7474/db/data/node/173/relationships",
      "labels" : "http://localhost:7474/db/data/node/173/labels",
      "traverse" : "http://localhost:7474/db/data/node/173/traverse/{returnType}",
      "extensions" : { },
      "all_relationships" : "http://localhost:7474/db/data/node/173/relationships/all",
      "all_typed_relationships" : "http://localhost:7474/db/data/node/173/relationships/all/{-list|&|types}",
      "property" : "http://localhost:7474/db/data/node/173/properties/{key}",
      "self" : "http://localhost:7474/db/data/node/173",
      "incoming_relationships" : "http://localhost:7474/db/data/node/173/relationships/in",
      "properties" : "http://localhost:7474/db/data/node/173/properties",
      "incoming_typed_relationships" : "http://localhost:7474/db/data/node/173/relationships/in/{-list|&|types}"
    } ] ] ]
}
```

Create multiple nodes with properties

Create multiple nodes with properties using Cypher. See the request for the parameter sent with the query.

```
UNWIND { props } AS properties
CREATE (n:Person)
SET n = properties
RETURN n
```




Figure 5. Final Graph

Example request

- POST http://localhost:7474/db/data/cypher
- Accept: application/json; charset=UTF-8
- Content-Type: application/json


```
{
  "query" : "UNWIND {props} AS properties CREATE (n:Person) SET n = properties RETURN n",
  "params" : {
    "props" : [ {
      "name" : "Andres",
      "position" : "Developer"
    }, {
      "name" : "Michael",
      "position" : "Developer"
    } ]
  }
}
```

Example response

- **200:** OK
- **Content-Type:** application/json; charset=UTF-8

```

{
  "columns" : [ "n" ],
  "data" : [ [ {
    "metadata" : {
      "id" : 177,
      "labels" : [ "Person" ]
    },
    "data" : {
      "name" : "Andres",
      "position" : "Developer"
    },
    "paged_traverse" :
"http://localhost:7474/db/data/node/177/paged/traverse/{returnType}{?pageSize,leaseTime}",
    "outgoing_relationships" : "http://localhost:7474/db/data/node/177/relationships/out",
    "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/177/relationships/out/{-
list|&|types}",
    "create_relationship" : "http://localhost:7474/db/data/node/177/relationships",
    "labels" : "http://localhost:7474/db/data/node/177/labels",
    "traverse" : "http://localhost:7474/db/data/node/177/traverse/{returnType}",
    "extensions" : { },
    "all_relationships" : "http://localhost:7474/db/data/node/177/relationships/all",
    "all_typed_relationships" : "http://localhost:7474/db/data/node/177/relationships/all/{-
list|&|types}",
    "property" : "http://localhost:7474/db/data/node/177/properties/{key}",
    "self" : "http://localhost:7474/db/data/node/177",
    "incoming_relationships" : "http://localhost:7474/db/data/node/177/relationships/in",
    "properties" : "http://localhost:7474/db/data/node/177/properties",
    "incoming_typed_relationships" : "http://localhost:7474/db/data/node/177/relationships/in/{-
list|&|types}"
  } ], [ {
    "metadata" : {
      "id" : 178,
      "labels" : [ "Person" ]
    },
    "data" : {
      "name" : "Michael",
      "position" : "Developer"
    },
    "paged_traverse" :
"http://localhost:7474/db/data/node/178/paged/traverse/{returnType}{?pageSize,leaseTime}",
    "outgoing_relationships" : "http://localhost:7474/db/data/node/178/relationships/out",
    "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/178/relationships/out/{-
list|&|types}",
    "create_relationship" : "http://localhost:7474/db/data/node/178/relationships",
    "labels" : "http://localhost:7474/db/data/node/178/labels",
    "traverse" : "http://localhost:7474/db/data/node/178/traverse/{returnType}",
    "extensions" : { },
    "all_relationships" : "http://localhost:7474/db/data/node/178/relationships/all",
    "all_typed_relationships" : "http://localhost:7474/db/data/node/178/relationships/all/{-
list|&|types}",
    "property" : "http://localhost:7474/db/data/node/178/properties/{key}",
    "self" : "http://localhost:7474/db/data/node/178",
    "incoming_relationships" : "http://localhost:7474/db/data/node/178/relationships/in",
    "properties" : "http://localhost:7474/db/data/node/178/properties",
    "incoming_typed_relationships" : "http://localhost:7474/db/data/node/178/relationships/in/{-
list|&|types}"
  } ] ]
}

```

Set all properties on a node using Cypher

Set all properties on a node.

```

CREATE (n:Person { name: 'this property is to be deleted' })
SET n = { props }
RETURN n

```




Figure 6. Final Graph

Example request

- **POST** http://localhost:7474/db/data/cypher
- **Accept:** application/json; charset=UTF-8
- **Content-Type:** application/json

```

{
  "query" : "CREATE (n:Person { name: 'this property is to be deleted' }) SET n = { props } RETURN n",
  "params" : {
    "props" : {
      "position" : "Developer",
      "firstName" : "Michael",
      "awesome" : true,
      "children" : 3
    }
  }
}

```

Example response

- **200:** OK
- **Content-Type:** application/json; charset=UTF-8

```

{
  "columns" : [ "n" ],
  "data" : [ [ {
    "metadata" : {
      "id" : 204,
      "labels" : [ "Person" ]
    },
    "data" : {
      "awesome" : true,
      "firstName" : "Michael",
      "children" : 3,
      "position" : "Developer"
    },
    "paged_traverse" :
      "http://localhost:7474/db/data/node/204/paged/traverse/{returnType}?pageSize,leaseTime",
      "outgoing_relationships" : "http://localhost:7474/db/data/node/204/relationships/out",
      "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/204/relationships/out/{-list|&|types}",
      "create_relationship" : "http://localhost:7474/db/data/node/204/relationships",
      "labels" : "http://localhost:7474/db/data/node/204/labels",
      "traverse" : "http://localhost:7474/db/data/node/204/traverse/{returnType}",
      "extensions" : { },
      "all_relationships" : "http://localhost:7474/db/data/node/204/relationships/all",
      "all_typed_relationships" : "http://localhost:7474/db/data/node/204/relationships/all/{-list|&|types}",
      "property" : "http://localhost:7474/db/data/node/204/properties/{key}",
      "self" : "http://localhost:7474/db/data/node/204",
      "incoming_relationships" : "http://localhost:7474/db/data/node/204/relationships/in",
      "properties" : "http://localhost:7474/db/data/node/204/properties",
      "incoming_typed_relationships" : "http://localhost:7474/db/data/node/204/relationships/in/{-list|&|types}"
    } ] ]
}

```

Send a query

A simple query returning all nodes connected to some node, returning the node and the name property, if it exists, otherwise **NULL**:

```
MATCH (x { name: 'I' })-[r]->(n)
RETURN type(r), n.name, n.age
```




Figure 7. Final Graph

Example request

- **POST** http://localhost:7474/db/data/cypher
- **Accept:** application/json; charset=UTF-8
- **Content-Type:** application/json

```
{
  "query" : "MATCH (x {name: 'I'})-[r]->(n) RETURN type(r), n.name, n.age",
  "params" : { }
}
```

Example response

- **200:** OK
- **Content-Type:** application/json; charset=UTF-8

```
{
  "columns" : [ "type(r)", "n.name", "n.age" ],
  "data" : [ [ "know", "him", 25 ], [ "know", "you", null ] ]
}
```

Return paths

Paths can be returned just like other return types.

```
MATCH path =(x { name: 'I' })--(friend)
RETURN path, friend.name
```




Figure 8. Final Graph

Example request

- **POST** http://localhost:7474/db/data/cypher
- **Accept:** application/json; charset=UTF-8
- **Content-Type:** application/json

```
{
  "query" : "MATCH path = (x {name: 'I'})--(friend) RETURN path, friend.name",
  "params" : { }
}
```

Example response

- **200:** OK
- **Content-Type:** application/json; charset=UTF-8

```
{
  "columns" : [ "path", "friend.name" ],
  "data" : [ [ {
    "relationships" : [ "http://localhost:7474/db/data/relationship/83" ],
    "nodes" : [ "http://localhost:7474/db/data/node/202", "http://localhost:7474/db/data/node/203" ],
    "directions" : [ "->" ],
    "start" : "http://localhost:7474/db/data/node/202",
    "length" : 1,
    "end" : "http://localhost:7474/db/data/node/203"
  }, "you" ] ]
}
```

Nested results

When sending queries that return nested results like list and maps, these will get serialized into nested JSON representations according to their types.

```
MATCH (n)
WHERE n.name IN ['I', 'you']
RETURN collect(n.name)
```




Figure 9. Final Graph

Example request

- **POST** http://localhost:7474/db/data/cypher
- **Accept:** application/json; charset=UTF-8
- **Content-Type:** application/json

```
{
  "query" : "MATCH (n) WHERE n.name in ['I', 'you'] RETURN collect(n.name)",
  "params" : { }
}
```

Example response

- **200:** OK
- **Content-Type:** application/json; charset=UTF-8

```
{
  "columns" : [ "collect(n.name)" ],
  "data" : [ [ [ "I", "you" ] ] ]
}
```

Retrieve query metadata

By passing in an additional GET parameter when you execute Cypher queries, metadata about the query will be returned, such as how many labels were added or removed by the query.

```
MATCH (n { name: 'I' })
SET n:Actor
REMOVE n:Director
RETURN labels(n)
```




Figure 10. Final Graph

Example request

- **POST** http://localhost:7474/db/data/cypher?includeStats=true
- **Accept:** application/json; charset=UTF-8
- **Content-Type:** application/json

```
{
  "query" : "MATCH (n {name: 'I'}) SET n:Actor REMOVE n:Director RETURN labels(n)",
  "params" : { }
}
```

Example response

- **200:** OK
- **Content-Type:** application/json; charset=UTF-8

```
{
  "columns" : [ "labels(n)" ],
  "data" : [ [ [ "Actor" ] ] ],
  "stats" : {
    "nodes_deleted" : 0,
    "relationship_deleted" : 0,
    "nodes_created" : 0,
    "labels_added" : 1,
    "relationships_created" : 0,
    "indexes_added" : 0,
    "properties_set" : 0,
    "contains_updates" : true,
    "indexes_removed" : 0,
    "constraints_added" : 0,
    "labels_removed" : 1,
    "constraints_removed" : 0
  }
}
```

Errors

Errors on the server will be reported as a JSON-formatted message, exception name and stacktrace.

```
MATCH (x { name: 'I' })  
RETURN x.dummy/0
```




Figure 11. Final Graph

Example request

- **POST** `http://localhost:7474/db/data/cypher`
- **Accept:** `application/json; charset=UTF-8`
- **Content-Type:** `application/json`

```
{  
  "query" : "MATCH (x {name: 'I'}) RETURN x.dummy/0",  
  "params" : { }  
}
```

Example response

- **400:** Bad Request
- **Content-Type:** `application/json; charset=UTF-8`

```
{  
  "message": "/ by zero",  
  "exception": "BadInputException",  
  "fullname": "org.neo4j.server.rest.repr.BadInputException",  
  "stackTrace": [  
  
    "org.neo4j.server.rest.repr.RepresentationExceptionHandlingIterable.exceptionOnNext(RepresentationExceptionHandlingIterable.java:39)",  
    "org.neo4j.helpers.collection.ExceptionHandlingIterable$1.next(ExceptionHandlingIterable.java:55)",  
    "org.neo4j.helpers.collection.IteratorWrapper.next(IteratorWrapper.java:47)",  
    "org.neo4j.server.rest.repr.ListRepresentation.serialize(ListRepresentation.java:64)",  
    "org.neo4j.server.rest.repr.Serializer.serialize(Serializer.java:75)",  
    "org.neo4j.server.rest.repr.MappingSerializer.putList(MappingSerializer.java:61)",  
    "org.neo4j.server.rest.repr.CypherResultRepresentation.serialize(CypherResultRepresentation.java:58)",  
    "org.neo4j.server.rest.repr.MappingRepresentation.serialize(MappingRepresentation.java:41)",  
    "org.neo4j.server.rest.repr.OutputFormat.assemble(OutputFormat.java:235)",  
    "org.neo4j.server.rest.repr.OutputFormat.formatRepresentation(OutputFormat.java:175)",  
    "org.neo4j.server.rest.repr.OutputFormat.response(OutputFormat.java:158)",  
    "org.neo4j.server.rest.repr.OutputFormat.ok(OutputFormat.java:71)",  
    "org.neo4j.server.web.CypherService.cypher(CypherService.java:138)",  
    "java.lang.reflect.Method.invoke(Method.java:497)",  
  
    "org.neo4j.server.rest.transactional.TransactionalRequestDispatcher.dispatch(TransactionalRequestDispatcher.java:144)",  
    "org.neo4j.server.web.CollectUserAgentFilter.doFilter(CollectUserAgentFilter.java:69)",  
    "java.lang.Thread.run(Thread.java:745)"  
  ],  
  "cause": {  
    "exception": "QueryExecutionException",  
    "cause": {  
      "exception": "QueryExecutionKernelException",
```

```

"cause": {
  "exception": "ArithmeticException",
  "cause": {
    "exception": "ArithmeticException",
    "fullname": "org.neo4j.cypher.internal.frontend.v3_0.ArithmeticException",
    "stackTrace": [
      "org.neo4j.cypher.internal.compiler.v3_0.commands.expressions.Divide.apply(Divide.scala:36)",
      "org.neo4j.cypher.internal.compiler.v3_0.pipes.ProjectionPipe$$anonfun$internalCreateResults$1$$anonfun$apply$1.apply(ProjectionPipe.scala:48)",
      "org.neo4j.cypher.internal.compiler.v3_0.pipes.ProjectionPipe$$anonfun$internalCreateResults$1$$anonfun$apply$1.apply(ProjectionPipe.scala:46)",
        "scala.collection.immutable.Map$Map1.foreach(Map.scala:116)",
      "org.neo4j.cypher.internal.compiler.v3_0.pipes.ProjectionPipe$$anonfun$internalCreateResults$1.apply(ProjectionPipe.scala:46)",
      "org.neo4j.cypher.internal.compiler.v3_0.pipes.ProjectionPipe$$anonfun$internalCreateResults$1.apply(ProjectionPipe.scala:45)",
        "scala.collection.Iterator$$anon$11.next(Iterator.scala:409)",
        "scala.collection.Iterator$$anon$11.next(Iterator.scala:409)",
      "org.neo4j.cypher.internal.compiler.v3_0.ClosingIterator$$anonfun$next$1.apply(ResultIterator.scala:73)",
      "org.neo4j.cypher.internal.compiler.v3_0.ClosingIterator$$anonfun$next$1.apply(ResultIterator.scala:70)",
      "org.neo4j.cypher.internal.compiler.v3_0.ClosingIterator$$anonfun$failIfThrows$1.apply(ResultIterator.scala:93)",
      "org.neo4j.cypher.internal.compiler.v3_0.ClosingIterator.decoratedCypherException(ResultIterator.scala:102)",
      "org.neo4j.cypher.internal.compiler.v3_0.ClosingIterator.failIfThrows(ResultIterator.scala:91)",
        "org.neo4j.cypher.internal.compiler.v3_0.ClosingIterator.next(ResultIterator.scala:70)",
        "org.neo4j.cypher.internal.compiler.v3_0.ClosingIterator.next(ResultIterator.scala:48)",
      "org.neo4j.cypher.internal.compiler.v3_0.PipeExecutionResult.next(PipeExecutionResult.scala:75)",
      "org.neo4j.cypher.internal.compiler.v3_0.PipeExecutionResult$$anon$2.next(PipeExecutionResult.scala:68)",
      "org.neo4j.cypher.internal.compiler.v3_0.PipeExecutionResult$$anon$2.next(PipeExecutionResult.scala:66)",
      "org.neo4j.cypher.internal.compatibility.ExecutionResultWrapperFor3_0$$anon$1$$anonfun$next$1.apply(CompatibilityFor3_0.scala:242)",
      "org.neo4j.cypher.internal.compatibility.ExecutionResultWrapperFor3_0$$anon$1$$anonfun$next$1.apply(CompatibilityFor3_0.scala:242)",
      "org.neo4j.cypher.internal.compatibility.exceptionHandlerFor3_0$.runSafely(CompatibilityFor3_0.scala:117)",
      ,
      "org.neo4j.cypher.internal.compatibility.ExecutionResultWrapperFor3_0$$anon$1.next(CompatibilityFor3_0.scala:241)",
      "org.neo4j.cypher.internal.compatibility.ExecutionResultWrapperFor3_0$$anon$1.next(CompatibilityFor3_0.scala:235)",
        "org.neo4j.cypher.internal.javacompat.ExecutionResult.next(ExecutionResult.java:241)",
        "org.neo4j.cypher.internal.javacompat.ExecutionResult.next(ExecutionResult.java:54)",
      "org.neo4j.helpers.collection.ExceptionHandlingIterable$1.next(ExceptionHandlingIterable.java:53)",
        "org.neo4j.helpers.collection.IteratorWrapper.next(IteratorWrapper.java:47)",
        "org.neo4j.server.rest.repr.ListRepresentation.serialize(ListRepresentation.java:64)",
        "org.neo4j.server.rest.repr.Serializer.serialize(Serializer.java:75)",
        "org.neo4j.server.rest.repr.MappingSerializer.putList(MappingSerializer.java:61)",
      "org.neo4j.server.rest.repr.CypherResultRepresentation.serialize(CypherResultRepresentation.java:58)",
        "org.neo4j.server.rest.repr.MappingRepresentation.serialize(MappingRepresentation.java:41)",
        "org.neo4j.server.rest.repr.OutputFormat.assemble(OutputFormat.java:235)",
        "org.neo4j.server.rest.repr.OutputFormat.formatRepresentation(OutputFormat.java:175)",
        "org.neo4j.server.rest.repr.OutputFormat.response(OutputFormat.java:158)",
        "org.neo4j.server.rest.repr.OutputFormat.ok(OutputFormat.java:71)",
        "org.neo4j.server.rest.web.CypherService.cypher(CypherService.java:138)",
        "java.lang.reflect.Method.invoke(Method.java:497)",
      "org.neo4j.server.rest.transactional.TransactionalRequestDispatcher.dispatch(TransactionalRequestDispatcher.java:144)",
        "org.neo4j.server.rest.web.CollectUserAgentFilter.doFilter(CollectUserAgentFilter.java:69)",
        "java.lang.Thread.run(Thread.java:745)"
    ]
  },
]

```



```

"errors": [
  {
    "code": "Neo.DatabaseError.General.UnknownError",
    "stackTrace": "org.neo4j.cypher.internal.frontend.v3_0.ArithmeticException\n\tat
org.neo4j.cypher.internal.compiler.v3_0.commands.expressions.Divide.apply(Divide.scala:36)\n\tat
org.neo4j.cypher.internal.compiler.v3_0.pipes.ProjectionPipe$$anonfun$internalCreateResults$1$$anonfun$app
ly$1.apply(ProjectionPipe.scala:48)\n\tat
org.neo4j.cypher.internal.compiler.v3_0.pipes.ProjectionPipe$$anonfun$internalCreateResults$1$$anonfun$app
ly$1.apply(ProjectionPipe.scala:46)\n\tat scala.collection.immutable.Map$Map1.foreach(Map.scala:116)\n\tat
org.neo4j.cypher.internal.compiler.v3_0.pipes.ProjectionPipe$$anonfun$internalCreateResults$1.apply(Projec
tionPipe.scala:46)\n\tat
org.neo4j.cypher.internal.compiler.v3_0.pipes.ProjectionPipe$$anonfun$internalCreateResults$1.apply(Projec
tionPipe.scala:45)\n\tat scala.collection.Iterator$$anon$11.next(Iterator.scala:409)\n\tat
scala.collection.Iterator$$anon$11.next(Iterator.scala:409)\n\tat
org.neo4j.cypher.internal.compiler.v3_0.ClosingIterator$$anonfun$next$1.apply(ResultIterator.scala:73)\n\tat
at
org.neo4j.cypher.internal.compiler.v3_0.ClosingIterator$$anonfun$next$1.apply(ResultIterator.scala:70)\n\tat
at
org.neo4j.cypher.internal.compiler.v3_0.ClosingIterator$$anonfun$failIfThrows$1.apply(ResultIterator.scala
:93)\n\tat
org.neo4j.cypher.internal.compiler.v3_0.ClosingIterator.decoratedCypherException(ResultIterator.scala:102)
\n\tat org.neo4j.cypher.internal.compiler.v3_0.ClosingIterator.failIfThrows(ResultIterator.scala:91)\n\tat
org.neo4j.cypher.internal.compiler.v3_0.ClosingIterator.next(ResultIterator.scala:70)\n\tat
org.neo4j.cypher.internal.compiler.v3_0.ClosingIterator.next(ResultIterator.scala:48)\n\tat
org.neo4j.cypher.internal.compiler.v3_0.PipeExecutionResult.next(PipeExecutionResult.scala:75)\n\tat
org.neo4j.cypher.internal.compiler.v3_0.PipeExecutionResult$$anon$2.next(PipeExecutionResult.scala:68)\n\tat
at
org.neo4j.cypher.internal.compiler.v3_0.PipeExecutionResult$$anon$2.next(PipeExecutionResult.scala:66)\n\tat
at
org.neo4j.cypher.internal.compatibility.ExecutionResultWrapperFor3_0$$anon$1$$anonfun$next$1.apply(Compati
bilityFor3_0.scala:242)\n\tat
org.neo4j.cypher.internal.compatibility.ExecutionResultWrapperFor3_0$$anon$1$$anonfun$next$1.apply(Compati
bilityFor3_0.scala:242)\n\tat
org.neo4j.cypher.internal.compatibility.exceptionHandlerFor3_0$.runSafely(CompatibilityFor3_0.scala:117)\n\tat
\tat
org.neo4j.cypher.internal.compatibility.ExecutionResultWrapperFor3_0$$anon$1.next(CompatibilityFor3_0.scal
a:241)\n\tat
org.neo4j.cypher.internal.compatibility.ExecutionResultWrapperFor3_0$$anon$1.next(CompatibilityFor3_0.scal
a:235)\n\tat org.neo4j.cypher.internal.javacompat.ExecutionResult.next(ExecutionResult.java:241)\n\tat
org.neo4j.cypher.internal.javacompat.ExecutionResult.next(ExecutionResult.java:54)\n\tat
org.neo4j.helpers.collection.ExceptionHandlingIterable$1.next(ExceptionHandlingIterable.java:53)\n\tat
org.neo4j.helpers.collection.IteratorWrapper.next(IteratorWrapper.java:47)\n\tat
org.neo4j.server.rest.repr.ListRepresentation.serialize(ListRepresentation.java:64)\n\tat
org.neo4j.server.rest.repr.Serializer.serialize(Serializer.java:75)\n\tat
org.neo4j.server.rest.repr.MappingSerializer.putList(MappingSerializer.java:61)\n\tat
org.neo4j.server.rest.repr.CypherResultRepresentation.serialize(CypherResultRepresentation.java:58)\n\tat
org.neo4j.server.rest.repr.MappingRepresentation.serialize(MappingRepresentation.java:41)\n\tat
org.neo4j.server.rest.repr.OutputFormat.assemble(OutputFormat.java:235)\n\tat
org.neo4j.server.rest.repr.OutputFormat.formatRepresentation(OutputFormat.java:175)\n\tat
org.neo4j.server.rest.repr.OutputFormat.response(OutputFormat.java:158)\n\tat
org.neo4j.server.rest.repr.OutputFormat.ok(OutputFormat.java:71)\n\tat
org.neo4j.server.rest.web.CypherService.cypher(CypherService.java:138)\n\tat
sun.reflect.GeneratedMethodAccessor95.invoke(Unknown Source)\n\tat
sun.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)\n\tat
java.lang.reflect.Method.invoke(Method.java:497)\n\tat
com.sun.jersey.spi.container.JavaMethodInvokerFactory$1.invoke(JavaMethodInvokerFactory.java:60)\n\tat
com.sun.jersey.server.impl.model.method.dispatch.AbstractResourceMethodDispatchProvider$ResponseOutInvoker
._dispatch(AbstractResourceMethodDispatchProvider.java:205)\n\tat
com.sun.jersey.server.impl.model.method.dispatch.ResourceJavaMethodDispatcher.dispatch(ResourceJavaMethodD
ispatcher.java:75)\n\tat
org.neo4j.server.rest.transactional.TransactionalRequestDispatcher.dispatch(TransactionalRequestDispatcher
.java:144)\n\tat com.sun.jersey.server.impl.uri.rules.HttpMethodRule.accept(HttpMethodRule.java:302)\n\tat
com.sun.jersey.server.impl.uri.rules.ResourceClassRule.accept(ResourceClassRule.java:108)\n\tat
com.sun.jersey.server.impl.uri.rules.RightHandPathRule.accept(RightHandPathRule.java:147)\n\tat
com.sun.jersey.server.impl.uri.rules.RootResourceClassesRule.accept(RootResourceClassesRule.java:84)\n\tat
com.sun.jersey.server.impl.application.WebApplicationImpl._handleRequest(WebApplicationImpl.java:1542)\n\tat
at
com.sun.jersey.server.impl.application.WebApplicationImpl._handleRequest(WebApplicationImpl.java:1473)\n\tat
at
com.sun.jersey.server.impl.application.WebApplicationImpl.handleRequest(WebApplicationImpl.java:1419)\n\tat
t
com.sun.jersey.server.impl.application.WebApplicationImpl.handleRequest(WebApplicationImpl.java:1409)\n\tat
com.sun.jersey.server.impl.application.WebApplicationImpl.handleRequest(WebApplicationImpl.java:1409)\n\tat
com.sun.jersey.spi.container.servlet.WebComponent.service(WebComponent.java:409)\n\tat
com.sun.jersey.spi.container.servlet.ServletContainer.service(ServletContainer.java:558)\n\tat
com.sun.jersey.spi.container.servlet.ServletContainer.service(ServletContainer.java:733)\n\tat
javax.servlet.http.HttpServlet.service(HttpServlet.java:790)\n\tat
org.eclipse.jetty.servlet.ServletHolder.handle(ServletHolder.java:808)\n\tat
org.eclipse.jetty.servlet.ServletHandler$CachedChain.doFilter(ServletHandler.java:1669)\n\tat
org.neo4j.server.rest.web.CollectUserAgentFilter.doFilter(CollectUserAgentFilter.java:69)\n\tat
org.eclipse.jetty.servlet.ServletHandler$CachedChain.doFilter(ServletHandler.java:1652)\n\tat

```

```

org.eclipse.jetty.servlet.ServletHandler.doHandle(ServletHandler.java:585)\n\tat
org.eclipse.jetty.server.session.SessionHandler.doHandle(SessionHandler.java:221)\n\tat
org.eclipse.jetty.server.handler.ContextHandler.doHandle(ContextHandler.java:1127)\n\tat
org.eclipse.jetty.servlet.ServletHandler.doScope(ServletHandler.java:515)\n\tat
org.eclipse.jetty.server.session.SessionHandler.doScope(SessionHandler.java:185)\n\tat
org.eclipse.jetty.server.handler.ContextHandler.doScope(ContextHandler.java:1061)\n\tat
org.eclipse.jetty.server.handler.ScopedHandler.handle(ScopedHandler.java:141)\n\tat
org.eclipse.jetty.server.handler.HandlerList.handle(HandlerList.java:52)\n\tat
org.eclipse.jetty.server.handler.HandlerWrapper.handle(HandlerWrapper.java:97)\n\tat
org.eclipse.jetty.server.Server.handle(Server.java:497)\n\tat
org.eclipse.jetty.server.HttpChannel.handle(HttpChannel.java:310)\n\tat
org.eclipse.jetty.server.HttpConnection.onFillable(HttpConnection.java:257)\n\tat
org.eclipse.jetty.io.AbstractConnection$2.run(AbstractConnection.java:540)\n\tat
org.eclipse.jetty.util.thread.QueuedThreadPool.runJob(QueuedThreadPool.java:635)\n\tat
org.eclipse.jetty.util.thread.QueuedThreadPool$3.run(QueuedThreadPool.java:555)\n\tat
java.lang.Thread.run(Thread.java:745)\n"
    }
  ],
  "fullname": "org.neo4j.cypher.ArithmeticException",
  "stackTrace": [
    "org.neo4j.cypher.internal.compatibility.exceptionHandlerFor3_0$.arithmeticException(CompatibilityFor3_0.s
cala:64)",
    "org.neo4j.cypher.internal.compatibility.exceptionHandlerFor3_0$.arithmeticException(CompatibilityFor3_0.s
cala:61)",
    "org.neo4j.cypher.internal.frontend.v3_0.ArithmeticException.mapToPublic(CypherException.scala:98)",
    "org.neo4j.cypher.internal.compatibility.exceptionHandlerFor3_0$.runSafely(CompatibilityFor3_0.scala:122)"
,
    "org.neo4j.cypher.internal.compatibility.ExecutionResultWrapperFor3_0$$anon$1.next(CompatibilityFor3_0.sca
la:241)",
    "org.neo4j.cypher.internal.compatibility.ExecutionResultWrapperFor3_0$$anon$1.next(CompatibilityFor3_0.sca
la:235)",
    "org.neo4j.cypher.internal.javacompat.ExecutionResult.next(ExecutionResult.java:241)",
    "org.neo4j.cypher.internal.javacompat.ExecutionResult.next(ExecutionResult.java:54)",
    "org.neo4j.helpers.collection.ExceptionHandlingIterable$1.next(ExceptionHandlingIterable.java:53)",
    "org.neo4j.helpers.collection.IteratorWrapper.next(IteratorWrapper.java:47)",
    "org.neo4j.server.rest.repr.ListRepresentation.serialize(ListRepresentation.java:64)",
    "org.neo4j.server.rest.repr.Serializer.serialize(Serializer.java:75)",
    "org.neo4j.server.rest.repr.MappingSerializer.putList(MappingSerializer.java:61)",
    "org.neo4j.server.rest.repr.CypherResultRepresentation.serialize(CypherResultRepresentation.java:58)",
    "org.neo4j.server.rest.repr.MappingRepresentation.serialize(MappingRepresentation.java:41)",
    "org.neo4j.server.rest.repr.OutputFormat.assemble(OutputFormat.java:235)",
    "org.neo4j.server.rest.repr.OutputFormat.formatRepresentation(OutputFormat.java:175)",
    "org.neo4j.server.rest.repr.OutputFormat.response(OutputFormat.java:158)",
    "org.neo4j.server.rest.repr.OutputFormat.ok(OutputFormat.java:71)",
    "org.neo4j.server.rest.web.CypherService.cypher(CypherService.java:138)",
    "java.lang.reflect.Method.invoke(Method.java:497)",
    "org.neo4j.server.rest.transactional.TransactionalRequestDispatcher.dispatch(TransactionalRequestDispatche
r.java:144)",
    "org.neo4j.server.rest.web.CollectUserAgentFilter.doFilter(CollectUserAgentFilter.java:69)",
    "java.lang.Thread.run(Thread.java:745)"
  ],
  "message": "/ by zero",
  "errors": [
    {
      "code": "Neo.ClientError.Statement.ArithmeticError",
      "message": "/ by zero"
    }
  ]
},
"fullname": "org.neo4j.kernel.impl.query.QueryExecutionKernelException",
"stackTrace": [
  "org.neo4j.cypher.internal.javacompat.ExecutionResult.converted(ExecutionResult.java:399)",
  "org.neo4j.cypher.internal.javacompat.ExecutionResult.next(ExecutionResult.java:245)",
  "org.neo4j.cypher.internal.javacompat.ExecutionResult.next(ExecutionResult.java:54)",
  "org.neo4j.helpers.collection.ExceptionHandlingIterable$1.next(ExceptionHandlingIterable.java:53)",
  "org.neo4j.helpers.collection.IteratorWrapper.next(IteratorWrapper.java:47)",
  "org.neo4j.server.rest.repr.ListRepresentation.serialize(ListRepresentation.java:64)",
  "org.neo4j.server.rest.repr.Serializer.serialize(Serializer.java:75)",
  "org.neo4j.server.rest.repr.MappingSerializer.putList(MappingSerializer.java:61)",

```

```

"org.neo4j.server.rest.repr.CypherResultRepresentation.serialize(CypherResultRepresentation.java:58)",
"org.neo4j.server.rest.repr.MappingRepresentation.serialize(MappingRepresentation.java:41)",
"org.neo4j.server.rest.repr.OutputFormat.assemble(OutputFormat.java:235)",
"org.neo4j.server.rest.repr.OutputFormat.formatRepresentation(OutputFormat.java:175)",
"org.neo4j.server.rest.repr.OutputFormat.response(OutputFormat.java:158)",
"org.neo4j.server.rest.repr.OutputFormat.ok(OutputFormat.java:71)",
"org.neo4j.server.rest.web.CypherService.cypher(CypherService.java:138)",
"java.lang.reflect.Method.invoke(Method.java:497)",

"org.neo4j.server.rest.transactional.TransactionalRequestDispatcher.dispatch(TransactionalRequestDispatcher.java:144)",
"org.neo4j.server.rest.web.CollectUserAgentFilter.doFilter(CollectUserAgentFilter.java:69)",
"java.lang.Thread.run(Thread.java:745)"
],
"message": "/ by zero",
"errors": [
{
"code": "Neo.ClientError.Statement.ArithmeticError",
"message": "/ by zero"
}
]
},
"fullname": "org.neo4j.graphdb.QueryExecutionException",
"stackTrace": [

"org.neo4j.kernel.impl.query.QueryExecutionKernelException.asUserException(QueryExecutionKernelException.java:35)",
"org.neo4j.cypher.internal.javacompat.ExecutionResult.converted(ExecutionResult.java:399)",
"org.neo4j.cypher.internal.javacompat.ExecutionResult.next(ExecutionResult.java:245)",
"org.neo4j.cypher.internal.javacompat.ExecutionResult.next(ExecutionResult.java:54)",
"org.neo4j.helpers.collection.ExceptionHandlingIterable$1.next(ExceptionHandlingIterable.java:53)",
"org.neo4j.helpers.collection.IteratorWrapper.next(IteratorWrapper.java:47)",
"org.neo4j.server.rest.repr.ListRepresentation.serialize(ListRepresentation.java:64)",
"org.neo4j.server.rest.repr.Serializer.serialize(Serializer.java:75)",
"org.neo4j.server.rest.repr.MappingSerializer.putList(MappingSerializer.java:61)",

"org.neo4j.server.rest.repr.CypherResultRepresentation.serialize(CypherResultRepresentation.java:58)",
"org.neo4j.server.rest.repr.MappingRepresentation.serialize(MappingRepresentation.java:41)",
"org.neo4j.server.rest.repr.OutputFormat.assemble(OutputFormat.java:235)",
"org.neo4j.server.rest.repr.OutputFormat.formatRepresentation(OutputFormat.java:175)",
"org.neo4j.server.rest.repr.OutputFormat.response(OutputFormat.java:158)",
"org.neo4j.server.rest.repr.OutputFormat.ok(OutputFormat.java:71)",
"org.neo4j.server.rest.web.CypherService.cypher(CypherService.java:138)",
"java.lang.reflect.Method.invoke(Method.java:497)",

"org.neo4j.server.rest.transactional.TransactionalRequestDispatcher.dispatch(TransactionalRequestDispatcher.java:144)",
"org.neo4j.server.rest.web.CollectUserAgentFilter.doFilter(CollectUserAgentFilter.java:69)",
"java.lang.Thread.run(Thread.java:745)"
],
"message": "/ by zero",
"errors": [
{
"code": "Neo.ClientError.Statement.ArithmeticError",
"message": "/ by zero"
}
]
},
"errors": [
{
"code": "Neo.ClientError.Request.InvalidFormat",
"message": "/ by zero"
}
]
}
}

```

Property values

The REST API allows setting properties on nodes and relationships through direct RESTful operations. However, there are restrictions as to what types of values can be used as property values. Allowed value types are as follows:

- Numbers: Both integer values, with capacity as Java's Long type, and floating points, with capacity as Java's Double.
- Booleans.
- Strings.
- Arrays of the basic types above.

Arrays

There are two important points to be made about array values. First, all values in the array must be of the same type. That means either all integers, all floats, all booleans or all strings. Mixing types is not currently supported.

Second, storing empty arrays is only possible given certain preconditions. Because the JSON transfer format does not contain type information for arrays, type is inferred from the values in the array. If the array is empty, the Neo4j Server cannot determine the type. In these cases, it will check if an array is already stored for the given property, and will use the stored array's type when storing the empty array. If no array exists already, the server will reject the request.

Property keys

You can list all property keys ever used in the database. This includes and property keys you have used, but deleted.

There is currently no way to tell which ones are in use and which ones are not, short of walking the entire set of properties in the database.

List all property keys

Example request

- **GET** `http://localhost:7474/db/data/propertykeys`
- **Accept:** `application/json; charset=UTF-8`

Example response

- **200:** OK
- **Content-Type:** `application/json; charset=UTF-8`

```
[ "name", "prop", "isbn" ]
```

Nodes

Create node




Figure 12. Final Graph

Example request

- **POST** `http://localhost:7474/db/data/node`
- **Accept:** `application/json; charset=UTF-8`

Example response

- **201:** Created
- **Content-Type:** `application/json; charset=UTF-8`
- **Location:** `http://localhost:7474/db/data/node/111`

```
{
  "extensions" : { },
  "metadata" : {
    "id" : 111,
    "labels" : [ ]
  },
  "paged_traverse" :
"http://localhost:7474/db/data/node/111/paged/traverse/{returnType}{?pageSize,leaseTime}",
  "outgoing_relationships" : "http://localhost:7474/db/data/node/111/relationships/out",
  "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/111/relationships/out/{-list|&|types}",
  "create_relationship" : "http://localhost:7474/db/data/node/111/relationships",
  "labels" : "http://localhost:7474/db/data/node/111/labels",
  "traverse" : "http://localhost:7474/db/data/node/111/traverse/{returnType}",
  "all_relationships" : "http://localhost:7474/db/data/node/111/relationships/all",
  "all_typed_relationships" : "http://localhost:7474/db/data/node/111/relationships/all/{-list|&|types}",
  "property" : "http://localhost:7474/db/data/node/111/properties/{key}",
  "self" : "http://localhost:7474/db/data/node/111",
  "incoming_relationships" : "http://localhost:7474/db/data/node/111/relationships/in",
  "properties" : "http://localhost:7474/db/data/node/111/properties",
  "incoming_typed_relationships" : "http://localhost:7474/db/data/node/111/relationships/in/{-list|&|types}",
  "data" : { }
}
```

Create node with properties




Figure 13. Final Graph

Example request

- **POST** `http://localhost:7474/db/data/node`
- **Accept:** `application/json; charset=UTF-8`
- **Content-Type:** `application/json`

```
{
  "foo" : "bar"
}
```

Example response

- **201:** Created
- **Content-Length:** 1237
- **Content-Type:** application/json; charset=UTF-8
- **Location:** http://localhost:7474/db/data/node/107

```
{
  "extensions" : { },
  "metadata" : {
    "id" : 107,
    "labels" : [ ]
  },
  "paged_traverse" :
"http://localhost:7474/db/data/node/107/paged/traverse/{returnType}?pageSize,leaseTime",
  "outgoing_relationships" : "http://localhost:7474/db/data/node/107/relationships/out",
  "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/107/relationships/out/{-list|&|types}",
  "create_relationship" : "http://localhost:7474/db/data/node/107/relationships",
  "labels" : "http://localhost:7474/db/data/node/107/labels",
  "traverse" : "http://localhost:7474/db/data/node/107/traverse/{returnType}",
  "all_relationships" : "http://localhost:7474/db/data/node/107/relationships/all",
  "all_typed_relationships" : "http://localhost:7474/db/data/node/107/relationships/all/{-list|&|types}",
  "property" : "http://localhost:7474/db/data/node/107/properties/{key}",
  "self" : "http://localhost:7474/db/data/node/107",
  "incoming_relationships" : "http://localhost:7474/db/data/node/107/relationships/in",
  "properties" : "http://localhost:7474/db/data/node/107/properties",
  "incoming_typed_relationships" : "http://localhost:7474/db/data/node/107/relationships/in/{-list|&|types}",
  "data" : {
    "foo" : "bar"
  }
}
```

Get node

Note that the response contains URI/templates for the available operations for getting properties and relationships.




Figure 14. Final Graph

Example request

- **GET** http://localhost:7474/db/data/node/182
- **Accept:** application/json; charset=UTF-8

Example response

- **200:** OK
- **Content-Type:** application/json; charset=UTF-8

```

{
  "extensions" : { },
  "metadata" : {
    "id" : 182,
    "labels" : [ ]
  },
  "paged_traverse" :
"http://localhost:7474/db/data/node/182/paged/traverse/{returnType}{?pageSize,leaseTime}",
  "outgoing_relationships" : "http://localhost:7474/db/data/node/182/relationships/out",
  "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/182/relationships/out/{-list|&|types}",
  "create_relationship" : "http://localhost:7474/db/data/node/182/relationships",
  "labels" : "http://localhost:7474/db/data/node/182/labels",
  "traverse" : "http://localhost:7474/db/data/node/182/traverse/{returnType}",
  "all_relationships" : "http://localhost:7474/db/data/node/182/relationships/all",
  "all_typed_relationships" : "http://localhost:7474/db/data/node/182/relationships/all/{-list|&|types}",
  "property" : "http://localhost:7474/db/data/node/182/properties/{key}",
  "self" : "http://localhost:7474/db/data/node/182",
  "incoming_relationships" : "http://localhost:7474/db/data/node/182/relationships/in",
  "properties" : "http://localhost:7474/db/data/node/182/properties",
  "incoming_typed_relationships" : "http://localhost:7474/db/data/node/182/relationships/in/{-list|&|types}",
  "data" : { }
}

```

Get non-existent node




Figure 15. Final Graph

Example request

- **GET** http://localhost:7474/db/data/node/18600000
- **Accept:** application/json; charset=UTF-8

Example response

- **404:** Not Found
- **Content-Type:** application/json; charset=UTF-8

```

{
  "message": "Cannot find node with id [18600000] in database.",
  "exception": "NodeNotFoundException",
  "fullname": "org.neo4j.server.rest.web.NodeNotFoundException",
  "stackTrace": [
    "org.neo4j.server.rest.web.DatabaseActions.node(DatabaseActions.java:166)",
    "org.neo4j.server.rest.web.DatabaseActions.getNode(DatabaseActions.java:211)",
    "org.neo4j.server.rest.web.RestfulGraphDatabase.getNode(RestfulGraphDatabase.java:279)",
    "java.lang.reflect.Method.invoke(Method.java:497)",
    "org.neo4j.server.rest.transactional.TransactionalRequestDispatcher.dispatch(TransactionalRequestDispatche
r.java:144)",
    "org.neo4j.server.rest.web.CollectUserAgentFilter.doFilter(CollectUserAgentFilter.java:69)",
    "java.lang.Thread.run(Thread.java:745)"
  ],
  "cause": {
    "exception": "NotFoundException",
    "cause": {
      "exception": "EntityNotFoundException",
      "fullname": "org.neo4j.kernel.api.exceptions.EntityNotFoundException",
      "stackTrace": [
        "org.neo4j.kernel.impl.factory.GraphDatabaseFacade.getNodeById(GraphDatabaseFacade.java:271)",
        "org.neo4j.server.rest.web.DatabaseActions.node(DatabaseActions.java:162)",
        "org.neo4j.server.rest.web.DatabaseActions.getNode(DatabaseActions.java:211)",
        "org.neo4j.server.rest.web.RestfulGraphDatabase.getNode(RestfulGraphDatabase.java:279)",
        "java.lang.reflect.Method.invoke(Method.java:497)",
        "org.neo4j.server.rest.transactional.TransactionalRequestDispatcher.dispatch(TransactionalRequestDispatche
r.java:144)",
        "org.neo4j.server.rest.web.CollectUserAgentFilter.doFilter(CollectUserAgentFilter.java:69)",
        "java.lang.Thread.run(Thread.java:745)"
      ],
      "message": "Unable to load NODE with id 18600000.",
      "errors": [
        {
          "code": "Neo.ClientError.Statement.EntityNotFound",
          "message": "Unable to load NODE with id 18600000."
        }
      ]
    }
  },
  "fullname": "org.neo4j.graphdb.NotFoundException",
  "stackTrace": [
    "org.neo4j.kernel.impl.factory.GraphDatabaseFacade.getNodeById(GraphDatabaseFacade.java:271)",
    "org.neo4j.server.rest.web.DatabaseActions.node(DatabaseActions.java:162)",
    "org.neo4j.server.rest.web.DatabaseActions.getNode(DatabaseActions.java:211)",
    "org.neo4j.server.rest.web.RestfulGraphDatabase.getNode(RestfulGraphDatabase.java:279)",
    "java.lang.reflect.Method.invoke(Method.java:497)",
    "org.neo4j.server.rest.transactional.TransactionalRequestDispatcher.dispatch(TransactionalRequestDispatche
r.java:144)",
    "org.neo4j.server.rest.web.CollectUserAgentFilter.doFilter(CollectUserAgentFilter.java:69)",
    "java.lang.Thread.run(Thread.java:745)"
  ],
  "message": "Node 18600000 not found",
  "errors": [
    {
      "code": "Neo.ClientError.Statement.EntityNotFound",
      "message": "Node 18600000 not found"
    }
  ],
  "errors": [
    {
      "code": "Neo.ClientError.Statement.EntityNotFound",
      "message": "Cannot find node with id [18600000] in database."
    }
  ]
}

```

Delete node




Figure 16. Starting Graph

Figure 17. Final Graph

Example request

- **DELETE** http://localhost:7474/db/data/node/108
- **Accept:** application/json; charset=UTF-8

Example response

- **204:** No Content

Nodes with relationships cannot be deleted

The relationships on a node has to be deleted before the node can be deleted.



You can use **DETACH DELETE** in Cypher to delete nodes and their relationships in one go.




Figure 18. Starting Graph

Example request

- **DELETE** http://localhost:7474/db/data/node/115
- **Accept:** application/json; charset=UTF-8

Example response

- **409:** Conflict
- **Content-Type:** application/json; charset=UTF-8

```
{
  "message": "The node with id 115 cannot be deleted. Check that the node is orphaned before deletion.",
  "exception": "ConstraintViolationException",
  "fullname": "org.neo4j.graphdb.ConstraintViolationException",
  "stackTrace": [
    "org.neo4j.server.rest.web.DatabaseActions.deleteNode(DatabaseActions.java:221)",
    "org.neo4j.server.rest.web.RestfulGraphDatabase.deleteNode(RestfulGraphDatabase.java:293)",
    "java.lang.reflect.Method.invoke(Method.java:497)",
    "org.neo4j.server.rest.transactional.TransactionalRequestDispatcher.dispatch(TransactionalRequestDispatcher.java:144)",
    "org.neo4j.server.rest.web.CollectUserAgentFilter.doFilter(CollectUserAgentFilter.java:69)",
    "java.lang.Thread.run(Thread.java:745)"
  ],
  "errors": [
    {
      "code": "Neo.ClientError.Schema.ConstraintValidationFailed",
      "message": "The node with id 115 cannot be deleted. Check that the node is orphaned before deletion."
    }
  ]
}
```

Relationships

Relationships are a first class citizen in the Neo4j REST API. They can be accessed either stand-alone or through the nodes they are attached to.

The general pattern to get relationships from a node is:

```
GET http://localhost:7474/db/data/node/123/relationships/{dir}/{-list|&|types}
```

Where dir is one of all, in, out and types is an ampersand-separated list of types. See the examples below for more information.

Get Relationship by ID




Figure 19. Final Graph

Example request

- **GET** `http://localhost:7474/db/data/relationship/46`
- **Accept:** `application/json; charset=UTF-8`

Example response

- **200:** OK
- **Content-Type:** `application/json; charset=UTF-8`

```
{
  "extensions" : { },
  "metadata" : {
    "id" : 46,
    "type" : "know"
  },
  "property" : "http://localhost:7474/db/data/relationship/46/properties/{key}",
  "start" : "http://localhost:7474/db/data/node/70",
  "self" : "http://localhost:7474/db/data/relationship/46",
  "end" : "http://localhost:7474/db/data/node/71",
  "type" : "know",
  "properties" : "http://localhost:7474/db/data/relationship/46/properties",
  "data" : { }
}
```

Create relationship

Upon successful creation of a relationship, the new relationship is returned.




Figure 20. Starting Graph




Figure 21. Final Graph

Example request

- **POST** <http://localhost:7474/db/data/node/0/relationships>
- **Accept:** application/json; charset=UTF-8
- **Content-Type:** application/json

```
{
  "to" : "http://localhost:7474/db/data/node/1",
  "type" : "LOVES"
}
```

Example response

- **201:** Created
- **Content-Type:** application/json; charset=UTF-8
- **Location:** <http://localhost:7474/db/data/relationship/1>

```
{
  "extensions" : { },
  "metadata" : {
    "id" : 1,
    "type" : "LOVES"
  },
  "property" : "http://localhost:7474/db/data/relationship/1/properties/{key}",
  "start" : "http://localhost:7474/db/data/node/0",
  "self" : "http://localhost:7474/db/data/relationship/1",
  "end" : "http://localhost:7474/db/data/node/1",
  "type" : "LOVES",
  "properties" : "http://localhost:7474/db/data/relationship/1/properties",
  "data" : { }
}
```

Create a relationship with properties

Upon successful creation of a relationship, the new relationship is returned.




Figure 22. Starting Graph




Figure 23. Final Graph

Example request

- **POST** <http://localhost:7474/db/data/node/10/relationships>
- **Accept:** application/json; charset=UTF-8
- **Content-Type:** application/json

```

{
  "to" : "http://localhost:7474/db/data/node/11",
  "type" : "LOVES",
  "data" : {
    "foo" : "bar"
  }
}
  
```

Example response

- **201:** Created
- **Content-Type:** application/json; charset=UTF-8
- **Location:** <http://localhost:7474/db/data/relationship/8>

```

{
  "extensions" : { },
  "metadata" : {
    "id" : 8,
    "type" : "LOVES"
  },
  "property" : "http://localhost:7474/db/data/relationship/8/properties/{key}",
  "start" : "http://localhost:7474/db/data/node/10",
  "self" : "http://localhost:7474/db/data/relationship/8",
  "end" : "http://localhost:7474/db/data/node/11",
  "type" : "LOVES",
  "properties" : "http://localhost:7474/db/data/relationship/8/properties",
  "data" : {
    "foo" : "bar"
  }
}
  
```

Delete relationship




Figure 24. Starting Graph



Figure 25. Final Graph

Example request

- **DELETE** <http://localhost:7474/db/data/relationship/39>
- **Accept:** application/json; charset=UTF-8

Example response

- **204:** No Content



Get all properties on a relationship





Figure 26. Final Graph

Example request

- **GET** <http://localhost:7474/db/data/relationship/42/properties>
- **Accept:** application/json; charset=UTF-8

Example response

- **200:** OK
- **Content-Type:** application/json; charset=UTF-8

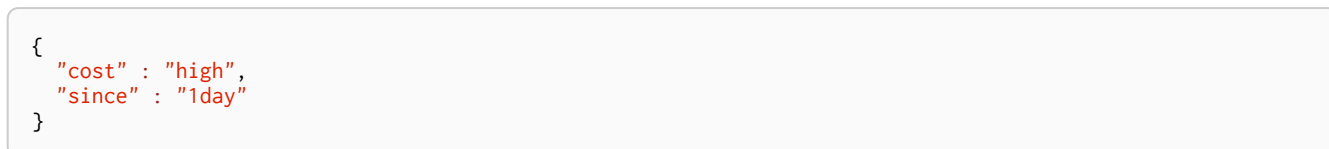

Set all properties on a relationship




Figure 27. Starting Graph




Figure 28. Final Graph

Example request

- **PUT** <http://localhost:7474/db/data/relationship/47/properties>
- **Accept:** application/json; charset=UTF-8
- **Content-Type:** application/json

```
{  
  "happy" : false  
}
```

Example response

- **204:** No Content

Get single property on a relationship




Figure 29. Final Graph

Example request

- **GET** <http://localhost:7474/db/data/relationship/43/properties/cost>
- **Accept:** application/json; charset=UTF-8

Example response

- **200:** OK
- **Content-Type:** application/json; charset=UTF-8

"high"

Set single property on a relationship




Figure 30. Starting Graph




Figure 31. Final Graph

Example request

- **PUT** http://localhost:7474/db/data/relationship/41/properties/cost
- **Accept:** application/json; charset=UTF-8
- **Content-Type:** application/json

"deadly"

Example response

- **204:** No Content

Get all relationships

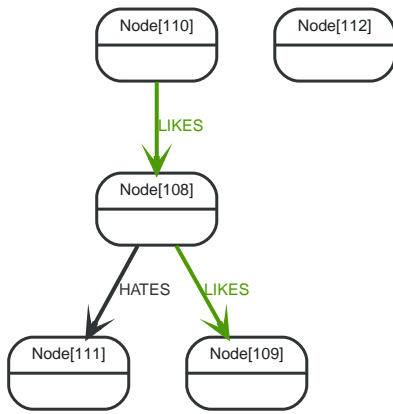


Figure 32. Final Graph

Example request

- **GET** <http://localhost:7474/db/data/node/108/relationships/all>
- **Accept:** application/json; charset=UTF-8

Example response

- **200:** OK
- **Content-Type:** application/json; charset=UTF-8

```
[ {
  "extensions" : { },
  "metadata" : {
    "id" : 35,
    "type" : "HATES"
  },
  "data" : { },
  "property" : "http://localhost:7474/db/data/relationship/35/properties/{key}",
  "start" : "http://localhost:7474/db/data/node/108",
  "self" : "http://localhost:7474/db/data/relationship/35",
  "end" : "http://localhost:7474/db/data/node/111",
  "type" : "HATES",
  "properties" : "http://localhost:7474/db/data/relationship/35/properties"
}, {
  "extensions" : { },
  "metadata" : {
    "id" : 34,
    "type" : "LIKES"
  },
  "data" : { },
  "property" : "http://localhost:7474/db/data/relationship/34/properties/{key}",
  "start" : "http://localhost:7474/db/data/node/110",
  "self" : "http://localhost:7474/db/data/relationship/34",
  "end" : "http://localhost:7474/db/data/node/108",
  "type" : "LIKES",
  "properties" : "http://localhost:7474/db/data/relationship/34/properties"
}, {
  "extensions" : { },
  "metadata" : {
    "id" : 33,
    "type" : "LIKES"
  },
  "data" : { },
  "property" : "http://localhost:7474/db/data/relationship/33/properties/{key}",
  "start" : "http://localhost:7474/db/data/node/108",
  "self" : "http://localhost:7474/db/data/relationship/33",
  "end" : "http://localhost:7474/db/data/node/109",
  "type" : "LIKES",
  "properties" : "http://localhost:7474/db/data/relationship/33/properties"
} ]
```

Get incoming relationships

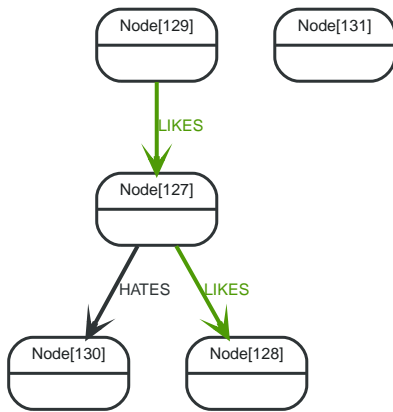


Figure 33. Final Graph

Example request

- **GET** <http://localhost:7474/db/data/node/127/relationships/in>
- **Accept:** application/json; charset=UTF-8

Example response

- **200:** OK
- **Content-Type:** application/json; charset=UTF-8

```
[ {  
  "extensions" : { },  
  "metadata" : {  
    "id" : 45,  
    "type" : "LIKES"  
  },  
  "data" : { },  
  "property" : "http://localhost:7474/db/data/relationship/45/properties/{key}",  
  "start" : "http://localhost:7474/db/data/node/129",  
  "self" : "http://localhost:7474/db/data/relationship/45",  
  "end" : "http://localhost:7474/db/data/node/127",  
  "type" : "LIKES",  
  "properties" : "http://localhost:7474/db/data/relationship/45/properties"  
} ]
```

Get outgoing relationships

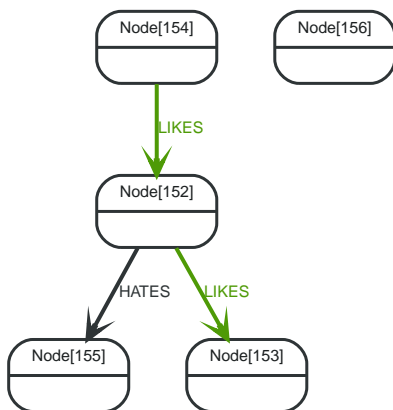


Figure 34. Final Graph

Example request

- **GET** `http://localhost:7474/db/data/node/152/relationships/out`
- **Accept:** `application/json; charset=UTF-8`

Example response

- **200:** OK
- **Content-Type:** `application/json; charset=UTF-8`

```
[ {
  "extensions" : { },
  "metadata" : {
    "id" : 61,
    "type" : "HATES"
  },
  "data" : { },
  "property" : "http://localhost:7474/db/data/relationship/61/properties/{key}",
  "start" : "http://localhost:7474/db/data/node/152",
  "self" : "http://localhost:7474/db/data/relationship/61",
  "end" : "http://localhost:7474/db/data/node/155",
  "type" : "HATES",
  "properties" : "http://localhost:7474/db/data/relationship/61/properties"
}, {
  "extensions" : { },
  "metadata" : {
    "id" : 59,
    "type" : "LIKES"
  },
  "data" : { },
  "property" : "http://localhost:7474/db/data/relationship/59/properties/{key}",
  "start" : "http://localhost:7474/db/data/node/152",
  "self" : "http://localhost:7474/db/data/relationship/59",
  "end" : "http://localhost:7474/db/data/node/153",
  "type" : "LIKES",
  "properties" : "http://localhost:7474/db/data/relationship/59/properties"
} ]
```

Get typed relationships

Note that the "&" needs to be encoded like "%26" for example when using [cURL](http://curl.haxx.se/) (`http://curl.haxx.se/`) from the terminal.

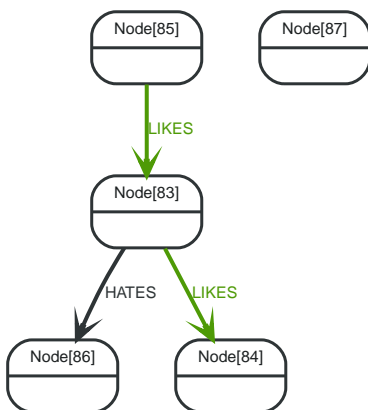


Figure 35. Final Graph

Example request

- **GET** `http://localhost:7474/db/data/node/83/relationships/all/LIKES&HATES`
- **Accept:** `application/json; charset=UTF-8`

Example response

- 200: OK
- Content-Type: application/json; charset=UTF-8

```
[ {
  "extensions" : { },
  "metadata" : {
    "id" : 20,
    "type" : "HATES"
  },
  "data" : { },
  "property" : "http://localhost:7474/db/data/relationship/20/properties/{key}",
  "start" : "http://localhost:7474/db/data/node/83",
  "self" : "http://localhost:7474/db/data/relationship/20",
  "end" : "http://localhost:7474/db/data/node/86",
  "type" : "HATES",
  "properties" : "http://localhost:7474/db/data/relationship/20/properties"
}, {
  "extensions" : { },
  "metadata" : {
    "id" : 19,
    "type" : "LIKES"
  },
  "data" : { },
  "property" : "http://localhost:7474/db/data/relationship/19/properties/{key}",
  "start" : "http://localhost:7474/db/data/node/85",
  "self" : "http://localhost:7474/db/data/relationship/19",
  "end" : "http://localhost:7474/db/data/node/83",
  "type" : "LIKES",
  "properties" : "http://localhost:7474/db/data/relationship/19/properties"
}, {
  "extensions" : { },
  "metadata" : {
    "id" : 18,
    "type" : "LIKES"
  },
  "data" : { },
  "property" : "http://localhost:7474/db/data/relationship/18/properties/{key}",
  "start" : "http://localhost:7474/db/data/node/83",
  "self" : "http://localhost:7474/db/data/relationship/18",
  "end" : "http://localhost:7474/db/data/node/84",
  "type" : "LIKES",
  "properties" : "http://localhost:7474/db/data/relationship/18/properties"
} ]
```

Get relationships on a node without relationships

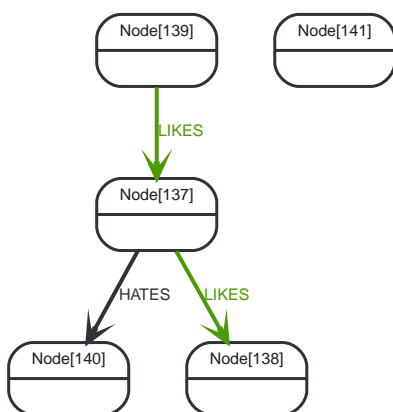


Figure 36. Final Graph

Example request

- GET <http://localhost:7474/db/data/node/141/relationships/all>
- Accept: application/json; charset=UTF-8

Example response

- **200:** OK
- **Content-Type:** application/json; charset=UTF-8

[]

Relationship types

Get relationship types

Example request

- **GET** http://localhost:7474/db/data/relationship/types
- **Accept:** application/json; charset=UTF-8

Example response

- **200:** OK
- **Content-Type:** application/json

```
[ "KNOWS", "LOVES" ]
```

Node properties

Set property on node

Setting different properties will retain the existing ones for this node. Note that a single value are submitted not as a map but just as a value (which is valid JSON) like in the example below.




Figure 37. Final Graph

Example request

- **PUT** `http://localhost:7474/db/data/node/11/properties/foo`
- **Accept:** `application/json; charset=UTF-8`
- **Content-Type:** `application/json`

```
"bar"
```

Example response

- **204:** No Content

Update node properties

This will replace all existing properties on the node with the new set of attributes.




Figure 38. Final Graph

Example request

- **PUT** `http://localhost:7474/db/data/node/10/properties`
- **Accept:** `application/json; charset=UTF-8`
- **Content-Type:** `application/json`

```
{  
  "age" : "18"  
}
```

Example response

- **204:** No Content

Get properties for node




Figure 39. Final Graph

Example request

- **GET** `http://localhost:7474/db/data/node/172/properties`
- **Accept:** `application/json; charset=UTF-8`

Example response

- **200:** OK
- **Content-Type:** `application/json; charset=UTF-8`

```
{  
  "foo" : "bar"  
}
```

Get property for node

Get a single node property from a node.




Figure 40. Final Graph

Example request

- **GET** `http://localhost:7474/db/data/node/171/properties/foo`
- **Accept:** `application/json; charset=UTF-8`

Example response

- **200:** OK
- **Content-Type:** `application/json; charset=UTF-8`

```
"bar"
```

Property values can not be null

This example shows the response you get when trying to set a property to null.

Example request

- **POST** `http://localhost:7474/db/data/node`

- **Accept:** application/json; charset=UTF-8
- **Content-Type:** application/json

```
{
  "foo" : null
}
```

Example response

- **400:** Bad Request
- **Content-Type:** application/json; charset=UTF-8

```
{
  "message": "Could not set property \"foo\", unsupported type: null",
  "exception": "PropertyValueException",
  "fullname": "org.neo4j.server.rest.web.PropertyValueException",
  "stackTrace": [
    "org.neo4j.server.rest.domain.PropertySettingStrategy.setProperty(PropertySettingStrategy.java:141)",
    "org.neo4j.server.rest.domain.PropertySettingStrategy.setProperties(PropertySettingStrategy.java:88)",
    "org.neo4j.server.rest.web.DatabaseActions.createNode(DatabaseActions.java:197)",
    "org.neo4j.server.rest.web.RestfulGraphDatabase.createNode(RestfulGraphDatabase.java:252)",
    "java.lang.reflect.Method.invoke(Method.java:497)",
    "org.neo4j.server.rest.transactional.TransactionalRequestDispatcher.dispatch(TransactionalRequestDispatcher.java:144)",
    "org.neo4j.server.rest.web.CollectUserAgentFilter.doFilter(CollectUserAgentFilter.java:69)",
    "java.lang.Thread.run(Thread.java:745)"
  ],
  "errors": [
    {
      "code": "Neo.ClientError.Statement.ArgumentError",
      "message": "Could not set property \"foo\", unsupported type: null"
    }
  ]
}
```

Property values can not be nested

Nesting properties is not supported. You could for example store the nested JSON as a string instead.

Example request

- **POST** http://localhost:7474/db/data/node/
- **Accept:** application/json; charset=UTF-8
- **Content-Type:** application/json

```
{
  "foo" : {
    "bar" : "baz"
  }
}
```

Example response

- **400:** Bad Request
- **Content-Type:** application/json; charset=UTF-8

```

{
  "message": "Could not set property \"foo\", unsupported type: {bar\u003dbaz}",
  "exception": "PropertyValueException",
  "fullname": "org.neo4j.server.rest.web.PropertyValueException",
  "stackTrace": [
    "org.neo4j.server.rest.domain.PropertySettingStrategy.setProperty(PropertySettingStrategy.java:141)",
    "org.neo4j.server.rest.domain.PropertySettingStrategy.setProperties(PropertySettingStrategy.java:88)",
    "org.neo4j.server.rest.web.DatabaseActions.createNode(DatabaseActions.java:197)",
    "org.neo4j.server.rest.web.RestfulGraphDatabase.createNode(RestfulGraphDatabase.java:252)",
    "java.lang.reflect.Method.invoke(Method.java:497)",
    "org.neo4j.server.rest.transactional.TransactionalRequestDispatcher.dispatch(TransactionalRequestDispatche
r.java:144)",
    "org.neo4j.server.rest.web.CollectUserAgentFilter.doFilter(CollectUserAgentFilter.java:69)",
    "java.lang.Thread.run(Thread.java:745)"
  ],
  "errors": [
    {
      "code": "Neo.ClientError.Statement.ArgumentError",
      "message": "Could not set property \"foo\", unsupported type: {bar\u003dbaz}"
    }
  ]
}

```

Delete all properties from node




Figure 41. Starting Graph



Figure 42. Final Graph

Example request

- **DELETE** <http://localhost:7474/db/data/node/2/properties>
- **Accept:** application/json; charset=UTF-8

Example response

- **204:** No Content

Delete a named property from a node

To delete a single property from a node, see the example below




Figure 43. Starting Graph





Figure 44. Final Graph

Example request

- **DELETE** http://localhost:7474/db/data/node/1/properties/name
- **Accept:** application/json; charset=UTF-8

Example response

- **204:** No Content



Relationship properties

Update relationship properties




Figure 45. Starting Graph




Figure 46. Final Graph

Example request

- **PUT** <http://localhost:7474/db/data/relationship/66/properties>
- **Accept:** application/json; charset=UTF-8
- **Content-Type:** application/json

```
{  
  "jim" : "tobias"  
}
```

Example response

- **204:** No Content

Remove properties from a relationship




Figure 47. Starting Graph




Figure 48. Final Graph

Example request

- **DELETE** `http://localhost:7474/db/data/relationship/37/properties`
- **Accept:** `application/json; charset=UTF-8`

Example response

- **204:** No Content

Remove property from a relationship

See the example request below.




Figure 49. Starting Graph




Figure 50. Final Graph

Example request

- **DELETE** `http://localhost:7474/db/data/relationship/40/properties/cost`
- **Accept:** `application/json; charset=UTF-8`

Example response

- **204:** No Content

Remove non-existent property from a relationship

Attempting to remove a property that doesn't exist results in an error.




Figure 51. Starting Graph

Example request

- **DELETE** `http://localhost:7474/db/data/relationship/38/properties/non-existent`
- **Accept:** `application/json; charset=UTF-8`

Example response

- **404:** Not Found
- **Content-Type:** `application/json; charset=UTF-8`

```
{
  "message": "(54)-[LOVES,38]-\u003e(55) does not have a property \"non-existent\"",
  "exception": "NoSuchPropertyException",
  "fullName": "org.neo4j.server.rest.web.NoSuchPropertyException",
  "stackTrace": [
    "org.neo4j.server.rest.web.DatabaseActions.removeRelationshipProperty(DatabaseActions.java:663)",
    "org.neo4j.server.rest.web.RestfulGraphDatabase.deleteRelationshipProperty(RestfulGraphDatabase.java:812)",
    "java.lang.reflect.Method.invoke(Method.java:497)",
    "org.neo4j.server.rest.transactional.TransactionalRequestDispatcher.dispatch(TransactionalRequestDispatche
r.java:144)",
    "org.neo4j.server.rest.web CollectUserAgentFilter.doFilter(CollectUserAgentFilter.java:69)",
    "java.lang.Thread.run(Thread.java:745)"
  ],
  "errors": [
    {
      "code": "Neo.ClientError.Statement.PropertyNotFound",
      "message": "(54)-[LOVES,38]-\u003e(55) does not have a property \"non-existent\""
    }
  ]
}
```

Remove properties from a non-existing relationship

Attempting to remove all properties from a relationship which doesn't exist results in an error.

Example request

- **DELETE** `http://localhost:7474/db/data/relationship/1234/properties`
- **Accept:** `application/json; charset=UTF-8`

Example response

- **404:** Not Found
- **Content-Type:** `application/json; charset=UTF-8`

```

{
  "message": "org.neo4j.graphdb.NotFoundException: Relationship 1234 not found",
  "exception": "RelationshipNotFoundException",
  "fullname": "org.neo4j.server.rest.web.RelationshipNotFoundException",
  "stackTrace": [
    "org.neo4j.server.rest.web.DatabaseActions.relationship(DatabaseActions.java:180)",
    "org.neo4j.server.rest.web.DatabaseActions.removeAllRelationshipProperties(DatabaseActions.java:653)",
    "org.neo4j.server.rest.web.RestfulGraphDatabase.deleteAllRelationshipProperties(RestfulGraphDatabase.java:792)",
    "java.lang.reflect.Method.invoke(Method.java:497)",
    "org.neo4j.server.rest.transactional.TransactionalRequestDispatcher.dispatch(TransactionalRequestDispatcher.java:144)",
    "org.neo4j.server.rest.web.CollectUserAgentFilter.doFilter(CollectUserAgentFilter.java:69)",
    "java.lang.Thread.run(Thread.java:745)"
  ],
  "cause": {
    "exception": "NotFoundException",
    "cause": {
      "exception": "EntityNotFoundException",
      "fullname": "org.neo4j.kernel.api.exceptions.EntityNotFoundException",
      "stackTrace": [
        "org.neo4j.kernel.impl.api.store.DiskLayer.relationshipVisit(DiskLayer.java:432)",
        "org.neo4j.kernel.impl.api.store.CacheLayer.relationshipVisit(CacheLayer.java:345)",
        "org.neo4j.kernel.impl.api.StateHandlingStatementOperations.relationshipVisit(StateHandlingStatementOperations.java:1417)",
        "org.neo4j.kernel.impl.api.ConstraintEnforcingEntityOperations.relationshipVisit(ConstraintEnforcingEntityOperations.java:416)",
        "org.neo4j.kernel.impl.api.OperationsFacade.relationshipVisit(OperationsFacade.java:493)",
        "org.neo4j.kernel.impl.factory.GraphDatabaseFacade.getRelationshipById(GraphDatabaseFacade.java:292)",
        "org.neo4j.server.rest.web.DatabaseActions.relationship(DatabaseActions.java:176)",
        "org.neo4j.server.rest.web.DatabaseActions.removeAllRelationshipProperties(DatabaseActions.java:653)",
        "org.neo4j.server.rest.web.RestfulGraphDatabase.deleteAllRelationshipProperties(RestfulGraphDatabase.java:792)",
        "java.lang.reflect.Method.invoke(Method.java:497)",
        "org.neo4j.server.rest.transactional.TransactionalRequestDispatcher.dispatch(TransactionalRequestDispatcher.java:144)",
        "org.neo4j.server.rest.web.CollectUserAgentFilter.doFilter(CollectUserAgentFilter.java:69)",
        "java.lang.Thread.run(Thread.java:745)"
      ],
      "message": "Unable to load RELATIONSHIP with id 1234.",
      "errors": [
        {
          "code": "Neo.ClientError.Statement.EntityNotFound",
          "message": "Unable to load RELATIONSHIP with id 1234."
        }
      ]
    }
  },
  "fullname": "org.neo4j.graphdb.NotFoundException",
  "stackTrace": [
    "org.neo4j.kernel.impl.factory.GraphDatabaseFacade.getRelationshipById(GraphDatabaseFacade.java:297)",
    "org.neo4j.server.rest.web.DatabaseActions.relationship(DatabaseActions.java:176)",
    "org.neo4j.server.rest.web.DatabaseActions.removeAllRelationshipProperties(DatabaseActions.java:653)",
    "org.neo4j.server.rest.web.RestfulGraphDatabase.deleteAllRelationshipProperties(RestfulGraphDatabase.java:792)",
    "java.lang.reflect.Method.invoke(Method.java:497)",
    "org.neo4j.server.rest.transactional.TransactionalRequestDispatcher.dispatch(TransactionalRequestDispatcher.java:144)",
    "org.neo4j.server.rest.web.CollectUserAgentFilter.doFilter(CollectUserAgentFilter.java:69)",
    "java.lang.Thread.run(Thread.java:745)"
  ],
  "message": "Relationship 1234 not found",
  "errors": [
    {
      "code": "Neo.ClientError.Statement.EntityNotFound",
      "message": "Relationship 1234 not found"
    }
  ]
}

```

```

},
"errors": [
  {
    "code": "Neo.ClientError.Statement.EntityNotFound",
    "message": "org.neo4j.graphdb.NotFoundException: Relationship 1234 not found"
  }
]
}

```

Remove property from a non-existing relationship

Attempting to remove a property from a relationship which doesn't exist results in an error.

Example request

- **DELETE** http://localhost:7474/db/data/relationship/1234/properties/cost
- **Accept:** application/json; charset=UTF-8

Example response

- **404:** Not Found
- **Content-Type:** application/json; charset=UTF-8

```

{
  "message": "org.neo4j.graphdb.NotFoundException: Relationship 1234 not found",
  "exception": "RelationshipNotFoundException",
  "fullname": "org.neo4j.server.rest.web.RelationshipNotFoundException",
  "stackTrace": [
    "org.neo4j.server.rest.web.DatabaseActions.relationship(DatabaseActions.java:180)",
    "org.neo4j.server.rest.web.DatabaseActions.removeRelationshipProperty(DatabaseActions.java:659)",
    "org.neo4j.server.rest.web.RestfulGraphDatabase.deleteRelationshipProperty(RestfulGraphDatabase.java:812)",
    "java.lang.reflect.Method.invoke(Method.java:497)",
    "org.neo4j.server.rest.transactional.TransactionalRequestDispatcher.dispatch(TransactionalRequestDispatcher.java:144)",
    "org.neo4j.server.rest.web.CollectUserAgentFilter.doFilter(CollectUserAgentFilter.java:69)",
    "java.lang.Thread.run(Thread.java:745)"
  ],
  "cause": {
    "exception": "NotFoundException",
    "cause": {
      "exception": "EntityNotFoundException",
      "fullname": "org.neo4j.kernel.api.exceptions.EntityNotFoundException",
      "stackTrace": [
        "org.neo4j.kernel.impl.api.store.DiskLayer.relationshipVisit(DiskLayer.java:432)",
        "org.neo4j.kernel.impl.api.store.CacheLayer.relationshipVisit(CacheLayer.java:345)",
        "org.neo4j.kernel.impl.api.StateHandlingStatementOperations.relationshipVisit(StateHandlingStatementOperations.java:1417)",
        "org.neo4j.kernel.impl.api.ConstraintEnforcingEntityOperations.relationshipVisit(ConstraintEnforcingEntityOperations.java:416)",
        "org.neo4j.kernel.impl.api.OperationsFacade.relationshipVisit(OperationsFacade.java:493)",
        "org.neo4j.kernel.impl.factory.GraphDatabaseFacade.getRelationshipById(GraphDatabaseFacade.java:292)",
        "org.neo4j.server.rest.web.DatabaseActions.relationship(DatabaseActions.java:176)",
        "org.neo4j.server.rest.web.DatabaseActions.removeRelationshipProperty(DatabaseActions.java:659)",
        "org.neo4j.server.rest.web.RestfulGraphDatabase.deleteRelationshipProperty(RestfulGraphDatabase.java:812)",
        "java.lang.reflect.Method.invoke(Method.java:497)",
        "org.neo4j.server.rest.transactional.TransactionalRequestDispatcher.dispatch(TransactionalRequestDispatcher.java:144)",
        "org.neo4j.server.rest.web.CollectUserAgentFilter.doFilter(CollectUserAgentFilter.java:69)",
        "java.lang.Thread.run(Thread.java:745)"
      ],
      "message": "Unable to load RELATIONSHIP with id 1234.",
      "errors": [

```



```

    {
      "code": "Neo.ClientError.Statement.EntityNotFound",
      "message": "Unable to load RELATIONSHIP with id 1234."
    }
  ],
  "fullname": "org.neo4j.graphdb.NotFoundException",
  "stackTrace": [
    "org.neo4j.kernel.impl.factory.GraphDatabaseFacade.getRelationshipById(GraphDatabaseFacade.java:297)",
    "org.neo4j.server.rest.web.DatabaseActions.relationship(DatabaseActions.java:176)",
    "org.neo4j.server.rest.web.DatabaseActions.removeRelationshipProperty(DatabaseActions.java:659)",
    "org.neo4j.server.rest.web.RestfulGraphDatabase.deleteRelationshipProperty(RestfulGraphDatabase.java:812)"
  ],
  "java.lang.reflect.Method.invoke(Method.java:497)",
  "org.neo4j.server.rest.transactional.TransactionalRequestDispatcher.dispatch(TransactionalRequestDispatcher.java:144)",
  "org.neo4j.server.rest.web.CollectUserAgentFilter.doFilter(CollectUserAgentFilter.java:69)",
  "java.lang.Thread.run(Thread.java:745)"
],
"message": "Relationship 1234 not found",
"errors": [
  {
    "code": "Neo.ClientError.Statement.EntityNotFound",
    "message": "Relationship 1234 not found"
  }
]
},
"errors": [
  {
    "code": "Neo.ClientError.Statement.EntityNotFound",
    "message": "org.neo4j.graphdb.NotFoundException: Relationship 1234 not found"
  }
]
}

```

Node labels

Adding a label to a node




Figure 52. Starting Graph




Figure 53. Final Graph

Example request

- **POST** `http://localhost:7474/db/data/node/23/labels`
- **Accept:** `application/json; charset=UTF-8`
- **Content-Type:** `application/json`

```
"Person"
```

Example response

- **204:** No Content

Adding multiple labels to a node




Figure 54. Starting Graph




Figure 55. Final Graph

Example request

- **POST** `http://localhost:7474/db/data/node/34/labels`
- **Accept:** `application/json; charset=UTF-8`
- **Content-Type:** `application/json`

```
[ "Person", "Actor" ]
```

Example response

- **204:** No Content

Adding a label with an invalid name

Labels with empty names are not allowed, however, all other valid strings are accepted as label names. Adding an invalid label to a node will lead to a HTTP 400 response.

Example request

- **POST** http://localhost:7474/db/data/node/41/labels
- **Accept:** application/json; charset=UTF-8
- **Content-Type:** application/json

""

Example response

- **400:** Bad Request
- **Content-Type:** application/json; charset=UTF-8

```

{
  "message": "Unable to add label, see nested exception.",
  "exception": "BadInputException",
  "fullname": "org.neo4j.server.rest.repr.BadInputException",
  "stackTrace": [
    "org.neo4j.server.rest.web.DatabaseActions.addLabelToNode(DatabaseActions.java:311)",
    "org.neo4j.server.rest.web.RestfulGraphDatabase.addNodeLabel(RestfulGraphDatabase.java:446)",
    "java.lang.reflect.Method.invoke(Method.java:497)",
    "org.neo4j.server.rest.transactional.TransactionalRequestDispatcher.dispatch(TransactionalRequestDispatcher.java:144)",
    "org.neo4j.server.rest.web.CollectUserAgentFilter.doFilter(CollectUserAgentFilter.java:69)",
    "java.lang.Thread.run(Thread.java:745)"
  ],
  "cause": {
    "exception": "ConstraintViolationException",
    "cause": {
      "exception": "IllegalTokenNameException",
      "fullname": "org.neo4j.kernel.api.exceptions.schema.IllegalTokenNameException",
      "stackTrace": [
        "org.neo4j.kernel.impl.api.DataIntegrityValidatingStatementOperations.checkValidTokenName(DataIntegrityValidatingStatementOperations.java:255)",
        "org.neo4j.kernel.impl.api.DataIntegrityValidatingStatementOperations.labelGetOrCreateForName(DataIntegrityValidatingStatementOperations.java:88)",
        "org.neo4j.kernel.impl.api.OperationsFacade.labelGetOrCreateForName(OperationsFacade.java:874)",
        "org.neo4j.kernel.impl.core.NodeProxy.addLabel(NodeProxy.java:582)",
        "org.neo4j.server.rest.web.DatabaseActions.addLabelToNode(DatabaseActions.java:306)",
        "org.neo4j.server.rest.web.RestfulGraphDatabase.addNodeLabel(RestfulGraphDatabase.java:446)",
        "java.lang.reflect.Method.invoke(Method.java:497)",
        "org.neo4j.server.rest.transactional.TransactionalRequestDispatcher.dispatch(TransactionalRequestDispatcher.java:144)",
        "org.neo4j.server.rest.web.CollectUserAgentFilter.doFilter(CollectUserAgentFilter.java:69)",
        "java.lang.Thread.run(Thread.java:745)"
      ],
      "message": "\u0027\u0027 is not a valid token name. Only non-null, non-empty strings are allowed.",
      "errors": [
        {
          "code": "Neo.ClientError.Schema.TokenNameError",
          "message": "\u0027\u0027 is not a valid token name. Only non-null, non-empty strings are allowed."
        }
      ]
    }
  },
  "fullname": "org.neo4j.graphdb.ConstraintViolationException",
  "stackTrace": [
    "org.neo4j.kernel.impl.core.NodeProxy.addLabel(NodeProxy.java:592)",
    "org.neo4j.server.rest.web.DatabaseActions.addLabelToNode(DatabaseActions.java:306)",
    "org.neo4j.server.rest.web.RestfulGraphDatabase.addNodeLabel(RestfulGraphDatabase.java:446)",
    "java.lang.reflect.Method.invoke(Method.java:497)",
    "org.neo4j.server.rest.transactional.TransactionalRequestDispatcher.dispatch(TransactionalRequestDispatcher.java:144)",
    "org.neo4j.server.rest.web.CollectUserAgentFilter.doFilter(CollectUserAgentFilter.java:69)",
    "java.lang.Thread.run(Thread.java:745)"
  ],
  "message": "Invalid label name \u0027\u0027.",
  "errors": [
    {
      "code": "Neo.ClientError.Schema.ConstraintValidationFailed",
      "message": "Invalid label name \u0027\u0027."
    }
  ]
},
"errors": [
  {
    "code": "Neo.ClientError.Request.InvalidFormat",
    "message": "Unable to add label, see nested exception."
  }
]
}

```

Replacing labels on a node

This removes any labels currently on a node, and replaces them with the labels passed in as the request body.




Figure 56. Starting Graph




Figure 57. Final Graph

Example request

- **PUT** `http://localhost:7474/db/data/node/24/labels`
- **Accept:** `application/json; charset=UTF-8`
- **Content-Type:** `application/json`

```
[ "Actor", "Director" ]
```

Example response

- **204:** No Content

Removing a label from a node




Figure 58. Starting Graph




Figure 59. Final Graph

Example request

- **DELETE** `http://localhost:7474/db/data/node/25/labels/Person`
- **Accept:** `application/json; charset=UTF-8`

Example response

- **204:** No Content

Removing a non-existent label from a node




Figure 60. Starting Graph





Figure 61. Final Graph

Example request

- **DELETE** `http://localhost:7474/db/data/node/26/labels/Person`
- **Accept:** `application/json; charset=UTF-8`

Example response

- **204:** No Content



Listing labels for a node





Figure 62. Final Graph

Example request

- **GET** `http://localhost:7474/db/data/node/30/labels`
- **Accept:** `application/json; charset=UTF-8`

Example response

- **200:** OK
- **Content-Type:** `application/json; charset=UTF-8`



Get all nodes with a label






Figure 63. Final Graph

Example request

- **GET** `http://localhost:7474/db/data/label/Actor/nodes`
- **Accept:** `application/json; charset=UTF-8`

Example response

- **200:** OK
- **Content-Type:** application/json; charset=UTF-8

```
[ {
  "metadata" : {
    "id" : 35,
    "labels" : [ "Actor" ]
  },
  "data" : {
    "name" : "Donald Sutherland"
  },
  "paged_traverse" :
"http://localhost:7474/db/data/node/35/paged/traverse/{returnType}{?pageSize,leaseTime}",
  "outgoing_relationships" : "http://localhost:7474/db/data/node/35/relationships/out",
  "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/35/relationships/out/{-list|&|types}",
  "create_relationship" : "http://localhost:7474/db/data/node/35/relationships",
  "labels" : "http://localhost:7474/db/data/node/35/labels",
  "traverse" : "http://localhost:7474/db/data/node/35/traverse/{returnType}",
  "extensions" : { },
  "all_relationships" : "http://localhost:7474/db/data/node/35/relationships/all",
  "all_typed_relationships" : "http://localhost:7474/db/data/node/35/relationships/all/{-list|&|types}",
  "property" : "http://localhost:7474/db/data/node/35/properties/{key}",
  "self" : "http://localhost:7474/db/data/node/35",
  "incoming_relationships" : "http://localhost:7474/db/data/node/35/relationships/in",
  "properties" : "http://localhost:7474/db/data/node/35/properties",
  "incoming_typed_relationships" : "http://localhost:7474/db/data/node/35/relationships/in/{-list|&|types}"
}, {
  "metadata" : {
    "id" : 37,
    "labels" : [ "Actor", "Director" ]
  },
  "data" : {
    "name" : "Clint Eastwood"
  },
  "paged_traverse" :
"http://localhost:7474/db/data/node/37/paged/traverse/{returnType}{?pageSize,leaseTime}",
  "outgoing_relationships" : "http://localhost:7474/db/data/node/37/relationships/out",
  "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/37/relationships/out/{-list|&|types}",
  "create_relationship" : "http://localhost:7474/db/data/node/37/relationships",
  "labels" : "http://localhost:7474/db/data/node/37/labels",
  "traverse" : "http://localhost:7474/db/data/node/37/traverse/{returnType}",
  "extensions" : { },
  "all_relationships" : "http://localhost:7474/db/data/node/37/relationships/all",
  "all_typed_relationships" : "http://localhost:7474/db/data/node/37/relationships/all/{-list|&|types}",
  "property" : "http://localhost:7474/db/data/node/37/properties/{key}",
  "self" : "http://localhost:7474/db/data/node/37",
  "incoming_relationships" : "http://localhost:7474/db/data/node/37/relationships/in",
  "properties" : "http://localhost:7474/db/data/node/37/properties",
  "incoming_typed_relationships" : "http://localhost:7474/db/data/node/37/relationships/in/{-list|&|types}"
} ]
```

Get nodes by label and property

You can retrieve all nodes with a given label and property by passing one property as a query parameter. Notice that the property value is JSON-encoded and then URL-encoded.

If there is an index available on the label/property combination you send, that index will be used. If no index is available, all nodes with the given label will be filtered through to find matching nodes.

Currently, it is not possible to search using multiple properties.




Figure 64. Final Graph

Example request

- **GET** `http://localhost:7474/db/data/label/Person/nodes?name=%22Clint+Eastwood%22`
- **Accept:** `application/json; charset=UTF-8`

Example response

- **200:** OK
- **Content-Type:** `application/json; charset=UTF-8`

```
[ {
  "metadata" : {
    "id" : 40,
    "labels" : [ "Person" ]
  },
  "data" : {
    "name" : "Clint Eastwood"
  },
  "paged_traverse" :
"http://localhost:7474/db/data/node/40/paged/traverse/{returnType}{?pageSize,leaseTime}",
  "outgoing_relationships" : "http://localhost:7474/db/data/node/40/relationships/out",
  "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/40/relationships/out/{-list|&|types}",
  "create_relationship" : "http://localhost:7474/db/data/node/40/relationships",
  "labels" : "http://localhost:7474/db/data/node/40/labels",
  "traverse" : "http://localhost:7474/db/data/node/40/traverse/{returnType}",
  "extensions" : { },
  "all_relationships" : "http://localhost:7474/db/data/node/40/relationships/all",
  "all_typed_relationships" : "http://localhost:7474/db/data/node/40/relationships/all/{-list|&|types}",
  "property" : "http://localhost:7474/db/data/node/40/properties/{key}",
  "self" : "http://localhost:7474/db/data/node/40",
  "incoming_relationships" : "http://localhost:7474/db/data/node/40/relationships/in",
  "properties" : "http://localhost:7474/db/data/node/40/properties",
  "incoming_typed_relationships" : "http://localhost:7474/db/data/node/40/relationships/in/{-list|&|types}"
} ]
```

List all labels

By default, the server will return labels in use only. If you also want to return labels not in use, append the `"in_use=0"` query parameter.

Example request

- **GET** `http://localhost:7474/db/data/labels`
- **Accept:** `application/json; charset=UTF-8`

Example response

- **200:** OK
- **Content-Type:** `application/json; charset=UTF-8`

```
[ "Director", "Person", "Actor" ]
```


Node degree

The node degree is the number of relationships associated with a node. Neo4j stores the degree for each node, making this a useful mechanism to quickly get the number of relationships a node has. You can also optionally filter degree by direction and/or relationship type.

Get the degree of a node

Return the total number of relationships associated with a node.

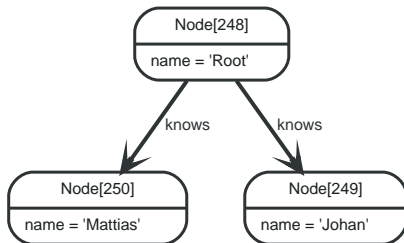


Figure 65. Final Graph

Example request

- **GET** `http://localhost:7474/db/data/node/248/degree/all`
- **Accept:** `application/json; charset=UTF-8`

Example response

- **200:** OK
- **Content-Type:** `application/json; charset=UTF-8`

2

Get the degree of a node by direction

Return the number of relationships of a particular direction for a node. Specify **all**, **in** or **out**.

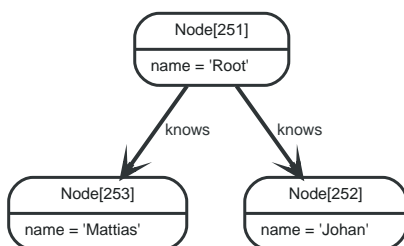


Figure 66. Final Graph

Example request

- **GET** `http://localhost:7474/db/data/node/251/degree/out`
- **Accept:** `application/json; charset=UTF-8`

Example response

- **200:** OK
- **Content-Type:** `application/json; charset=UTF-8`

Get the degree of a node by direction and types

If you are only interested in the degree of a particular relationship type, or a set of relationship types, you specify relationship types after the direction. You can combine multiple relationship types by using the & character.

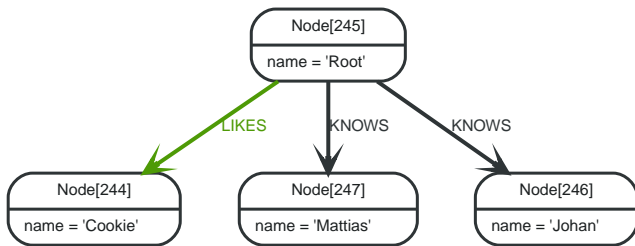


Figure 67. Final Graph

Example request

- **GET** `http://localhost:7474/db/data/node/245/degree/out/KNOWS&LIKES`
- **Accept:** `application/json; charset=UTF-8`

Example response

- **200:** OK
- **Content-Type:** `application/json; charset=UTF-8`

Indexing



This documents schema based indexes, a feature that was introduced in Neo4j 2.0, see [Legacy indexing](#) for legacy indexing.

For more details about indexes and the optional schema in Neo4j, see [\[graphdb-neo4j-schema\]](#).

Create index

This will start a background job in the database that will create and populate the index. You can check the status of your index by listing all the indexes for the relevant label.

Example request

- **POST** http://localhost:7474/db/data/schema/index/label_1462496438386_1
- **Accept:** application/json; charset=UTF-8
- **Content-Type:** application/json

```
{
  "property_keys" : [ "property_1462496438386_1" ]
}
```

Example response

- **200:** OK
- **Content-Type:** application/json; charset=UTF-8

```
{
  "label" : "label_1462496438386_1",
  "property_keys" : [ "property_1462496438386_1" ]
}
```

List indexes for a label

Example request

- **GET** http://localhost:7474/db/data/schema/index/label_1462496438144_1
- **Accept:** application/json; charset=UTF-8

Example response

- **200:** OK
- **Content-Type:** application/json; charset=UTF-8

```
[ {
  "property_keys" : [ "property_1462496438144_1" ],
  "label" : "label_1462496438144_1"
} ]
```

Drop index


Drop index

Example request

- **DELETE**
http://localhost:7474/db/data/schema/index/label_1462496438313_1/property_1462496438313_1
- **Accept:** application/json; charset=UTF-8

Example response

- **204:** No Content



Constraints

Create uniqueness constraint

Create a uniqueness constraint on a property.

Example request

- **POST** http://localhost:7474/db/data/schema/constraint/label_1462496401033_1/uniqueness/
- **Accept:** application/json; charset=UTF-8
- **Content-Type:** application/json

```
{  
  "property_keys" : [ "property_1462496401033_1" ]  
}
```

Example response

- **200:** OK
- **Content-Type:** application/json; charset=UTF-8

```
{  
  "label" : "label_1462496401033_1",  
  "type" : "UNIQUENESS",  
  "property_keys" : [ "property_1462496401033_1" ]  
}
```

Get a specific uniqueness constraint

Get a specific uniqueness constraint for a label and a property.

Example request

- **GET**
http://localhost:7474/db/data/schema/constraint/label_1462496401514_1/uniqueness/property_1462496401514_1
- **Accept:** application/json; charset=UTF-8

Example response

- **200:** OK
- **Content-Type:** application/json; charset=UTF-8

```
[ {  
  "property_keys" : [ "property_1462496401514_1" ],  
  "label" : "label_1462496401514_1",  
  "type" : "UNIQUENESS"  
} ]
```

Get all uniqueness constraints for a label

Example request

- **GET** http://localhost:7474/db/data/schema/constraint/label_1462496401410_1/uniqueness/
- **Accept:** application/json; charset=UTF-8

Example response

- **200:** OK
- **Content-Type:** application/json; charset=UTF-8

```
[ {
  "property_keys" : [ "property_1462496401410_2" ],
  "label" : "label_1462496401410_1",
  "type" : "UNIQUENESS"
}, {
  "property_keys" : [ "property_1462496401410_1" ],
  "label" : "label_1462496401410_1",
  "type" : "UNIQUENESS"
} ]
```

Drop uniqueness constraint

Drop uniqueness constraint for a label and a property.

Example request

- **DELETE**
http://localhost:7474/db/data/schema/constraint/label_1462496400907_1/uniqueness/property_1462496400907_1
- **Accept:** application/json; charset=UTF-8

Example response

- **204:** No Content

Get a specific node property existence constraint

Get a specific node property existence constraint for a label and a property.

Example request

- **GET**
http://localhost:7474/db/data/schema/constraint/label_1462500007563_1/existence/property_1462500007563_1
- **Accept:** application/json; charset=UTF-8

Example response

- **200:** OK
- **Content-Type:** application/json; charset=UTF-8

```
[ {
  "property_keys" : [ "property_1462500007563_1" ],
  "label" : "label_1462500007563_1",
  "type" : "NODE_PROPERTY_EXISTENCE"
} ]
```

Get all node property existence constraints for a label

Example request

- **GET** http://localhost:7474/db/data/schema/constraint/label_1462500007659_1/existence/
- **Accept:** application/json; charset=UTF-8

Example response

- **200:** OK
- **Content-Type:** application/json; charset=UTF-8

```
[ {
  "property_keys" : [ "property_1462500007659_2" ],
  "label" : "label_1462500007659_1",
  "type" : "NODE_PROPERTY_EXISTENCE"
}, {
  "property_keys" : [ "property_1462500007659_1" ],
  "label" : "label_1462500007659_1",
  "type" : "NODE_PROPERTY_EXISTENCE"
} ]
```

Get all constraints for a label

Example request

- **GET** http://localhost:7474/db/data/schema/constraint/label_1462496401297_1
- **Accept:** application/json; charset=UTF-8

Example response

- **200:** OK
- **Content-Type:** application/json; charset=UTF-8

```
[ {
  "property_keys" : [ "property_1462496401297_1" ],
  "label" : "label_1462496401297_1",
  "type" : "UNIQUENESS"
} ]
```

Get a specific relationship property existence constraint

Get a specific relationship property existence constraint for a label and a property.

Example request

- **GET**
http://localhost:7474/db/data/schema/relationship/constraint/relationshipType_1462500005360_1/existence/property_1462500005360_1
- **Accept:** application/json; charset=UTF-8

Example response

- **200:** OK
- **Content-Type:** application/json; charset=UTF-8

```
[ {
  "relationshipType" : "relationshipType_1462500005360_1",
  "property_keys" : [ "property_1462500005360_1" ],
  "type" : "RELATIONSHIP_PROPERTY_EXISTENCE"
} ]
```

Get all relationship property existence constraints for a type

Example request

- **GET**
`http://localhost:7474/db/data/schema/relationship/constraint/relationshipType_1462500007400_1/existence/`
- **Accept:** application/json; charset=UTF-8

Example response

- **200:** OK
- **Content-Type:** application/json; charset=UTF-8

```
[ {
  "relationshipType" : "relationshipType_1462500007400_1",
  "property_keys" : [ "property_1462500007400_2" ],
  "type" : "RELATIONSHIP_PROPERTY_EXISTENCE"
}, {
  "relationshipType" : "relationshipType_1462500007400_1",
  "property_keys" : [ "property_1462500007400_1" ],
  "type" : "RELATIONSHIP_PROPERTY_EXISTENCE"
} ]
```

Get all constraints

Example request

- **GET** `http://localhost:7474/db/data/schema/constraint`
- **Accept:** application/json; charset=UTF-8

Example response

- **200:** OK
- **Content-Type:** application/json; charset=UTF-8

```
[ {
  "property_keys" : [ "property_1462496401033_1" ],
  "label" : "label_1462496401033_1",
  "type" : "UNIQUENESS"
}, {
  "property_keys" : [ "property_1462496401083_1" ],
  "label" : "label_1462496401083_1",
  "type" : "UNIQUENESS"
} ]
```


Traversals



The Traversal REST Endpoint executes arbitrary Javascript code under the hood as part of the evaluators definitions. In hosted and open environments, this can constitute a security risk. In these case, consider using declarative approaches like [\[cypher-query-lang\]](#) or write your own server side plugin executing the interesting traversals with the Java API (see [\[server-plugins\]](#)) or secure your server, see [\[operations-security\]](#).

Traversals are performed from a start node. The traversal is controlled by the URI and the body sent with the request.

returnType

The kind of objects in the response is determined by 'traverse/{returnType}' in the URL. returnType can have one of these values:

- node
- relationship
- path: contains full representations of start and end node, the rest are URIs.
- fullpath: contains full representations of all nodes and relationships.

To decide how the graph should be traversed you can use these parameters in the request body:

order

Decides in which order to visit nodes. Possible values:

- breadth_first: see [Breadth-first search](http://en.wikipedia.org/wiki/Breadth-first_search) (http://en.wikipedia.org/wiki/Breadth-first_search).
- depth_first: see [Depth-first search](http://en.wikipedia.org/wiki/Depth-first_search) (http://en.wikipedia.org/wiki/Depth-first_search)

relationships

Decides which relationship types and directions should be followed. The direction can be one of:

- all
- in
- out

uniqueness

Decides how uniqueness should be calculated. For details on different uniqueness values see the [Java API on Uniqueness](#) ([javadocs/org/neo4j/graphdb/traversal/Uniqueness.html](#)). Possible values:

- node_global
- none
- relationship_global
- node_path
- relationship_path

prune_evaluator

Decides whether the traverser should continue down that path or if it should be pruned so that the traverser won't continue down that path. You can write your own prune evaluator as (see [Traversal using a return filter](#) or use the built-in none prune evaluator.

return_filter

Decides whether the current position should be included in the result. You can provide your own code for this (see [Traversal using a return filter](#)), or use one of the built-in filters:

- all
- all_but_start_node

max_depth

Is a short-hand way of specifying a prune evaluator which prunes after a certain depth. If not specified a max depth of 1 is used and if a `prune_evaluator` is specified instead of a `max_depth`, no max depth limit is set.

The position object in the body of the `return_filter` and `prune_evaluator` is a `link:javadocs/org/neo4j/graphdb/Path.html[Path]` object representing the path from the start node to the current traversal position.

Out of the box, the REST API supports JavaScript code in filters and evaluators. The script body will be executed in a Java context which has access to the full Neo4j [Java API](#) (*javadocs/*). See the examples for the exact syntax of the request.

Traversal using a return filter

In this example, the `none` prune evaluator is used and a return filter is supplied in order to return all names containing "t". The result is to be returned as nodes and the max depth is set to 3.

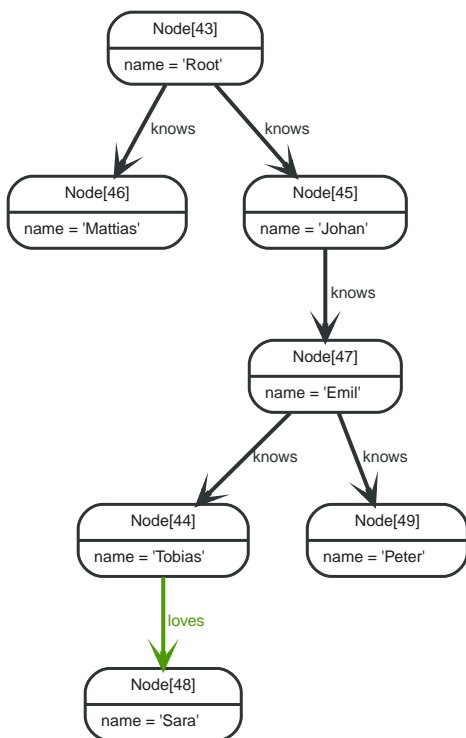


Figure 68. Final Graph

Example request

- **POST** `http://localhost:7474/db/data/node/43/traverse/node`
- **Accept:** `application/json; charset=UTF-8`
- **Content-Type:** `application/json`

```

{
  "relationships" : [ {
    "type" : "knows",
    "direction" : "all"
  }, {
    "type" : "loves",
    "direction" : "all"
  } ],
  "return_filter" : {
    "language" : "javascript",
    "body" : "position.endNode().getProperty('name').toLowerCase().contains('t')"
  },
  "uniqueness" : "node_global",
  "max_depth" : 3,
  "order" : "breadth_first",
  "prune_evaluator" : {
    "language" : "javascript",
    "body" : "position.length() > 10"
  }
}

```

Example response

- **200:** OK
- **Content-Type:** application/json; charset=UTF-8

```

[ {
  "metadata" : {
    "id" : 43,
    "labels" : [ ]
  },
  "data" : {
    "name" : "Root"
  },
  "paged_traverse" :
"http://localhost:7474/db/data/node/43/paged/traverse/{returnType}{?pageSize,leaseTime}",
  "outgoing_relationships" : "http://localhost:7474/db/data/node/43/relationships/out",
  "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/43/relationships/out/{-list|&|types}",
  "create_relationship" : "http://localhost:7474/db/data/node/43/relationships",
  "labels" : "http://localhost:7474/db/data/node/43/labels",
  "traverse" : "http://localhost:7474/db/data/node/43/traverse/{returnType}",
  "extensions" : { },
  "all_relationships" : "http://localhost:7474/db/data/node/43/relationships/all",
  "all_typed_relationships" : "http://localhost:7474/db/data/node/43/relationships/all/{-list|&|types}",
  "property" : "http://localhost:7474/db/data/node/43/properties/{key}",
  "self" : "http://localhost:7474/db/data/node/43",
  "incoming_relationships" : "http://localhost:7474/db/data/node/43/relationships/in",
  "properties" : "http://localhost:7474/db/data/node/43/properties",
  "incoming_typed_relationships" : "http://localhost:7474/db/data/node/43/relationships/in/{-list|&|types}"
}, {
  "metadata" : {
    "id" : 46,
    "labels" : [ ]
  },
  "data" : {
    "name" : "Mattias"
  },
  "paged_traverse" :
"http://localhost:7474/db/data/node/46/paged/traverse/{returnType}{?pageSize,leaseTime}",
  "outgoing_relationships" : "http://localhost:7474/db/data/node/46/relationships/out",
  "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/46/relationships/out/{-list|&|types}",
  "create_relationship" : "http://localhost:7474/db/data/node/46/relationships",
  "labels" : "http://localhost:7474/db/data/node/46/labels",
  "traverse" : "http://localhost:7474/db/data/node/46/traverse/{returnType}",
  "extensions" : { },
  "all_relationships" : "http://localhost:7474/db/data/node/46/relationships/all",
  "all_typed_relationships" : "http://localhost:7474/db/data/node/46/relationships/all/{-list|&|types}",
  "property" : "http://localhost:7474/db/data/node/46/properties/{key}",
  "self" : "http://localhost:7474/db/data/node/46",
  "incoming_relationships" : "http://localhost:7474/db/data/node/46/relationships/in",
  "properties" : "http://localhost:7474/db/data/node/46/properties",

```

```

    "incoming_typed_relationships" : "http://localhost:7474/db/data/node/46/relationships/in/{-list|&|types}"
  }, {
    "metadata" : {
      "id" : 49,
      "labels" : [ ]
    },
    "data" : {
      "name" : "Peter"
    },
    "paged_traverse" :
    "http://localhost:7474/db/data/node/49/paged/traverse/{returnType}{?pageSize,leaseTime}",
    "outgoing_relationships" : "http://localhost:7474/db/data/node/49/relationships/out",
    "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/49/relationships/out/{-list|&|types}",
    "create_relationship" : "http://localhost:7474/db/data/node/49/relationships",
    "labels" : "http://localhost:7474/db/data/node/49/labels",
    "traverse" : "http://localhost:7474/db/data/node/49/traverse/{returnType}",
    "extensions" : { },
    "all_relationships" : "http://localhost:7474/db/data/node/49/relationships/all",
    "all_typed_relationships" : "http://localhost:7474/db/data/node/49/relationships/all/{-list|&|types}",
    "property" : "http://localhost:7474/db/data/node/49/properties/{key}",
    "self" : "http://localhost:7474/db/data/node/49",
    "incoming_relationships" : "http://localhost:7474/db/data/node/49/relationships/in",
    "properties" : "http://localhost:7474/db/data/node/49/properties",
    "incoming_typed_relationships" : "http://localhost:7474/db/data/node/49/relationships/in/{-list|&|types}"
  }, {
    "metadata" : {
      "id" : 44,
      "labels" : [ ]
    },
    "data" : {
      "name" : "Tobias"
    },
    "paged_traverse" :
    "http://localhost:7474/db/data/node/44/paged/traverse/{returnType}{?pageSize,leaseTime}",
    "outgoing_relationships" : "http://localhost:7474/db/data/node/44/relationships/out",
    "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/44/relationships/out/{-list|&|types}",
    "create_relationship" : "http://localhost:7474/db/data/node/44/relationships",
    "labels" : "http://localhost:7474/db/data/node/44/labels",
    "traverse" : "http://localhost:7474/db/data/node/44/traverse/{returnType}",
    "extensions" : { },
    "all_relationships" : "http://localhost:7474/db/data/node/44/relationships/all",
    "all_typed_relationships" : "http://localhost:7474/db/data/node/44/relationships/all/{-list|&|types}",
    "property" : "http://localhost:7474/db/data/node/44/properties/{key}",
    "self" : "http://localhost:7474/db/data/node/44",
    "incoming_relationships" : "http://localhost:7474/db/data/node/44/relationships/in",
    "properties" : "http://localhost:7474/db/data/node/44/properties",
    "incoming_typed_relationships" : "http://localhost:7474/db/data/node/44/relationships/in/{-list|&|types}"
  } ]
} ]

```

Return relationships from a traversal




Figure 69. Final Graph

Example request

- **POST** `http://localhost:7474/db/data/node/39/traverse/relationship`
- **Accept:** `application/json; charset=UTF-8`
- **Content-Type:** `application/json`

```

{
  "order" : "breadth_first",
  "uniqueness" : "none",
  "return_filter" : {
    "language" : "builtin",
    "name" : "all"
  }
}

```

Example response

- **200:** OK
- **Content-Type:** application/json; charset=UTF-8

```

[ {
  "extensions" : { },
  "metadata" : {
    "id" : 28,
    "type" : "own"
  },
  "data" : { },
  "property" : "http://localhost:7474/db/data/relationship/28/properties/{key}",
  "start" : "http://localhost:7474/db/data/node/39",
  "self" : "http://localhost:7474/db/data/relationship/28",
  "end" : "http://localhost:7474/db/data/node/38",
  "type" : "own",
  "properties" : "http://localhost:7474/db/data/relationship/28/properties"
}, {
  "extensions" : { },
  "metadata" : {
    "id" : 27,
    "type" : "know"
  },
  "data" : { },
  "property" : "http://localhost:7474/db/data/relationship/27/properties/{key}",
  "start" : "http://localhost:7474/db/data/node/39",
  "self" : "http://localhost:7474/db/data/relationship/27",
  "end" : "http://localhost:7474/db/data/node/40",
  "type" : "know",
  "properties" : "http://localhost:7474/db/data/relationship/27/properties"
} ]

```

Return paths from a traversal




Figure 70. Final Graph

Example request

- **POST** http://localhost:7474/db/data/node/29/traverse/path
- **Accept:** application/json; charset=UTF-8
- **Content-Type:** application/json

```
{
  "order" : "breadth_first",
  "uniqueness" : "none",
  "return_filter" : {
    "language" : "builtin",
    "name" : "all"
  }
}
```

Example response

- **200:** OK
- **Content-Type:** application/json; charset=UTF-8

```
[ {
  "relationships" : [ ],
  "nodes" : [ "http://localhost:7474/db/data/node/29" ],
  "directions" : [ ],
  "start" : "http://localhost:7474/db/data/node/29",
  "length" : 0,
  "end" : "http://localhost:7474/db/data/node/29"
}, {
  "relationships" : [ "http://localhost:7474/db/data/relationship/20" ],
  "nodes" : [ "http://localhost:7474/db/data/node/29", "http://localhost:7474/db/data/node/28" ],
  "directions" : [ "->" ],
  "start" : "http://localhost:7474/db/data/node/29",
  "length" : 1,
  "end" : "http://localhost:7474/db/data/node/28"
}, {
  "relationships" : [ "http://localhost:7474/db/data/relationship/19" ],
  "nodes" : [ "http://localhost:7474/db/data/node/29", "http://localhost:7474/db/data/node/30" ],
  "directions" : [ "->" ],
  "start" : "http://localhost:7474/db/data/node/29",
  "length" : 1,
  "end" : "http://localhost:7474/db/data/node/30"
} ]
```

Traversal returning nodes below a certain depth

Here, all nodes at a traversal depth below 3 are returned.

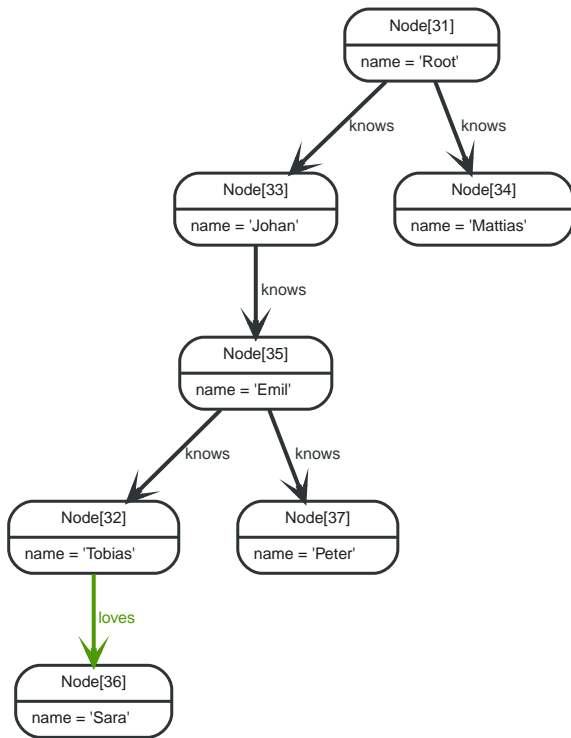


Figure 71. Final Graph

Example request

- **POST** http://localhost:7474/db/data/node/31/traverse/node
- **Accept:** application/json; charset=UTF-8
- **Content-Type:** application/json

```

{
  "return_filter" : {
    "language" : "javascript",
    "body" : "position.length()<3;"
  },
  "prune_evaluator" : {
    "name" : "none",
    "language" : "builtin"
  }
}

```

Example response

- **200:** OK
- **Content-Type:** application/json; charset=UTF-8

```

[ {
  "metadata" : {
    "id" : 31,
    "labels" : [ ]
  },
  "data" : {
    "name" : "Root"
  },
  "paged_traverse" :
"http://localhost:7474/db/data/node/31/paged/traverse/{returnType}{?pageSize,leaseTime}",
  "outgoing_relationships" : "http://localhost:7474/db/data/node/31/relationships/out",
  "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/31/relationships/out/{-list|&|types}",
  "create_relationship" : "http://localhost:7474/db/data/node/31/relationships",
  "labels" : "http://localhost:7474/db/data/node/31/labels",
  "traverse" : "http://localhost:7474/db/data/node/31/traverse/{returnType}",
  "extensions" : { },
} ]

```

```

    "all_relationships" : "http://localhost:7474/db/data/node/31/relationships/all",
    "all_typed_relationships" : "http://localhost:7474/db/data/node/31/relationships/all/{-list|&|types}",
    "property" : "http://localhost:7474/db/data/node/31/properties/{key}",
    "self" : "http://localhost:7474/db/data/node/31",
    "incoming_relationships" : "http://localhost:7474/db/data/node/31/relationships/in",
    "properties" : "http://localhost:7474/db/data/node/31/properties",
    "incoming_typed_relationships" : "http://localhost:7474/db/data/node/31/relationships/in/{-list|&|types}"
  }, {
    "metadata" : {
      "id" : 33,
      "labels" : [ ]
    },
    "data" : {
      "name" : "Johan"
    },
    "paged_traverse" :
    "http://localhost:7474/db/data/node/33/paged/traverse/{returnType}{?pageSize,leaseTime}",
    "outgoing_relationships" : "http://localhost:7474/db/data/node/33/relationships/out",
    "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/33/relationships/out/{-list|&|types}",
    "create_relationship" : "http://localhost:7474/db/data/node/33/relationships",
    "labels" : "http://localhost:7474/db/data/node/33/labels",
    "traverse" : "http://localhost:7474/db/data/node/33/traverse/{returnType}",
    "extensions" : { },
    "all_relationships" : "http://localhost:7474/db/data/node/33/relationships/all",
    "all_typed_relationships" : "http://localhost:7474/db/data/node/33/relationships/all/{-list|&|types}",
    "property" : "http://localhost:7474/db/data/node/33/properties/{key}",
    "self" : "http://localhost:7474/db/data/node/33",
    "incoming_relationships" : "http://localhost:7474/db/data/node/33/relationships/in",
    "properties" : "http://localhost:7474/db/data/node/33/properties",
    "incoming_typed_relationships" : "http://localhost:7474/db/data/node/33/relationships/in/{-list|&|types}"
  }, {
    "metadata" : {
      "id" : 35,
      "labels" : [ ]
    },
    "data" : {
      "name" : "Emil"
    },
    "paged_traverse" :
    "http://localhost:7474/db/data/node/35/paged/traverse/{returnType}{?pageSize,leaseTime}",
    "outgoing_relationships" : "http://localhost:7474/db/data/node/35/relationships/out",
    "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/35/relationships/out/{-list|&|types}",
    "create_relationship" : "http://localhost:7474/db/data/node/35/relationships",
    "labels" : "http://localhost:7474/db/data/node/35/labels",
    "traverse" : "http://localhost:7474/db/data/node/35/traverse/{returnType}",
    "extensions" : { },
    "all_relationships" : "http://localhost:7474/db/data/node/35/relationships/all",
    "all_typed_relationships" : "http://localhost:7474/db/data/node/35/relationships/all/{-list|&|types}",
    "property" : "http://localhost:7474/db/data/node/35/properties/{key}",
    "self" : "http://localhost:7474/db/data/node/35",
    "incoming_relationships" : "http://localhost:7474/db/data/node/35/relationships/in",
    "properties" : "http://localhost:7474/db/data/node/35/properties",
    "incoming_typed_relationships" : "http://localhost:7474/db/data/node/35/relationships/in/{-list|&|types}"
  }, {
    "metadata" : {
      "id" : 34,
      "labels" : [ ]
    },
    "data" : {
      "name" : "Mattias"
    },
    "paged_traverse" :
    "http://localhost:7474/db/data/node/34/paged/traverse/{returnType}{?pageSize,leaseTime}",
    "outgoing_relationships" : "http://localhost:7474/db/data/node/34/relationships/out",
    "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/34/relationships/out/{-list|&|types}",
    "create_relationship" : "http://localhost:7474/db/data/node/34/relationships",
    "labels" : "http://localhost:7474/db/data/node/34/labels",
    "traverse" : "http://localhost:7474/db/data/node/34/traverse/{returnType}",
    "extensions" : { },
    "all_relationships" : "http://localhost:7474/db/data/node/34/relationships/all",
    "all_typed_relationships" : "http://localhost:7474/db/data/node/34/relationships/all/{-list|&|types}",
    "property" : "http://localhost:7474/db/data/node/34/properties/{key}",
    "self" : "http://localhost:7474/db/data/node/34",
    "incoming_relationships" : "http://localhost:7474/db/data/node/34/relationships/in",

```



```
"properties" : "http://localhost:7474/db/data/node/34/properties",
"incoming_typed_relationships" : "http://localhost:7474/db/data/node/34/relationships/in/{-list|&|types}"
} ]
```

Creating a paged traverser

Paged traversers are created by POST-ing a traversal description to the link identified by the `paged_traverser` key in a node representation. When creating a paged traverser, the same options apply as for a regular traverser, meaning that `node`, `path`, or `fullpath`, can be targeted.

Example request

- **POST** `http://localhost:7474/db/data/node/297/paged/traverse/node`
- **Accept:** `application/json; charset=UTF-8`
- **Content-Type:** `application/json`

```
{
  "prune_evaluator" : {
    "language" : "builtin",
    "name" : "none"
  },
  "return_filter" : {
    "language" : "javascript",
    "body" : "position.endNode().getProperty('name').contains('1');"
  },
  "order" : "depth_first",
  "relationships" : {
    "type" : "NEXT",
    "direction" : "out"
  }
}
```

Example response

- **201:** Created
- **Content-Type:** `application/json; charset=UTF-8`
- **Location:**
`http://localhost:7474/db/data/node/297/paged/traverse/node/b0b3e38558644c75b7aef85dd0f3d3a1`

```
[ {
  "metadata" : {
    "id" : 298,
    "labels" : [ ]
  },
  "data" : {
    "name" : "1"
  },
  "paged_traverse" :
"http://localhost:7474/db/data/node/298/paged/traverse/{returnType}?{pageSize, leaseTime}",
  "outgoing_relationships" : "http://localhost:7474/db/data/node/298/relationships/out",
  "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/298/relationships/out/{-list|&|types}",
  "create_relationship" : "http://localhost:7474/db/data/node/298/relationships",
  "labels" : "http://localhost:7474/db/data/node/298/labels",
  "traverse" : "http://localhost:7474/db/data/node/298/traverse/{returnType}",
  "extensions" : { },
  "all_relationships" : "http://localhost:7474/db/data/node/298/relationships/all",
  "all_typed_relationships" : "http://localhost:7474/db/data/node/298/relationships/all/{-list|&|types}",
  "property" : "http://localhost:7474/db/data/node/298/properties/{key}",
  "self" : "http://localhost:7474/db/data/node/298",
  "incoming_relationships" : "http://localhost:7474/db/data/node/298/relationships/in",
  "properties" : "http://localhost:7474/db/data/node/298/properties",
  "incoming_typed_relationships" : "http://localhost:7474/db/data/node/298/relationships/in/{-
```

```

list|&|types}"
}, {
  "metadata" : {
    "id" : 307,
    "labels" : [ ]
  },
  "data" : {
    "name" : "10"
  },
  "paged_traverse" :
"http://localhost:7474/db/data/node/307/paged/traverse/{returnType}{?pageSize,leaseTime}",
  "outgoing_relationships" : "http://localhost:7474/db/data/node/307/relationships/out",
  "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/307/relationships/out/{-
list|&|types}",
  "create_relationship" : "http://localhost:7474/db/data/node/307/relationships",
  "labels" : "http://localhost:7474/db/data/node/307/labels",
  "traverse" : "http://localhost:7474/db/data/node/307/traverse/{returnType}",
  "extensions" : { },
  "all_relationships" : "http://localhost:7474/db/data/node/307/relationships/all",
  "all_typed_relationships" : "http://localhost:7474/db/data/node/307/relationships/all/{-list|&|types}",
  "property" : "http://localhost:7474/db/data/node/307/properties/{key}",
  "self" : "http://localhost:7474/db/data/node/307",
  "incoming_relationships" : "http://localhost:7474/db/data/node/307/relationships/in",
  "properties" : "http://localhost:7474/db/data/node/307/properties",
  "incoming_typed_relationships" : "http://localhost:7474/db/data/node/307/relationships/in/{-
list|&|types}"
}, {
  "metadata" : {
    "id" : 308,
    "labels" : [ ]
  },
  "data" : {
    "name" : "11"
  },
  "paged_traverse" :
"http://localhost:7474/db/data/node/308/paged/traverse/{returnType}{?pageSize,leaseTime}",
  "outgoing_relationships" : "http://localhost:7474/db/data/node/308/relationships/out",
  "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/308/relationships/out/{-
list|&|types}",
  "create_relationship" : "http://localhost:7474/db/data/node/308/relationships",
  "labels" : "http://localhost:7474/db/data/node/308/labels",
  "traverse" : "http://localhost:7474/db/data/node/308/traverse/{returnType}",
  "extensions" : { },
  "all_relationships" : "http://localhost:7474/db/data/node/308/relationships/all",
  "all_typed_relationships" : "http://localhost:7474/db/data/node/308/relationships/all/{-list|&|types}",
  "property" : "http://localhost:7474/db/data/node/308/properties/{key}",
  "self" : "http://localhost:7474/db/data/node/308",
  "incoming_relationships" : "http://localhost:7474/db/data/node/308/relationships/in",
  "properties" : "http://localhost:7474/db/data/node/308/properties",
  "incoming_typed_relationships" : "http://localhost:7474/db/data/node/308/relationships/in/{-
list|&|types}"
}, {
  "metadata" : {
    "id" : 309,
    "labels" : [ ]
  },
  "data" : {
    "name" : "12"
  },
  "paged_traverse" :
"http://localhost:7474/db/data/node/309/paged/traverse/{returnType}{?pageSize,leaseTime}",
  "outgoing_relationships" : "http://localhost:7474/db/data/node/309/relationships/out",
  "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/309/relationships/out/{-
list|&|types}",
  "create_relationship" : "http://localhost:7474/db/data/node/309/relationships",
  "labels" : "http://localhost:7474/db/data/node/309/labels",
  "traverse" : "http://localhost:7474/db/data/node/309/traverse/{returnType}",
  "extensions" : { },
  "all_relationships" : "http://localhost:7474/db/data/node/309/relationships/all",
  "all_typed_relationships" : "http://localhost:7474/db/data/node/309/relationships/all/{-list|&|types}",
  "property" : "http://localhost:7474/db/data/node/309/properties/{key}",
  "self" : "http://localhost:7474/db/data/node/309",
  "incoming_relationships" : "http://localhost:7474/db/data/node/309/relationships/in",
  "properties" : "http://localhost:7474/db/data/node/309/properties",
  "incoming_typed_relationships" : "http://localhost:7474/db/data/node/309/relationships/in/{-
list|&|types}"
}, {
  "metadata" : {
    "id" : 310,
    "labels" : [ ]

```

```

    },
    "data" : {
      "name" : "13"
    },
    "paged_traverse" :
    "http://localhost:7474/db/data/node/310/paged/traverse/{returnType}{?pageSize,leaseTime}",
    "outgoing_relationships" : "http://localhost:7474/db/data/node/310/relationships/out",
    "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/310/relationships/out/{-list|&|types}",
    "create_relationship" : "http://localhost:7474/db/data/node/310/relationships",
    "labels" : "http://localhost:7474/db/data/node/310/labels",
    "traverse" : "http://localhost:7474/db/data/node/310/traverse/{returnType}",
    "extensions" : { },
    "all_relationships" : "http://localhost:7474/db/data/node/310/relationships/all",
    "all_typed_relationships" : "http://localhost:7474/db/data/node/310/relationships/all/{-list|&|types}",
    "property" : "http://localhost:7474/db/data/node/310/properties/{key}",
    "self" : "http://localhost:7474/db/data/node/310",
    "incoming_relationships" : "http://localhost:7474/db/data/node/310/relationships/in",
    "properties" : "http://localhost:7474/db/data/node/310/properties",
    "incoming_typed_relationships" : "http://localhost:7474/db/data/node/310/relationships/in/{-list|&|types}"
  }, {
    "metadata" : {
      "id" : 311,
      "labels" : [ ]
    },
    "data" : {
      "name" : "14"
    },
    "paged_traverse" :
    "http://localhost:7474/db/data/node/311/paged/traverse/{returnType}{?pageSize,leaseTime}",
    "outgoing_relationships" : "http://localhost:7474/db/data/node/311/relationships/out",
    "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/311/relationships/out/{-list|&|types}",
    "create_relationship" : "http://localhost:7474/db/data/node/311/relationships",
    "labels" : "http://localhost:7474/db/data/node/311/labels",
    "traverse" : "http://localhost:7474/db/data/node/311/traverse/{returnType}",
    "extensions" : { },
    "all_relationships" : "http://localhost:7474/db/data/node/311/relationships/all",
    "all_typed_relationships" : "http://localhost:7474/db/data/node/311/relationships/all/{-list|&|types}",
    "property" : "http://localhost:7474/db/data/node/311/properties/{key}",
    "self" : "http://localhost:7474/db/data/node/311",
    "incoming_relationships" : "http://localhost:7474/db/data/node/311/relationships/in",
    "properties" : "http://localhost:7474/db/data/node/311/properties",
    "incoming_typed_relationships" : "http://localhost:7474/db/data/node/311/relationships/in/{-list|&|types}"
  }, {
    "metadata" : {
      "id" : 312,
      "labels" : [ ]
    },
    "data" : {
      "name" : "15"
    },
    "paged_traverse" :
    "http://localhost:7474/db/data/node/312/paged/traverse/{returnType}{?pageSize,leaseTime}",
    "outgoing_relationships" : "http://localhost:7474/db/data/node/312/relationships/out",
    "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/312/relationships/out/{-list|&|types}",
    "create_relationship" : "http://localhost:7474/db/data/node/312/relationships",
    "labels" : "http://localhost:7474/db/data/node/312/labels",
    "traverse" : "http://localhost:7474/db/data/node/312/traverse/{returnType}",
    "extensions" : { },
    "all_relationships" : "http://localhost:7474/db/data/node/312/relationships/all",
    "all_typed_relationships" : "http://localhost:7474/db/data/node/312/relationships/all/{-list|&|types}",
    "property" : "http://localhost:7474/db/data/node/312/properties/{key}",
    "self" : "http://localhost:7474/db/data/node/312",
    "incoming_relationships" : "http://localhost:7474/db/data/node/312/relationships/in",
    "properties" : "http://localhost:7474/db/data/node/312/properties",
    "incoming_typed_relationships" : "http://localhost:7474/db/data/node/312/relationships/in/{-list|&|types}"
  }, {
    "metadata" : {
      "id" : 313,
      "labels" : [ ]
    },
    "data" : {
      "name" : "16"
    },
    "paged_traverse" :

```

```

"http://localhost:7474/db/data/node/313/paged/traverse/{returnType}{?pageSize,leaseTime}",
  "outgoing_relationships" : "http://localhost:7474/db/data/node/313/relationships/out",
  "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/313/relationships/out/{-list|&|types}",
  "create_relationship" : "http://localhost:7474/db/data/node/313/relationships",
  "labels" : "http://localhost:7474/db/data/node/313/labels",
  "traverse" : "http://localhost:7474/db/data/node/313/traverse/{returnType}",
  "extensions" : { },
  "all_relationships" : "http://localhost:7474/db/data/node/313/relationships/all",
  "all_typed_relationships" : "http://localhost:7474/db/data/node/313/relationships/all/{-list|&|types}",
  "property" : "http://localhost:7474/db/data/node/313/properties/{key}",
  "self" : "http://localhost:7474/db/data/node/313",
  "incoming_relationships" : "http://localhost:7474/db/data/node/313/relationships/in",
  "properties" : "http://localhost:7474/db/data/node/313/properties",
  "incoming_typed_relationships" : "http://localhost:7474/db/data/node/313/relationships/in/{-list|&|types}"
}, {
  "metadata" : {
    "id" : 314,
    "labels" : [ ]
  },
  "data" : {
    "name" : "17"
  },
  "paged_traverse" :
"http://localhost:7474/db/data/node/314/paged/traverse/{returnType}{?pageSize,leaseTime}",
  "outgoing_relationships" : "http://localhost:7474/db/data/node/314/relationships/out",
  "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/314/relationships/out/{-list|&|types}",
  "create_relationship" : "http://localhost:7474/db/data/node/314/relationships",
  "labels" : "http://localhost:7474/db/data/node/314/labels",
  "traverse" : "http://localhost:7474/db/data/node/314/traverse/{returnType}",
  "extensions" : { },
  "all_relationships" : "http://localhost:7474/db/data/node/314/relationships/all",
  "all_typed_relationships" : "http://localhost:7474/db/data/node/314/relationships/all/{-list|&|types}",
  "property" : "http://localhost:7474/db/data/node/314/properties/{key}",
  "self" : "http://localhost:7474/db/data/node/314",
  "incoming_relationships" : "http://localhost:7474/db/data/node/314/relationships/in",
  "properties" : "http://localhost:7474/db/data/node/314/properties",
  "incoming_typed_relationships" : "http://localhost:7474/db/data/node/314/relationships/in/{-list|&|types}"
}, {
  "metadata" : {
    "id" : 315,
    "labels" : [ ]
  },
  "data" : {
    "name" : "18"
  },
  "paged_traverse" :
"http://localhost:7474/db/data/node/315/paged/traverse/{returnType}{?pageSize,leaseTime}",
  "outgoing_relationships" : "http://localhost:7474/db/data/node/315/relationships/out",
  "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/315/relationships/out/{-list|&|types}",
  "create_relationship" : "http://localhost:7474/db/data/node/315/relationships",
  "labels" : "http://localhost:7474/db/data/node/315/labels",
  "traverse" : "http://localhost:7474/db/data/node/315/traverse/{returnType}",
  "extensions" : { },
  "all_relationships" : "http://localhost:7474/db/data/node/315/relationships/all",
  "all_typed_relationships" : "http://localhost:7474/db/data/node/315/relationships/all/{-list|&|types}",
  "property" : "http://localhost:7474/db/data/node/315/properties/{key}",
  "self" : "http://localhost:7474/db/data/node/315",
  "incoming_relationships" : "http://localhost:7474/db/data/node/315/relationships/in",
  "properties" : "http://localhost:7474/db/data/node/315/properties",
  "incoming_typed_relationships" : "http://localhost:7474/db/data/node/315/relationships/in/{-list|&|types}"
}, {
  "metadata" : {
    "id" : 316,
    "labels" : [ ]
  },
  "data" : {
    "name" : "19"
  },
  "paged_traverse" :
"http://localhost:7474/db/data/node/316/paged/traverse/{returnType}{?pageSize,leaseTime}",
  "outgoing_relationships" : "http://localhost:7474/db/data/node/316/relationships/out",
  "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/316/relationships/out/{-list|&|types}",
  "create_relationship" : "http://localhost:7474/db/data/node/316/relationships",

```

```

"labels" : "http://localhost:7474/db/data/node/316/labels",
"traverse" : "http://localhost:7474/db/data/node/316/traverse/{returnType}",
"extensions" : { },
"all_relationships" : "http://localhost:7474/db/data/node/316/relationships/all",
"all_typed_relationships" : "http://localhost:7474/db/data/node/316/relationships/all/{-list|&|types}",
"property" : "http://localhost:7474/db/data/node/316/properties/{key}",
"self" : "http://localhost:7474/db/data/node/316",
"incoming_relationships" : "http://localhost:7474/db/data/node/316/relationships/in",
"properties" : "http://localhost:7474/db/data/node/316/properties",
"incoming_typed_relationships" : "http://localhost:7474/db/data/node/316/relationships/in/{-
list|&|types}"
}, {
  "metadata" : {
    "id" : 318,
    "labels" : [ ]
  },
  "data" : {
    "name" : "21"
  },
  "paged_traverse" :
"http://localhost:7474/db/data/node/318/paged/traverse/{returnType}{?pageSize,leaseTime}",
  "outgoing_relationships" : "http://localhost:7474/db/data/node/318/relationships/out",
  "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/318/relationships/out/{-
list|&|types}",
  "create_relationship" : "http://localhost:7474/db/data/node/318/relationships",
  "labels" : "http://localhost:7474/db/data/node/318/labels",
  "traverse" : "http://localhost:7474/db/data/node/318/traverse/{returnType}",
  "extensions" : { },
  "all_relationships" : "http://localhost:7474/db/data/node/318/relationships/all",
  "all_typed_relationships" : "http://localhost:7474/db/data/node/318/relationships/all/{-list|&|types}",
  "property" : "http://localhost:7474/db/data/node/318/properties/{key}",
  "self" : "http://localhost:7474/db/data/node/318",
  "incoming_relationships" : "http://localhost:7474/db/data/node/318/relationships/in",
  "properties" : "http://localhost:7474/db/data/node/318/properties",
  "incoming_typed_relationships" : "http://localhost:7474/db/data/node/318/relationships/in/{-
list|&|types}"
}, {
  "metadata" : {
    "id" : 328,
    "labels" : [ ]
  },
  "data" : {
    "name" : "31"
  },
  "paged_traverse" :
"http://localhost:7474/db/data/node/328/paged/traverse/{returnType}{?pageSize,leaseTime}",
  "outgoing_relationships" : "http://localhost:7474/db/data/node/328/relationships/out",
  "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/328/relationships/out/{-
list|&|types}",
  "create_relationship" : "http://localhost:7474/db/data/node/328/relationships",
  "labels" : "http://localhost:7474/db/data/node/328/labels",
  "traverse" : "http://localhost:7474/db/data/node/328/traverse/{returnType}",
  "extensions" : { },
  "all_relationships" : "http://localhost:7474/db/data/node/328/relationships/all",
  "all_typed_relationships" : "http://localhost:7474/db/data/node/328/relationships/all/{-list|&|types}",
  "property" : "http://localhost:7474/db/data/node/328/properties/{key}",
  "self" : "http://localhost:7474/db/data/node/328",
  "incoming_relationships" : "http://localhost:7474/db/data/node/328/relationships/in",
  "properties" : "http://localhost:7474/db/data/node/328/properties",
  "incoming_typed_relationships" : "http://localhost:7474/db/data/node/328/relationships/in/{-
list|&|types}"
} ]

```

Paging through the results of a paged traverser

Paged traversers holdstate on the server, and allow clients to page through the results of a traversal. To progress to the next page of traversal results, the client issues a HTTP GET request on the paged traversal URI which causes the traversal to fill the next page (or partially fill it if insufficient results are available).

Note that if a traverser expires through inactivity it will cause a 404 response on the next GET request. Traversers' leases are renewed on every successful access for the same amount of time as originally specified.

When the paged traverser reaches the end of its results, the client can expect a 404 response as the traverser is disposed by the server.

Example request

- **GET**
http://localhost:7474/db/data/node/330/paged/traverse/node/a156b4e3c8ac48cdb74e27c280ff53f3
- **Accept:** application/json

Example response

- **200:** OK
- **Content-Type:** application/json; charset=UTF-8

```
[ {
  "metadata" : {
    "id" : 661,
    "labels" : [ ]
  },
  "data" : {
    "name" : "331"
  },
  "paged_traverse" :
"http://localhost:7474/db/data/node/661/paged/traverse/{returnType}{?pageSize,leaseTime}",
  "outgoing_relationships" : "http://localhost:7474/db/data/node/661/relationships/out",
  "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/661/relationships/out/{-list|&|types}",
  "create_relationship" : "http://localhost:7474/db/data/node/661/relationships",
  "labels" : "http://localhost:7474/db/data/node/661/labels",
  "traverse" : "http://localhost:7474/db/data/node/661/traverse/{returnType}",
  "extensions" : { },
  "all_relationships" : "http://localhost:7474/db/data/node/661/relationships/all",
  "all_typed_relationships" : "http://localhost:7474/db/data/node/661/relationships/all/{-list|&|types}",
  "property" : "http://localhost:7474/db/data/node/661/properties/{key}",
  "self" : "http://localhost:7474/db/data/node/661",
  "incoming_relationships" : "http://localhost:7474/db/data/node/661/relationships/in",
  "properties" : "http://localhost:7474/db/data/node/661/properties",
  "incoming_typed_relationships" : "http://localhost:7474/db/data/node/661/relationships/in/{-list|&|types}"
}, {
  "metadata" : {
    "id" : 671,
    "labels" : [ ]
  },
  "data" : {
    "name" : "341"
  },
  "paged_traverse" :
"http://localhost:7474/db/data/node/671/paged/traverse/{returnType}{?pageSize,leaseTime}",
  "outgoing_relationships" : "http://localhost:7474/db/data/node/671/relationships/out",
  "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/671/relationships/out/{-list|&|types}",
  "create_relationship" : "http://localhost:7474/db/data/node/671/relationships",
  "labels" : "http://localhost:7474/db/data/node/671/labels",
  "traverse" : "http://localhost:7474/db/data/node/671/traverse/{returnType}",
  "extensions" : { },
  "all_relationships" : "http://localhost:7474/db/data/node/671/relationships/all",
  "all_typed_relationships" : "http://localhost:7474/db/data/node/671/relationships/all/{-list|&|types}",
  "property" : "http://localhost:7474/db/data/node/671/properties/{key}",
  "self" : "http://localhost:7474/db/data/node/671",
  "incoming_relationships" : "http://localhost:7474/db/data/node/671/relationships/in",
  "properties" : "http://localhost:7474/db/data/node/671/properties",
  "incoming_typed_relationships" : "http://localhost:7474/db/data/node/671/relationships/in/{-list|&|types}"
}, {
  "metadata" : {
    "id" : 681,
    "labels" : [ ]
  },
  "data" : {
    "name" : "351"
  },
}
```

```

"paged_traverse" :
"http://localhost:7474/db/data/node/681/paged/traverse/{returnType}{?pageSize,leaseTime}",
"outgoing_relationships" : "http://localhost:7474/db/data/node/681/relationships/out",
"outgoing_typed_relationships" : "http://localhost:7474/db/data/node/681/relationships/out/{-list|&|types}",
"create_relationship" : "http://localhost:7474/db/data/node/681/relationships",
"labels" : "http://localhost:7474/db/data/node/681/labels",
"traverse" : "http://localhost:7474/db/data/node/681/traverse/{returnType}",
"extensions" : { },
"all_relationships" : "http://localhost:7474/db/data/node/681/relationships/all",
"all_typed_relationships" : "http://localhost:7474/db/data/node/681/relationships/all/{-list|&|types}",
"property" : "http://localhost:7474/db/data/node/681/properties/{key}",
"self" : "http://localhost:7474/db/data/node/681",
"incoming_relationships" : "http://localhost:7474/db/data/node/681/relationships/in",
"properties" : "http://localhost:7474/db/data/node/681/properties",
"incoming_typed_relationships" : "http://localhost:7474/db/data/node/681/relationships/in/{-list|&|types}"
}, {
"metadata" : {
"id" : 691,
"labels" : [ ]
},
"data" : {
"name" : "361"
},
"paged_traverse" :
"http://localhost:7474/db/data/node/691/paged/traverse/{returnType}{?pageSize,leaseTime}",
"outgoing_relationships" : "http://localhost:7474/db/data/node/691/relationships/out",
"outgoing_typed_relationships" : "http://localhost:7474/db/data/node/691/relationships/out/{-list|&|types}",
"create_relationship" : "http://localhost:7474/db/data/node/691/relationships",
"labels" : "http://localhost:7474/db/data/node/691/labels",
"traverse" : "http://localhost:7474/db/data/node/691/traverse/{returnType}",
"extensions" : { },
"all_relationships" : "http://localhost:7474/db/data/node/691/relationships/all",
"all_typed_relationships" : "http://localhost:7474/db/data/node/691/relationships/all/{-list|&|types}",
"property" : "http://localhost:7474/db/data/node/691/properties/{key}",
"self" : "http://localhost:7474/db/data/node/691",
"incoming_relationships" : "http://localhost:7474/db/data/node/691/relationships/in",
"properties" : "http://localhost:7474/db/data/node/691/properties",
"incoming_typed_relationships" : "http://localhost:7474/db/data/node/691/relationships/in/{-list|&|types}"
}, {
"metadata" : {
"id" : 701,
"labels" : [ ]
},
"data" : {
"name" : "371"
},
"paged_traverse" :
"http://localhost:7474/db/data/node/701/paged/traverse/{returnType}{?pageSize,leaseTime}",
"outgoing_relationships" : "http://localhost:7474/db/data/node/701/relationships/out",
"outgoing_typed_relationships" : "http://localhost:7474/db/data/node/701/relationships/out/{-list|&|types}",
"create_relationship" : "http://localhost:7474/db/data/node/701/relationships",
"labels" : "http://localhost:7474/db/data/node/701/labels",
"traverse" : "http://localhost:7474/db/data/node/701/traverse/{returnType}",
"extensions" : { },
"all_relationships" : "http://localhost:7474/db/data/node/701/relationships/all",
"all_typed_relationships" : "http://localhost:7474/db/data/node/701/relationships/all/{-list|&|types}",
"property" : "http://localhost:7474/db/data/node/701/properties/{key}",
"self" : "http://localhost:7474/db/data/node/701",
"incoming_relationships" : "http://localhost:7474/db/data/node/701/relationships/in",
"properties" : "http://localhost:7474/db/data/node/701/properties",
"incoming_typed_relationships" : "http://localhost:7474/db/data/node/701/relationships/in/{-list|&|types}"
}, {
"metadata" : {
"id" : 711,
"labels" : [ ]
},
"data" : {
"name" : "381"
},
"paged_traverse" :
"http://localhost:7474/db/data/node/711/paged/traverse/{returnType}{?pageSize,leaseTime}",
"outgoing_relationships" : "http://localhost:7474/db/data/node/711/relationships/out",
"outgoing_typed_relationships" : "http://localhost:7474/db/data/node/711/relationships/out/{-list|&|types}",

```

```

"create_relationship" : "http://localhost:7474/db/data/node/711/relationships",
"labels" : "http://localhost:7474/db/data/node/711/labels",
"traverse" : "http://localhost:7474/db/data/node/711/traverse/{returnType}",
"extensions" : { },
"all_relationships" : "http://localhost:7474/db/data/node/711/relationships/all",
"all_typed_relationships" : "http://localhost:7474/db/data/node/711/relationships/all/{-list|&|types}",
"property" : "http://localhost:7474/db/data/node/711/properties/{key}",
"self" : "http://localhost:7474/db/data/node/711",
"incoming_relationships" : "http://localhost:7474/db/data/node/711/relationships/in",
"properties" : "http://localhost:7474/db/data/node/711/properties",
"incoming_typed_relationships" : "http://localhost:7474/db/data/node/711/relationships/in/{-list|&|types}"
}, {
  "metadata" : {
    "id" : 721,
    "labels" : [ ]
  },
  "data" : {
    "name" : "391"
  },
  "paged_traverse" :
"http://localhost:7474/db/data/node/721/paged/traverse/{returnType}{?pageSize,leaseTime}",
  "outgoing_relationships" : "http://localhost:7474/db/data/node/721/relationships/out",
  "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/721/relationships/out/{-list|&|types}",
  "create_relationship" : "http://localhost:7474/db/data/node/721/relationships",
  "labels" : "http://localhost:7474/db/data/node/721/labels",
  "traverse" : "http://localhost:7474/db/data/node/721/traverse/{returnType}",
  "extensions" : { },
  "all_relationships" : "http://localhost:7474/db/data/node/721/relationships/all",
  "all_typed_relationships" : "http://localhost:7474/db/data/node/721/relationships/all/{-list|&|types}",
  "property" : "http://localhost:7474/db/data/node/721/properties/{key}",
  "self" : "http://localhost:7474/db/data/node/721",
  "incoming_relationships" : "http://localhost:7474/db/data/node/721/relationships/in",
  "properties" : "http://localhost:7474/db/data/node/721/properties",
  "incoming_typed_relationships" : "http://localhost:7474/db/data/node/721/relationships/in/{-list|&|types}"
}, {
  "metadata" : {
    "id" : 731,
    "labels" : [ ]
  },
  "data" : {
    "name" : "401"
  },
  "paged_traverse" :
"http://localhost:7474/db/data/node/731/paged/traverse/{returnType}{?pageSize,leaseTime}",
  "outgoing_relationships" : "http://localhost:7474/db/data/node/731/relationships/out",
  "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/731/relationships/out/{-list|&|types}",
  "create_relationship" : "http://localhost:7474/db/data/node/731/relationships",
  "labels" : "http://localhost:7474/db/data/node/731/labels",
  "traverse" : "http://localhost:7474/db/data/node/731/traverse/{returnType}",
  "extensions" : { },
  "all_relationships" : "http://localhost:7474/db/data/node/731/relationships/all",
  "all_typed_relationships" : "http://localhost:7474/db/data/node/731/relationships/all/{-list|&|types}",
  "property" : "http://localhost:7474/db/data/node/731/properties/{key}",
  "self" : "http://localhost:7474/db/data/node/731",
  "incoming_relationships" : "http://localhost:7474/db/data/node/731/relationships/in",
  "properties" : "http://localhost:7474/db/data/node/731/properties",
  "incoming_typed_relationships" : "http://localhost:7474/db/data/node/731/relationships/in/{-list|&|types}"
}, {
  "metadata" : {
    "id" : 740,
    "labels" : [ ]
  },
  "data" : {
    "name" : "410"
  },
  "paged_traverse" :
"http://localhost:7474/db/data/node/740/paged/traverse/{returnType}{?pageSize,leaseTime}",
  "outgoing_relationships" : "http://localhost:7474/db/data/node/740/relationships/out",
  "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/740/relationships/out/{-list|&|types}",
  "create_relationship" : "http://localhost:7474/db/data/node/740/relationships",
  "labels" : "http://localhost:7474/db/data/node/740/labels",
  "traverse" : "http://localhost:7474/db/data/node/740/traverse/{returnType}",
  "extensions" : { },
  "all_relationships" : "http://localhost:7474/db/data/node/740/relationships/all",

```



```

    "all_typed_relationships" : "http://localhost:7474/db/data/node/740/relationships/all/{-list|&|types}",
    "property" : "http://localhost:7474/db/data/node/740/properties/{key}",
    "self" : "http://localhost:7474/db/data/node/740",
    "incoming_relationships" : "http://localhost:7474/db/data/node/740/relationships/in",
    "properties" : "http://localhost:7474/db/data/node/740/properties",
    "incoming_typed_relationships" : "http://localhost:7474/db/data/node/740/relationships/in/{-list|&|types}"
  }, {
    "metadata" : {
      "id" : 741,
      "labels" : [ ]
    },
    "data" : {
      "name" : "411"
    },
    "paged_traverse" :
    "http://localhost:7474/db/data/node/741/paged/traverse/{returnType}{?pageSize,leaseTime}",
    "outgoing_relationships" : "http://localhost:7474/db/data/node/741/relationships/out",
    "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/741/relationships/out/{-list|&|types}",
    "create_relationship" : "http://localhost:7474/db/data/node/741/relationships",
    "labels" : "http://localhost:7474/db/data/node/741/labels",
    "traverse" : "http://localhost:7474/db/data/node/741/traverse/{returnType}",
    "extensions" : { },
    "all_relationships" : "http://localhost:7474/db/data/node/741/relationships/all",
    "all_typed_relationships" : "http://localhost:7474/db/data/node/741/relationships/all/{-list|&|types}",
    "property" : "http://localhost:7474/db/data/node/741/properties/{key}",
    "self" : "http://localhost:7474/db/data/node/741",
    "incoming_relationships" : "http://localhost:7474/db/data/node/741/relationships/in",
    "properties" : "http://localhost:7474/db/data/node/741/properties",
    "incoming_typed_relationships" : "http://localhost:7474/db/data/node/741/relationships/in/{-list|&|types}"
  }, {
    "metadata" : {
      "id" : 742,
      "labels" : [ ]
    },
    "data" : {
      "name" : "412"
    },
    "paged_traverse" :
    "http://localhost:7474/db/data/node/742/paged/traverse/{returnType}{?pageSize,leaseTime}",
    "outgoing_relationships" : "http://localhost:7474/db/data/node/742/relationships/out",
    "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/742/relationships/out/{-list|&|types}",
    "create_relationship" : "http://localhost:7474/db/data/node/742/relationships",
    "labels" : "http://localhost:7474/db/data/node/742/labels",
    "traverse" : "http://localhost:7474/db/data/node/742/traverse/{returnType}",
    "extensions" : { },
    "all_relationships" : "http://localhost:7474/db/data/node/742/relationships/all",
    "all_typed_relationships" : "http://localhost:7474/db/data/node/742/relationships/all/{-list|&|types}",
    "property" : "http://localhost:7474/db/data/node/742/properties/{key}",
    "self" : "http://localhost:7474/db/data/node/742",
    "incoming_relationships" : "http://localhost:7474/db/data/node/742/relationships/in",
    "properties" : "http://localhost:7474/db/data/node/742/properties",
    "incoming_typed_relationships" : "http://localhost:7474/db/data/node/742/relationships/in/{-list|&|types}"
  }, {
    "metadata" : {
      "id" : 743,
      "labels" : [ ]
    },
    "data" : {
      "name" : "413"
    },
    "paged_traverse" :
    "http://localhost:7474/db/data/node/743/paged/traverse/{returnType}{?pageSize,leaseTime}",
    "outgoing_relationships" : "http://localhost:7474/db/data/node/743/relationships/out",
    "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/743/relationships/out/{-list|&|types}",
    "create_relationship" : "http://localhost:7474/db/data/node/743/relationships",
    "labels" : "http://localhost:7474/db/data/node/743/labels",
    "traverse" : "http://localhost:7474/db/data/node/743/traverse/{returnType}",
    "extensions" : { },
    "all_relationships" : "http://localhost:7474/db/data/node/743/relationships/all",
    "all_typed_relationships" : "http://localhost:7474/db/data/node/743/relationships/all/{-list|&|types}",
    "property" : "http://localhost:7474/db/data/node/743/properties/{key}",
    "self" : "http://localhost:7474/db/data/node/743",
    "incoming_relationships" : "http://localhost:7474/db/data/node/743/relationships/in",
    "properties" : "http://localhost:7474/db/data/node/743/properties",

```

```

    "incoming_typed_relationships" : "http://localhost:7474/db/data/node/743/relationships/in/{-list|&|types}"
  }, {
    "metadata" : {
      "id" : 744,
      "labels" : [ ]
    },
    "data" : {
      "name" : "414"
    },
    "paged_traverse" :
    "http://localhost:7474/db/data/node/744/paged/traverse/{returnType}{?pageSize,leaseTime}",
    "outgoing_relationships" : "http://localhost:7474/db/data/node/744/relationships/out",
    "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/744/relationships/out/{-list|&|types}",
    "create_relationship" : "http://localhost:7474/db/data/node/744/relationships",
    "labels" : "http://localhost:7474/db/data/node/744/labels",
    "traverse" : "http://localhost:7474/db/data/node/744/traverse/{returnType}",
    "extensions" : { },
    "all_relationships" : "http://localhost:7474/db/data/node/744/relationships/all",
    "all_typed_relationships" : "http://localhost:7474/db/data/node/744/relationships/all/{-list|&|types}",
    "property" : "http://localhost:7474/db/data/node/744/properties/{key}",
    "self" : "http://localhost:7474/db/data/node/744",
    "incoming_relationships" : "http://localhost:7474/db/data/node/744/relationships/in",
    "properties" : "http://localhost:7474/db/data/node/744/properties",
    "incoming_typed_relationships" : "http://localhost:7474/db/data/node/744/relationships/in/{-list|&|types}"
  }, {
    "metadata" : {
      "id" : 745,
      "labels" : [ ]
    },
    "data" : {
      "name" : "415"
    },
    "paged_traverse" :
    "http://localhost:7474/db/data/node/745/paged/traverse/{returnType}{?pageSize,leaseTime}",
    "outgoing_relationships" : "http://localhost:7474/db/data/node/745/relationships/out",
    "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/745/relationships/out/{-list|&|types}",
    "create_relationship" : "http://localhost:7474/db/data/node/745/relationships",
    "labels" : "http://localhost:7474/db/data/node/745/labels",
    "traverse" : "http://localhost:7474/db/data/node/745/traverse/{returnType}",
    "extensions" : { },
    "all_relationships" : "http://localhost:7474/db/data/node/745/relationships/all",
    "all_typed_relationships" : "http://localhost:7474/db/data/node/745/relationships/all/{-list|&|types}",
    "property" : "http://localhost:7474/db/data/node/745/properties/{key}",
    "self" : "http://localhost:7474/db/data/node/745",
    "incoming_relationships" : "http://localhost:7474/db/data/node/745/relationships/in",
    "properties" : "http://localhost:7474/db/data/node/745/properties",
    "incoming_typed_relationships" : "http://localhost:7474/db/data/node/745/relationships/in/{-list|&|types}"
  }, {
    "metadata" : {
      "id" : 746,
      "labels" : [ ]
    },
    "data" : {
      "name" : "416"
    },
    "paged_traverse" :
    "http://localhost:7474/db/data/node/746/paged/traverse/{returnType}{?pageSize,leaseTime}",
    "outgoing_relationships" : "http://localhost:7474/db/data/node/746/relationships/out",
    "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/746/relationships/out/{-list|&|types}",
    "create_relationship" : "http://localhost:7474/db/data/node/746/relationships",
    "labels" : "http://localhost:7474/db/data/node/746/labels",
    "traverse" : "http://localhost:7474/db/data/node/746/traverse/{returnType}",
    "extensions" : { },
    "all_relationships" : "http://localhost:7474/db/data/node/746/relationships/all",
    "all_typed_relationships" : "http://localhost:7474/db/data/node/746/relationships/all/{-list|&|types}",
    "property" : "http://localhost:7474/db/data/node/746/properties/{key}",
    "self" : "http://localhost:7474/db/data/node/746",
    "incoming_relationships" : "http://localhost:7474/db/data/node/746/relationships/in",
    "properties" : "http://localhost:7474/db/data/node/746/properties",
    "incoming_typed_relationships" : "http://localhost:7474/db/data/node/746/relationships/in/{-list|&|types}"
  }, {
    "metadata" : {
      "id" : 747,

```

```

    "labels" : [ ]
  },
  "data" : {
    "name" : "417"
  },
  "paged_traverse" :
"http://localhost:7474/db/data/node/747/paged/traverse/{returnType}{?pageSize,leaseTime}",
  "outgoing_relationships" : "http://localhost:7474/db/data/node/747/relationships/out",
  "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/747/relationships/out/{-list|&|types}",
  "create_relationship" : "http://localhost:7474/db/data/node/747/relationships",
  "labels" : "http://localhost:7474/db/data/node/747/labels",
  "traverse" : "http://localhost:7474/db/data/node/747/traverse/{returnType}",
  "extensions" : { },
  "all_relationships" : "http://localhost:7474/db/data/node/747/relationships/all",
  "all_typed_relationships" : "http://localhost:7474/db/data/node/747/relationships/all/{-list|&|types}",
  "property" : "http://localhost:7474/db/data/node/747/properties/{key}",
  "self" : "http://localhost:7474/db/data/node/747",
  "incoming_relationships" : "http://localhost:7474/db/data/node/747/relationships/in",
  "properties" : "http://localhost:7474/db/data/node/747/properties",
  "incoming_typed_relationships" : "http://localhost:7474/db/data/node/747/relationships/in/{-list|&|types}"
}, {
  "metadata" : {
    "id" : 748,
    "labels" : [ ]
  },
  "data" : {
    "name" : "418"
  },
  "paged_traverse" :
"http://localhost:7474/db/data/node/748/paged/traverse/{returnType}{?pageSize,leaseTime}",
  "outgoing_relationships" : "http://localhost:7474/db/data/node/748/relationships/out",
  "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/748/relationships/out/{-list|&|types}",
  "create_relationship" : "http://localhost:7474/db/data/node/748/relationships",
  "labels" : "http://localhost:7474/db/data/node/748/labels",
  "traverse" : "http://localhost:7474/db/data/node/748/traverse/{returnType}",
  "extensions" : { },
  "all_relationships" : "http://localhost:7474/db/data/node/748/relationships/all",
  "all_typed_relationships" : "http://localhost:7474/db/data/node/748/relationships/all/{-list|&|types}",
  "property" : "http://localhost:7474/db/data/node/748/properties/{key}",
  "self" : "http://localhost:7474/db/data/node/748",
  "incoming_relationships" : "http://localhost:7474/db/data/node/748/relationships/in",
  "properties" : "http://localhost:7474/db/data/node/748/properties",
  "incoming_typed_relationships" : "http://localhost:7474/db/data/node/748/relationships/in/{-list|&|types}"
}, {
  "metadata" : {
    "id" : 749,
    "labels" : [ ]
  },
  "data" : {
    "name" : "419"
  },
  "paged_traverse" :
"http://localhost:7474/db/data/node/749/paged/traverse/{returnType}{?pageSize,leaseTime}",
  "outgoing_relationships" : "http://localhost:7474/db/data/node/749/relationships/out",
  "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/749/relationships/out/{-list|&|types}",
  "create_relationship" : "http://localhost:7474/db/data/node/749/relationships",
  "labels" : "http://localhost:7474/db/data/node/749/labels",
  "traverse" : "http://localhost:7474/db/data/node/749/traverse/{returnType}",
  "extensions" : { },
  "all_relationships" : "http://localhost:7474/db/data/node/749/relationships/all",
  "all_typed_relationships" : "http://localhost:7474/db/data/node/749/relationships/all/{-list|&|types}",
  "property" : "http://localhost:7474/db/data/node/749/properties/{key}",
  "self" : "http://localhost:7474/db/data/node/749",
  "incoming_relationships" : "http://localhost:7474/db/data/node/749/relationships/in",
  "properties" : "http://localhost:7474/db/data/node/749/properties",
  "incoming_typed_relationships" : "http://localhost:7474/db/data/node/749/relationships/in/{-list|&|types}"
}, {
  "metadata" : {
    "id" : 751,
    "labels" : [ ]
  },
  "data" : {
    "name" : "421"
  },

```

```

"paged_traverse" :
"http://localhost:7474/db/data/node/751/paged/traverse/{returnType}{?pageSize,leaseTime}",
"outgoing_relationships" : "http://localhost:7474/db/data/node/751/relationships/out",
"outgoing_typed_relationships" : "http://localhost:7474/db/data/node/751/relationships/out/{-list|&|types}",
"create_relationship" : "http://localhost:7474/db/data/node/751/relationships",
"labels" : "http://localhost:7474/db/data/node/751/labels",
"traverse" : "http://localhost:7474/db/data/node/751/traverse/{returnType}",
"extensions" : { },
"all_relationships" : "http://localhost:7474/db/data/node/751/relationships/all",
"all_typed_relationships" : "http://localhost:7474/db/data/node/751/relationships/all/{-list|&|types}",
"property" : "http://localhost:7474/db/data/node/751/properties/{key}",
"self" : "http://localhost:7474/db/data/node/751",
"incoming_relationships" : "http://localhost:7474/db/data/node/751/relationships/in",
"properties" : "http://localhost:7474/db/data/node/751/properties",
"incoming_typed_relationships" : "http://localhost:7474/db/data/node/751/relationships/in/{-list|&|types}"
}, {
"metadata" : {
"id" : 761,
"labels" : [ ]
},
"data" : {
"name" : "431"
},
"paged_traverse" :
"http://localhost:7474/db/data/node/761/paged/traverse/{returnType}{?pageSize,leaseTime}",
"outgoing_relationships" : "http://localhost:7474/db/data/node/761/relationships/out",
"outgoing_typed_relationships" : "http://localhost:7474/db/data/node/761/relationships/out/{-list|&|types}",
"create_relationship" : "http://localhost:7474/db/data/node/761/relationships",
"labels" : "http://localhost:7474/db/data/node/761/labels",
"traverse" : "http://localhost:7474/db/data/node/761/traverse/{returnType}",
"extensions" : { },
"all_relationships" : "http://localhost:7474/db/data/node/761/relationships/all",
"all_typed_relationships" : "http://localhost:7474/db/data/node/761/relationships/all/{-list|&|types}",
"property" : "http://localhost:7474/db/data/node/761/properties/{key}",
"self" : "http://localhost:7474/db/data/node/761",
"incoming_relationships" : "http://localhost:7474/db/data/node/761/relationships/in",
"properties" : "http://localhost:7474/db/data/node/761/properties",
"incoming_typed_relationships" : "http://localhost:7474/db/data/node/761/relationships/in/{-list|&|types}"
}, {
"metadata" : {
"id" : 771,
"labels" : [ ]
},
"data" : {
"name" : "441"
},
"paged_traverse" :
"http://localhost:7474/db/data/node/771/paged/traverse/{returnType}{?pageSize,leaseTime}",
"outgoing_relationships" : "http://localhost:7474/db/data/node/771/relationships/out",
"outgoing_typed_relationships" : "http://localhost:7474/db/data/node/771/relationships/out/{-list|&|types}",
"create_relationship" : "http://localhost:7474/db/data/node/771/relationships",
"labels" : "http://localhost:7474/db/data/node/771/labels",
"traverse" : "http://localhost:7474/db/data/node/771/traverse/{returnType}",
"extensions" : { },
"all_relationships" : "http://localhost:7474/db/data/node/771/relationships/all",
"all_typed_relationships" : "http://localhost:7474/db/data/node/771/relationships/all/{-list|&|types}",
"property" : "http://localhost:7474/db/data/node/771/properties/{key}",
"self" : "http://localhost:7474/db/data/node/771",
"incoming_relationships" : "http://localhost:7474/db/data/node/771/relationships/in",
"properties" : "http://localhost:7474/db/data/node/771/properties",
"incoming_typed_relationships" : "http://localhost:7474/db/data/node/771/relationships/in/{-list|&|types}"
} ]

```

Paged traverser page size

The default page size is 50 items, but depending on the application larger or smaller pages sizes might be appropriate. This can be set by adding a `pageSize` query parameter.

Example request

- **POST** <http://localhost:7474/db/data/node/33/paged/traverse/node?pageSize=1>
- **Accept:** application/json
- **Content-Type:** application/json

```
{
  "prune_evaluator" : {
    "language" : "builtin",
    "name" : "none"
  },
  "return_filter" : {
    "language" : "javascript",
    "body" : "position.endNode().getProperty('name').contains('1');"
  },
  "order" : "depth_first",
  "relationships" : {
    "type" : "NEXT",
    "direction" : "out"
  }
}
```

Example response

- **201:** Created
- **Content-Type:** application/json; charset=UTF-8
- **Location:**
<http://localhost:7474/db/data/node/33/paged/traverse/node/240392bd8b584549883b3e846354c306>

```
[ {
  "metadata" : {
    "id" : 34,
    "labels" : [ ]
  },
  "data" : {
    "name" : "1"
  },
  "paged_traverse" :
"http://localhost:7474/db/data/node/34/paged/traverse/{returnType}{?pageSize,leaseTime}",
  "outgoing_relationships" : "http://localhost:7474/db/data/node/34/relationships/out",
  "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/34/relationships/out/{-list|&|types}",
  "create_relationship" : "http://localhost:7474/db/data/node/34/relationships",
  "labels" : "http://localhost:7474/db/data/node/34/labels",
  "traverse" : "http://localhost:7474/db/data/node/34/traverse/{returnType}",
  "extensions" : { },
  "all_relationships" : "http://localhost:7474/db/data/node/34/relationships/all",
  "all_typed_relationships" : "http://localhost:7474/db/data/node/34/relationships/all/{-list|&|types}",
  "property" : "http://localhost:7474/db/data/node/34/properties/{key}",
  "self" : "http://localhost:7474/db/data/node/34",
  "incoming_relationships" : "http://localhost:7474/db/data/node/34/relationships/in",
  "properties" : "http://localhost:7474/db/data/node/34/properties",
  "incoming_typed_relationships" : "http://localhost:7474/db/data/node/34/relationships/in/{-list|&|types}"
} ]
```

Paged traverser timeout

The default timeout for a paged traverser is 60 seconds, but depending on the application larger or smaller timeouts might be appropriate. This can be set by adding a `leaseTime` query parameter with the number of seconds the paged traverser should last.

Example request

- **POST** <http://localhost:7474/db/data/node/807/paged/traverse/node?leaseTime=10>

- **Accept:** application/json
- **Content-Type:** application/json

```
{
  "prune_evaluator" : {
    "language" : "builtin",
    "name" : "none"
  },
  "return_filter" : {
    "language" : "javascript",
    "body" : "position.endNode().getProperty('name').contains('1');"
  },
  "order" : "depth_first",
  "relationships" : {
    "type" : "NEXT",
    "direction" : "out"
  }
}
```

Example response

- **201:** Created
- **Content-Type:** application/json; charset=UTF-8
- **Location:**
<http://localhost:7474/db/data/node/807/paged/traverse/node/90afc45f78ce49c4ad3d85ef3bca0436>

```
[ {
  "metadata" : {
    "id" : 808,
    "labels" : [ ]
  },
  "data" : {
    "name" : "1"
  },
  "paged_traverse" :
"http://localhost:7474/db/data/node/808/paged/traverse/{returnType}{?pageSize,leaseTime}",
  "outgoing_relationships" : "http://localhost:7474/db/data/node/808/relationships/out",
  "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/808/relationships/out/{-list|&|types}",
  "create_relationship" : "http://localhost:7474/db/data/node/808/relationships",
  "labels" : "http://localhost:7474/db/data/node/808/labels",
  "traverse" : "http://localhost:7474/db/data/node/808/traverse/{returnType}",
  "extensions" : { },
  "all_relationships" : "http://localhost:7474/db/data/node/808/relationships/all",
  "all_typed_relationships" : "http://localhost:7474/db/data/node/808/relationships/all/{-list|&|types}",
  "property" : "http://localhost:7474/db/data/node/808/properties/{key}",
  "self" : "http://localhost:7474/db/data/node/808",
  "incoming_relationships" : "http://localhost:7474/db/data/node/808/relationships/in",
  "properties" : "http://localhost:7474/db/data/node/808/properties",
  "incoming_typed_relationships" : "http://localhost:7474/db/data/node/808/relationships/in/{-list|&|types}"
}, {
  "metadata" : {
    "id" : 817,
    "labels" : [ ]
  },
  "data" : {
    "name" : "10"
  },
  "paged_traverse" :
"http://localhost:7474/db/data/node/817/paged/traverse/{returnType}{?pageSize,leaseTime}",
  "outgoing_relationships" : "http://localhost:7474/db/data/node/817/relationships/out",
  "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/817/relationships/out/{-list|&|types}",
  "create_relationship" : "http://localhost:7474/db/data/node/817/relationships",
  "labels" : "http://localhost:7474/db/data/node/817/labels",
  "traverse" : "http://localhost:7474/db/data/node/817/traverse/{returnType}",
  "extensions" : { },
  "all_relationships" : "http://localhost:7474/db/data/node/817/relationships/all",
  "all_typed_relationships" : "http://localhost:7474/db/data/node/817/relationships/all/{-list|&|types}",
}
```

```

"property" : "http://localhost:7474/db/data/node/817/properties/{key}",
"self" : "http://localhost:7474/db/data/node/817",
"incoming_relationships" : "http://localhost:7474/db/data/node/817/relationships/in",
"properties" : "http://localhost:7474/db/data/node/817/properties",
"incoming_typed_relationships" : "http://localhost:7474/db/data/node/817/relationships/in/{-list|&|types}"
}, {
  "metadata" : {
    "id" : 818,
    "labels" : [ ]
  },
  "data" : {
    "name" : "11"
  },
  "paged_traverse" :
"http://localhost:7474/db/data/node/818/paged/traverse/{returnType}{?pageSize,leaseTime}",
  "outgoing_relationships" : "http://localhost:7474/db/data/node/818/relationships/out",
  "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/818/relationships/out/{-list|&|types}",
  "create_relationship" : "http://localhost:7474/db/data/node/818/relationships",
  "labels" : "http://localhost:7474/db/data/node/818/labels",
  "traverse" : "http://localhost:7474/db/data/node/818/traverse/{returnType}",
  "extensions" : { },
  "all_relationships" : "http://localhost:7474/db/data/node/818/relationships/all",
  "all_typed_relationships" : "http://localhost:7474/db/data/node/818/relationships/all/{-list|&|types}",
  "property" : "http://localhost:7474/db/data/node/818/properties/{key}",
  "self" : "http://localhost:7474/db/data/node/818",
  "incoming_relationships" : "http://localhost:7474/db/data/node/818/relationships/in",
  "properties" : "http://localhost:7474/db/data/node/818/properties",
  "incoming_typed_relationships" : "http://localhost:7474/db/data/node/818/relationships/in/{-list|&|types}"
}, {
  "metadata" : {
    "id" : 819,
    "labels" : [ ]
  },
  "data" : {
    "name" : "12"
  },
  "paged_traverse" :
"http://localhost:7474/db/data/node/819/paged/traverse/{returnType}{?pageSize,leaseTime}",
  "outgoing_relationships" : "http://localhost:7474/db/data/node/819/relationships/out",
  "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/819/relationships/out/{-list|&|types}",
  "create_relationship" : "http://localhost:7474/db/data/node/819/relationships",
  "labels" : "http://localhost:7474/db/data/node/819/labels",
  "traverse" : "http://localhost:7474/db/data/node/819/traverse/{returnType}",
  "extensions" : { },
  "all_relationships" : "http://localhost:7474/db/data/node/819/relationships/all",
  "all_typed_relationships" : "http://localhost:7474/db/data/node/819/relationships/all/{-list|&|types}",
  "property" : "http://localhost:7474/db/data/node/819/properties/{key}",
  "self" : "http://localhost:7474/db/data/node/819",
  "incoming_relationships" : "http://localhost:7474/db/data/node/819/relationships/in",
  "properties" : "http://localhost:7474/db/data/node/819/properties",
  "incoming_typed_relationships" : "http://localhost:7474/db/data/node/819/relationships/in/{-list|&|types}"
}, {
  "metadata" : {
    "id" : 820,
    "labels" : [ ]
  },
  "data" : {
    "name" : "13"
  },
  "paged_traverse" :
"http://localhost:7474/db/data/node/820/paged/traverse/{returnType}{?pageSize,leaseTime}",
  "outgoing_relationships" : "http://localhost:7474/db/data/node/820/relationships/out",
  "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/820/relationships/out/{-list|&|types}",
  "create_relationship" : "http://localhost:7474/db/data/node/820/relationships",
  "labels" : "http://localhost:7474/db/data/node/820/labels",
  "traverse" : "http://localhost:7474/db/data/node/820/traverse/{returnType}",
  "extensions" : { },
  "all_relationships" : "http://localhost:7474/db/data/node/820/relationships/all",
  "all_typed_relationships" : "http://localhost:7474/db/data/node/820/relationships/all/{-list|&|types}",
  "property" : "http://localhost:7474/db/data/node/820/properties/{key}",
  "self" : "http://localhost:7474/db/data/node/820",
  "incoming_relationships" : "http://localhost:7474/db/data/node/820/relationships/in",
  "properties" : "http://localhost:7474/db/data/node/820/properties",
  "incoming_typed_relationships" : "http://localhost:7474/db/data/node/820/relationships/in/{-

```

```

list|&|types}"
}, {
  "metadata" : {
    "id" : 821,
    "labels" : [ ]
  },
  "data" : {
    "name" : "14"
  },
  "paged_traverse" :
"http://localhost:7474/db/data/node/821/paged/traverse/{returnType}{?pageSize,leaseTime}",
  "outgoing_relationships" : "http://localhost:7474/db/data/node/821/relationships/out",
  "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/821/relationships/out/{-
list|&|types}",
  "create_relationship" : "http://localhost:7474/db/data/node/821/relationships",
  "labels" : "http://localhost:7474/db/data/node/821/labels",
  "traverse" : "http://localhost:7474/db/data/node/821/traverse/{returnType}",
  "extensions" : { },
  "all_relationships" : "http://localhost:7474/db/data/node/821/relationships/all",
  "all_typed_relationships" : "http://localhost:7474/db/data/node/821/relationships/all/{-list|&|types}",
  "property" : "http://localhost:7474/db/data/node/821/properties/{key}",
  "self" : "http://localhost:7474/db/data/node/821",
  "incoming_relationships" : "http://localhost:7474/db/data/node/821/relationships/in",
  "properties" : "http://localhost:7474/db/data/node/821/properties",
  "incoming_typed_relationships" : "http://localhost:7474/db/data/node/821/relationships/in/{-
list|&|types}"
}, {
  "metadata" : {
    "id" : 822,
    "labels" : [ ]
  },
  "data" : {
    "name" : "15"
  },
  "paged_traverse" :
"http://localhost:7474/db/data/node/822/paged/traverse/{returnType}{?pageSize,leaseTime}",
  "outgoing_relationships" : "http://localhost:7474/db/data/node/822/relationships/out",
  "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/822/relationships/out/{-
list|&|types}",
  "create_relationship" : "http://localhost:7474/db/data/node/822/relationships",
  "labels" : "http://localhost:7474/db/data/node/822/labels",
  "traverse" : "http://localhost:7474/db/data/node/822/traverse/{returnType}",
  "extensions" : { },
  "all_relationships" : "http://localhost:7474/db/data/node/822/relationships/all",
  "all_typed_relationships" : "http://localhost:7474/db/data/node/822/relationships/all/{-list|&|types}",
  "property" : "http://localhost:7474/db/data/node/822/properties/{key}",
  "self" : "http://localhost:7474/db/data/node/822",
  "incoming_relationships" : "http://localhost:7474/db/data/node/822/relationships/in",
  "properties" : "http://localhost:7474/db/data/node/822/properties",
  "incoming_typed_relationships" : "http://localhost:7474/db/data/node/822/relationships/in/{-
list|&|types}"
}, {
  "metadata" : {
    "id" : 823,
    "labels" : [ ]
  },
  "data" : {
    "name" : "16"
  },
  "paged_traverse" :
"http://localhost:7474/db/data/node/823/paged/traverse/{returnType}{?pageSize,leaseTime}",
  "outgoing_relationships" : "http://localhost:7474/db/data/node/823/relationships/out",
  "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/823/relationships/out/{-
list|&|types}",
  "create_relationship" : "http://localhost:7474/db/data/node/823/relationships",
  "labels" : "http://localhost:7474/db/data/node/823/labels",
  "traverse" : "http://localhost:7474/db/data/node/823/traverse/{returnType}",
  "extensions" : { },
  "all_relationships" : "http://localhost:7474/db/data/node/823/relationships/all",
  "all_typed_relationships" : "http://localhost:7474/db/data/node/823/relationships/all/{-list|&|types}",
  "property" : "http://localhost:7474/db/data/node/823/properties/{key}",
  "self" : "http://localhost:7474/db/data/node/823",
  "incoming_relationships" : "http://localhost:7474/db/data/node/823/relationships/in",
  "properties" : "http://localhost:7474/db/data/node/823/properties",
  "incoming_typed_relationships" : "http://localhost:7474/db/data/node/823/relationships/in/{-
list|&|types}"
}, {
  "metadata" : {
    "id" : 824,
    "labels" : [ ]
  },

```



```

    },
    "data" : {
      "name" : "17"
    },
    "paged_traverse" :
    "http://localhost:7474/db/data/node/824/paged/traverse/{returnType}{?pageSize,leaseTime}",
    "outgoing_relationships" : "http://localhost:7474/db/data/node/824/relationships/out",
    "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/824/relationships/out/{-list|&|types}",
    "create_relationship" : "http://localhost:7474/db/data/node/824/relationships",
    "labels" : "http://localhost:7474/db/data/node/824/labels",
    "traverse" : "http://localhost:7474/db/data/node/824/traverse/{returnType}",
    "extensions" : { },
    "all_relationships" : "http://localhost:7474/db/data/node/824/relationships/all",
    "all_typed_relationships" : "http://localhost:7474/db/data/node/824/relationships/all/{-list|&|types}",
    "property" : "http://localhost:7474/db/data/node/824/properties/{key}",
    "self" : "http://localhost:7474/db/data/node/824",
    "incoming_relationships" : "http://localhost:7474/db/data/node/824/relationships/in",
    "properties" : "http://localhost:7474/db/data/node/824/properties",
    "incoming_typed_relationships" : "http://localhost:7474/db/data/node/824/relationships/in/{-list|&|types}"
  }, {
    "metadata" : {
      "id" : 825,
      "labels" : [ ]
    },
    "data" : {
      "name" : "18"
    },
    "paged_traverse" :
    "http://localhost:7474/db/data/node/825/paged/traverse/{returnType}{?pageSize,leaseTime}",
    "outgoing_relationships" : "http://localhost:7474/db/data/node/825/relationships/out",
    "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/825/relationships/out/{-list|&|types}",
    "create_relationship" : "http://localhost:7474/db/data/node/825/relationships",
    "labels" : "http://localhost:7474/db/data/node/825/labels",
    "traverse" : "http://localhost:7474/db/data/node/825/traverse/{returnType}",
    "extensions" : { },
    "all_relationships" : "http://localhost:7474/db/data/node/825/relationships/all",
    "all_typed_relationships" : "http://localhost:7474/db/data/node/825/relationships/all/{-list|&|types}",
    "property" : "http://localhost:7474/db/data/node/825/properties/{key}",
    "self" : "http://localhost:7474/db/data/node/825",
    "incoming_relationships" : "http://localhost:7474/db/data/node/825/relationships/in",
    "properties" : "http://localhost:7474/db/data/node/825/properties",
    "incoming_typed_relationships" : "http://localhost:7474/db/data/node/825/relationships/in/{-list|&|types}"
  }, {
    "metadata" : {
      "id" : 826,
      "labels" : [ ]
    },
    "data" : {
      "name" : "19"
    },
    "paged_traverse" :
    "http://localhost:7474/db/data/node/826/paged/traverse/{returnType}{?pageSize,leaseTime}",
    "outgoing_relationships" : "http://localhost:7474/db/data/node/826/relationships/out",
    "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/826/relationships/out/{-list|&|types}",
    "create_relationship" : "http://localhost:7474/db/data/node/826/relationships",
    "labels" : "http://localhost:7474/db/data/node/826/labels",
    "traverse" : "http://localhost:7474/db/data/node/826/traverse/{returnType}",
    "extensions" : { },
    "all_relationships" : "http://localhost:7474/db/data/node/826/relationships/all",
    "all_typed_relationships" : "http://localhost:7474/db/data/node/826/relationships/all/{-list|&|types}",
    "property" : "http://localhost:7474/db/data/node/826/properties/{key}",
    "self" : "http://localhost:7474/db/data/node/826",
    "incoming_relationships" : "http://localhost:7474/db/data/node/826/relationships/in",
    "properties" : "http://localhost:7474/db/data/node/826/properties",
    "incoming_typed_relationships" : "http://localhost:7474/db/data/node/826/relationships/in/{-list|&|types}"
  }, {
    "metadata" : {
      "id" : 828,
      "labels" : [ ]
    },
    "data" : {
      "name" : "21"
    },
    "paged_traverse" :

```

```

"http://localhost:7474/db/data/node/828/paged/traverse/{returnType}{?pageSize,leaseTime}",
  "outgoing_relationships" : "http://localhost:7474/db/data/node/828/relationships/out",
  "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/828/relationships/out/{-list|&|types}",
  "create_relationship" : "http://localhost:7474/db/data/node/828/relationships",
  "labels" : "http://localhost:7474/db/data/node/828/labels",
  "traverse" : "http://localhost:7474/db/data/node/828/traverse/{returnType}",
  "extensions" : { },
  "all_relationships" : "http://localhost:7474/db/data/node/828/relationships/all",
  "all_typed_relationships" : "http://localhost:7474/db/data/node/828/relationships/all/{-list|&|types}",
  "property" : "http://localhost:7474/db/data/node/828/properties/{key}",
  "self" : "http://localhost:7474/db/data/node/828",
  "incoming_relationships" : "http://localhost:7474/db/data/node/828/relationships/in",
  "properties" : "http://localhost:7474/db/data/node/828/properties",
  "incoming_typed_relationships" : "http://localhost:7474/db/data/node/828/relationships/in/{-list|&|types}"
}, {
  "metadata" : {
    "id" : 838,
    "labels" : [ ]
  },
  "data" : {
    "name" : "31"
  },
  "paged_traverse" :
"http://localhost:7474/db/data/node/838/paged/traverse/{returnType}{?pageSize,leaseTime}",
  "outgoing_relationships" : "http://localhost:7474/db/data/node/838/relationships/out",
  "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/838/relationships/out/{-list|&|types}",
  "create_relationship" : "http://localhost:7474/db/data/node/838/relationships",
  "labels" : "http://localhost:7474/db/data/node/838/labels",
  "traverse" : "http://localhost:7474/db/data/node/838/traverse/{returnType}",
  "extensions" : { },
  "all_relationships" : "http://localhost:7474/db/data/node/838/relationships/all",
  "all_typed_relationships" : "http://localhost:7474/db/data/node/838/relationships/all/{-list|&|types}",
  "property" : "http://localhost:7474/db/data/node/838/properties/{key}",
  "self" : "http://localhost:7474/db/data/node/838",
  "incoming_relationships" : "http://localhost:7474/db/data/node/838/relationships/in",
  "properties" : "http://localhost:7474/db/data/node/838/properties",
  "incoming_typed_relationships" : "http://localhost:7474/db/data/node/838/relationships/in/{-list|&|types}"
} ]

```

Graph Algorithms

Neo4j comes with a number of built-in graph algorithms. They are performed from a start node. The traversal is controlled by the URI and the body sent with the request. These are the parameters that can be used:

algorithm

The algorithm to choose. If not set, default is `shortestPath`. `algorithm` can have one of these values:

- `shortestPath`
- `allSimplePaths`
- `allPaths`
- `dijkstra` (optionally with `cost_property` and `default_cost` parameters)

max_depth

The maximum depth as an integer for the algorithms like `shortestPath`, where applicable. Default is 1.

Find all shortest paths

The `shortestPath` algorithm can find multiple paths between the same nodes, like in this example.

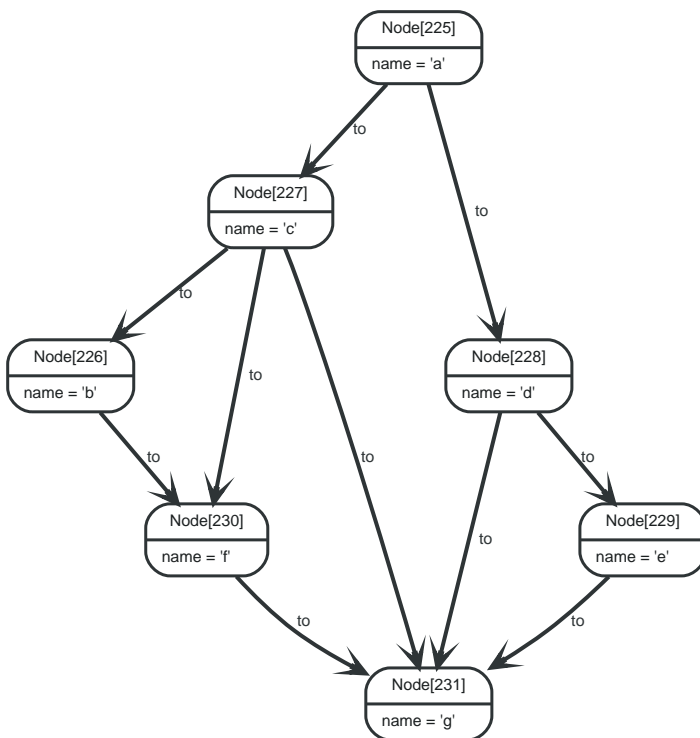


Figure 72. Final Graph

Example request

- **POST** `http://localhost:7474/db/data/node/225/paths`
- **Accept:** `application/json; charset=UTF-8`
- **Content-Type:** `application/json`

```
{
  "to" : "http://localhost:7474/db/data/node/231",
  "max_depth" : 3,
  "relationships" : {
    "type" : "to",
    "direction" : "out"
  },
  "algorithm" : "shortestPath"
}
```

Example response

- **200:** OK
- **Content-Type:** application/json; charset=UTF-8

```
[ {
  "relationships" : [ "http://localhost:7474/db/data/relationship/111",
    "http://localhost:7474/db/data/relationship/120" ],
  "nodes" : [ "http://localhost:7474/db/data/node/225", "http://localhost:7474/db/data/node/227",
    "http://localhost:7474/db/data/node/231" ],
  "directions" : [ "->", "->" ],
  "start" : "http://localhost:7474/db/data/node/225",
  "length" : 2,
  "end" : "http://localhost:7474/db/data/node/231"
}, {
  "relationships" : [ "http://localhost:7474/db/data/relationship/112",
    "http://localhost:7474/db/data/relationship/118" ],
  "nodes" : [ "http://localhost:7474/db/data/node/225", "http://localhost:7474/db/data/node/228",
    "http://localhost:7474/db/data/node/231" ],
  "directions" : [ "->", "->" ],
  "start" : "http://localhost:7474/db/data/node/225",
  "length" : 2,
  "end" : "http://localhost:7474/db/data/node/231"
} ]
```

Find one of the shortest paths

If no path algorithm is specified, a shortestPath algorithm with a max depth of 1 will be chosen. In this example, the max_depth is set to 3 in order to find the shortest path between a maximum of 3 linked nodes.

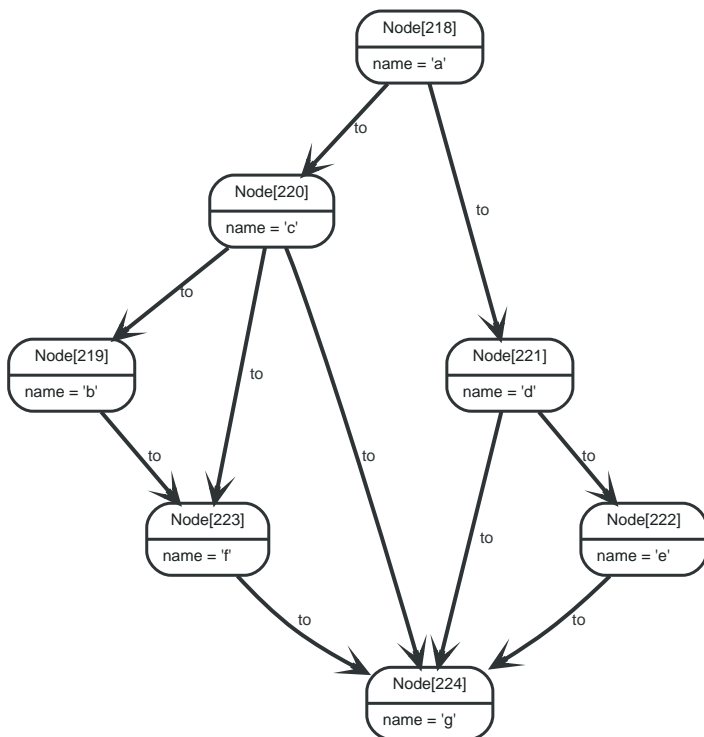


Figure 73. Final Graph

Example request

- **POST** `http://localhost:7474/db/data/node/218/path`
- **Accept:** `application/json; charset=UTF-8`
- **Content-Type:** `application/json`

```

{
  "to" : "http://localhost:7474/db/data/node/224",
  "max_depth" : 3,
  "relationships" : {
    "type" : "to",
    "direction" : "out"
  },
  "algorithm" : "shortestPath"
}

```

Example response

- **200:** OK
- **Content-Type:** `application/json; charset=UTF-8`

```

{
  "relationships" : [ "http://localhost:7474/db/data/relationship/101",
    "http://localhost:7474/db/data/relationship/110" ],
  "nodes" : [ "http://localhost:7474/db/data/node/218", "http://localhost:7474/db/data/node/220",
    "http://localhost:7474/db/data/node/224" ],
  "directions" : [ "->", "->" ],
  "start" : "http://localhost:7474/db/data/node/218",
  "length" : 2,
  "end" : "http://localhost:7474/db/data/node/224"
}

```

Execute a Dijkstra algorithm and get a single path

This example is running a Dijkstra algorithm over a graph with different cost properties on different

relationships. Note that the request URI ends with /path which means a single path is what we want here.

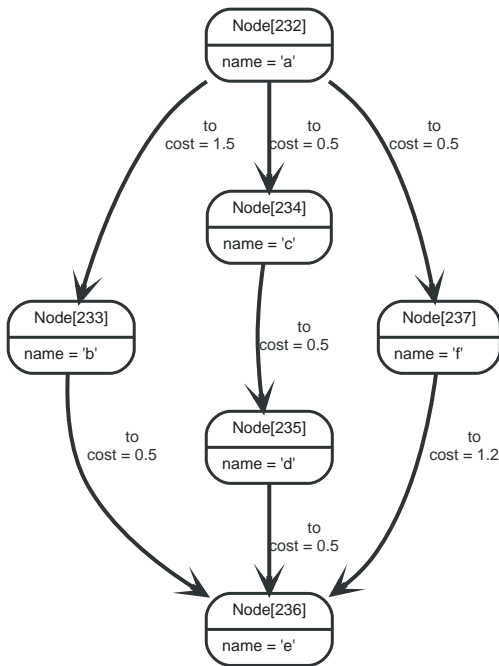


Figure 74. Final Graph

Example request

- **POST** http://localhost:7474/db/data/node/232/path
- **Accept:** application/json; charset=UTF-8
- **Content-Type:** application/json

```

{
  "to" : "http://localhost:7474/db/data/node/236",
  "cost_property" : "cost",
  "relationships" : {
    "type" : "to",
    "direction" : "out"
  },
  "algorithm" : "dijkstra"
}

```

Example response

- **200:** OK
- **Content-Type:** application/json; charset=UTF-8

```

{
  "relationships" : [ "http://localhost:7474/db/data/relationship/122",
"http://localhost:7474/db/data/relationship/124", "http://localhost:7474/db/data/relationship/125" ],
  "nodes" : [ "http://localhost:7474/db/data/node/232", "http://localhost:7474/db/data/node/234",
"http://localhost:7474/db/data/node/235", "http://localhost:7474/db/data/node/236" ],
  "directions" : [ "->", "->", "->" ],
  "start" : "http://localhost:7474/db/data/node/232",
  "length" : 3,
  "weight" : 1.5,
  "end" : "http://localhost:7474/db/data/node/236"
}

```

Execute a Dijkstra algorithm with equal weights on relationships

The following is executing a Dijkstra search on a graph with equal weights on all relationships. This example is included to show the difference when the same graph structure is used, but the path weight is equal to the number of hops.

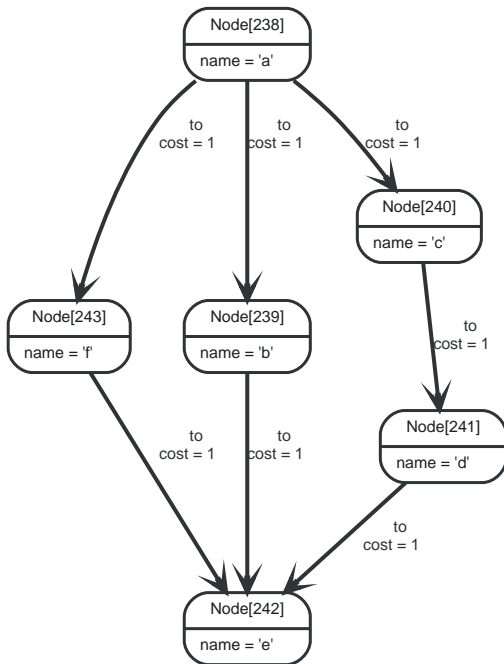


Figure 75. Final Graph

Example request

- **POST** `http://localhost:7474/db/data/node/238/path`
- **Accept:** `application/json; charset=UTF-8`
- **Content-Type:** `application/json`

```
{  
  "to" : "http://localhost:7474/db/data/node/242",  
  "cost_property" : "cost",  
  "relationships" : {  
    "type" : "to",  
    "direction" : "out"  
  },  
  "algorithm" : "dijkstra"  
}
```

Example response

- **200:** OK
- **Content-Type:** `application/json; charset=UTF-8`

```

{
  "relationships" : [ "http://localhost:7474/db/data/relationship/130",
"http://localhost:7474/db/data/relationship/134" ],
  "nodes" : [ "http://localhost:7474/db/data/node/238", "http://localhost:7474/db/data/node/243",
"http://localhost:7474/db/data/node/242" ],
  "directions" : [ "->", "->" ],
  "start" : "http://localhost:7474/db/data/node/238",
  "length" : 2,
  "weight" : 2.0,
  "end" : "http://localhost:7474/db/data/node/242"
}

```

Execute a Dijkstra algorithm and get multiple paths

This example is running a Dijkstra algorithm over a graph with different cost properties on different relationships. Note that the request URI ends with /paths which means we want multiple paths returned, in case they exist.

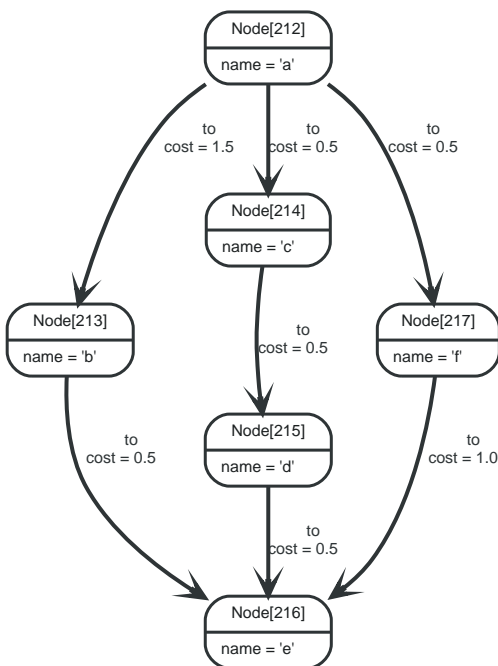


Figure 76. Final Graph

Example request

- **POST** http://localhost:7474/db/data/node/212/paths
- **Accept:** application/json; charset=UTF-8
- **Content-Type:** application/json

```

{
  "to" : "http://localhost:7474/db/data/node/216",
  "cost_property" : "cost",
  "relationships" : {
    "type" : "to",
    "direction" : "out"
  },
  "algorithm" : "dijkstra"
}

```

Example response

- **200:** OK

- **Content-Type:** application/json; charset=UTF-8

```
[ {
  "relationships" : [ "http://localhost:7474/db/data/relationship/96",
"http://localhost:7474/db/data/relationship/100" ],
  "nodes" : [ "http://localhost:7474/db/data/node/212", "http://localhost:7474/db/data/node/217",
"http://localhost:7474/db/data/node/216" ],
  "directions" : [ "->", "->" ],
  "start" : "http://localhost:7474/db/data/node/212",
  "length" : 2,
  "weight" : 1.5,
  "end" : "http://localhost:7474/db/data/node/216"
}, {
  "relationships" : [ "http://localhost:7474/db/data/relationship/95",
"http://localhost:7474/db/data/relationship/97", "http://localhost:7474/db/data/relationship/98" ],
  "nodes" : [ "http://localhost:7474/db/data/node/212", "http://localhost:7474/db/data/node/214",
"http://localhost:7474/db/data/node/215", "http://localhost:7474/db/data/node/216" ],
  "directions" : [ "->", "->", "->" ],
  "start" : "http://localhost:7474/db/data/node/212",
  "length" : 3,
  "weight" : 1.5,
  "end" : "http://localhost:7474/db/data/node/216"
} ]
```

Batch operations

Batch operations lets you execute multiple API calls through a single HTTP call. This improves performance for large insert and update operations significantly.

This service is *transactional*. If any of the operations performed fails (returns a non-2xx HTTP status code), the transaction will be rolled back and no changes will be applied.



You cannot use this resource to execute Cypher queries with USING PERIODIC COMMIT.

Execute multiple operations in batch

The batch service expects an array of job descriptions as input, each job description describing an action to be performed via the normal server API.

Each job description should contain a `to` attribute, with a value relative to the data API root (so <http://localhost:7474/db/data/node> becomes just `/node`), and a `method` attribute containing HTTP verb to use.

Optionally you may provide a `body` attribute, and an `id` attribute to help you keep track of responses, although responses are guaranteed to be returned in the same order the job descriptions are received.

The following figure outlines the different parts of the job descriptions:

```
[{"method": "PUT", "to": "/node/0/properties", "body": {"age": 1}, "id": 0}, {"method": "GET", "to": "/node/0", "id": 1}, {"method": "POST", "to": "/node", "body": {"age": 1}, "id": 2}, {"method": "POST", "to": "/node", "body": {"age": 1}, "id": 3}]
```

Diagram illustrating the structure of the job descriptions array. Brackets below the JSON objects label the fields: `method` is labeled "HTTP method", `to` is labeled "target URL", `body` is labeled "request body", and `id` is labeled "request ID".




Figure 77. Starting Graph

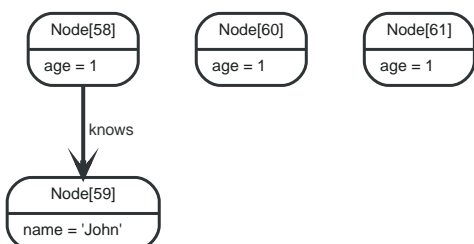


Figure 78. Final Graph

Example request

- **POST** http://localhost:7474/db/data/batch
- **Accept:** application/json; charset=UTF-8
- **Content-Type:** application/json

```
[ {
  "method" : "PUT",
  "to" : "/node/58/properties",
  "body" : {
    "age" : 1
  },
  "id" : 0
}, {
  "method" : "GET",
  "to" : "/node/58",
  "id" : 1
}, {
  "method" : "POST",
  "to" : "/node",
  "body" : {
    "age" : 1
  },
  "id" : 2
}, {
  "method" : "POST",
  "to" : "/node",
  "body" : {
    "age" : 1
  },
  "id" : 3
} ]
```

Example response

- **200:** OK
- **Content-Type:** application/json; charset=UTF-8

```
[ {
  "id" : 0,
  "from" : "/node/58/properties"
}, {
  "id" : 1,
  "body" : {
    "extensions" : { },
    "metadata" : {
      "id" : 58,
      "labels" : [ ]
    },
    "paged_traverse" :
"http://localhost:7474/db/data/node/58/paged/traverse/{returnType}{?pageSize,leaseTime}",
    "outgoing_relationships" : "http://localhost:7474/db/data/node/58/relationships/out",
    "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/58/relationships/out/{-list|&|types}",
    "create_relationship" : "http://localhost:7474/db/data/node/58/relationships",
    "labels" : "http://localhost:7474/db/data/node/58/labels",
    "traverse" : "http://localhost:7474/db/data/node/58/traverse/{returnType}",
    "all_relationships" : "http://localhost:7474/db/data/node/58/relationships/all",
    "all_typed_relationships" : "http://localhost:7474/db/data/node/58/relationships/all/{-list|&|types}",
    "property" : "http://localhost:7474/db/data/node/58/properties/{key}",
    "self" : "http://localhost:7474/db/data/node/58",
    "incoming_relationships" : "http://localhost:7474/db/data/node/58/relationships/in",
    "properties" : "http://localhost:7474/db/data/node/58/properties",
    "incoming_typed_relationships" : "http://localhost:7474/db/data/node/58/relationships/in/{-list|&|types}",
    "data" : {
      "age" : 1
    }
  },
  "from" : "/node/58"
}, {
  "id" : 2,
  "location" : "http://localhost:7474/db/data/node/60",
  "body" : {
```

```

    "extensions" : { },
    "metadata" : {
      "id" : 60,
      "labels" : [ ]
    },
    "paged_traverse" :
    "http://localhost:7474/db/data/node/60/paged/traverse/{returnType}{?pageSize,leaseTime}",
    "outgoing_relationships" : "http://localhost:7474/db/data/node/60/relationships/out",
    "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/60/relationships/out/{-list|&|types}",
    "create_relationship" : "http://localhost:7474/db/data/node/60/relationships",
    "labels" : "http://localhost:7474/db/data/node/60/labels",
    "traverse" : "http://localhost:7474/db/data/node/60/traverse/{returnType}",
    "all_relationships" : "http://localhost:7474/db/data/node/60/relationships/all",
    "all_typed_relationships" : "http://localhost:7474/db/data/node/60/relationships/all/{-list|&|types}",
    "property" : "http://localhost:7474/db/data/node/60/properties/{key}",
    "self" : "http://localhost:7474/db/data/node/60",
    "incoming_relationships" : "http://localhost:7474/db/data/node/60/relationships/in",
    "properties" : "http://localhost:7474/db/data/node/60/properties",
    "incoming_typed_relationships" : "http://localhost:7474/db/data/node/60/relationships/in/{-list|&|types}",
    "data" : {
      "age" : 1
    }
  },
  "from" : "/node"
}, {
  "id" : 3,
  "location" : "http://localhost:7474/db/data/node/61",
  "body" : {
    "extensions" : { },
    "metadata" : {
      "id" : 61,
      "labels" : [ ]
    },
    "paged_traverse" :
    "http://localhost:7474/db/data/node/61/paged/traverse/{returnType}{?pageSize,leaseTime}",
    "outgoing_relationships" : "http://localhost:7474/db/data/node/61/relationships/out",
    "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/61/relationships/out/{-list|&|types}",
    "create_relationship" : "http://localhost:7474/db/data/node/61/relationships",
    "labels" : "http://localhost:7474/db/data/node/61/labels",
    "traverse" : "http://localhost:7474/db/data/node/61/traverse/{returnType}",
    "all_relationships" : "http://localhost:7474/db/data/node/61/relationships/all",
    "all_typed_relationships" : "http://localhost:7474/db/data/node/61/relationships/all/{-list|&|types}",
    "property" : "http://localhost:7474/db/data/node/61/properties/{key}",
    "self" : "http://localhost:7474/db/data/node/61",
    "incoming_relationships" : "http://localhost:7474/db/data/node/61/relationships/in",
    "properties" : "http://localhost:7474/db/data/node/61/properties",
    "incoming_typed_relationships" : "http://localhost:7474/db/data/node/61/relationships/in/{-list|&|types}",
    "data" : {
      "age" : 1
    }
  },
  "from" : "/node"
} ]

```

Refer to items created earlier in the same batch job

The batch operation API allows you to refer to the URI returned from a created resource in subsequent job descriptions, within the same batch call.

Use the `{[JOB ID]}` special syntax to inject URIs from created resources into JSON strings in subsequent job descriptions.




Figure 79. Final Graph

Example request

- **POST** http://localhost:7474/db/data/batch
- **Accept:** application/json; charset=UTF-8
- **Content-Type:** application/json

```

[ {
  "method" : "POST",
  "to" : "/node",
  "id" : 0,
  "body" : {
    "name" : "bob"
  }
}, {
  "method" : "POST",
  "to" : "/node",
  "id" : 1,
  "body" : {
    "age" : 12
  }
}, {
  "method" : "POST",
  "to" : "{0}/relationships",
  "id" : 3,
  "body" : {
    "to" : "{1}",
    "data" : {
      "since" : "2010"
    },
    "type" : "KNOWS"
  }
}, {
  "method" : "POST",
  "to" : "/index/relationship/my_rels",
  "id" : 4,
  "body" : {
    "key" : "since",
    "value" : "2010",
    "uri" : "{3}"
  }
}
]
  
```

Example response

- **200:** OK
- **Content-Type:** application/json; charset=UTF-8

```

[ {
  "id" : 0,
  "location" : "http://localhost:7474/db/data/node/51",
  "body" : {
    "extensions" : { },
    "metadata" : {
      "id" : 51,
      "labels" : [ ]
    },
    "paged_traverse" :
  }
}
]
  
```

```

"http://localhost:7474/db/data/node/51/paged/traverse/{returnType}?pageSize,leaseTime",
  "outgoing_relationships" : "http://localhost:7474/db/data/node/51/relationships/out",
  "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/51/relationships/out/{-
list|&|types}",
  "create_relationship" : "http://localhost:7474/db/data/node/51/relationships",
  "labels" : "http://localhost:7474/db/data/node/51/labels",
  "traverse" : "http://localhost:7474/db/data/node/51/traverse/{returnType}",
  "all_relationships" : "http://localhost:7474/db/data/node/51/relationships/all",
  "all_typed_relationships" : "http://localhost:7474/db/data/node/51/relationships/all/{-list|&|types}",
  "property" : "http://localhost:7474/db/data/node/51/properties/{key}",
  "self" : "http://localhost:7474/db/data/node/51",
  "incoming_relationships" : "http://localhost:7474/db/data/node/51/relationships/in",
  "properties" : "http://localhost:7474/db/data/node/51/properties",
  "incoming_typed_relationships" : "http://localhost:7474/db/data/node/51/relationships/in/{-
list|&|types}",
  "data" : {
    "name" : "bob"
  }
},
"from" : "/node"
}, {
  "id" : 1,
  "location" : "http://localhost:7474/db/data/node/52",
  "body" : {
    "extensions" : { },
    "metadata" : {
      "id" : 52,
      "labels" : [ ]
    },
    "paged_traverse" :
"http://localhost:7474/db/data/node/52/paged/traverse/{returnType}?pageSize,leaseTime",
    "outgoing_relationships" : "http://localhost:7474/db/data/node/52/relationships/out",
    "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/52/relationships/out/{-
list|&|types}",
    "create_relationship" : "http://localhost:7474/db/data/node/52/relationships",
    "labels" : "http://localhost:7474/db/data/node/52/labels",
    "traverse" : "http://localhost:7474/db/data/node/52/traverse/{returnType}",
    "all_relationships" : "http://localhost:7474/db/data/node/52/relationships/all",
    "all_typed_relationships" : "http://localhost:7474/db/data/node/52/relationships/all/{-list|&|types}",
    "property" : "http://localhost:7474/db/data/node/52/properties/{key}",
    "self" : "http://localhost:7474/db/data/node/52",
    "incoming_relationships" : "http://localhost:7474/db/data/node/52/relationships/in",
    "properties" : "http://localhost:7474/db/data/node/52/properties",
    "incoming_typed_relationships" : "http://localhost:7474/db/data/node/52/relationships/in/{-
list|&|types}",
    "data" : {
      "age" : 12
    }
  },
  "from" : "/node"
}, {
  "id" : 3,
  "location" : "http://localhost:7474/db/data/relationship/2",
  "body" : {
    "extensions" : { },
    "metadata" : {
      "id" : 2,
      "type" : "KNOWS"
    },
    "property" : "http://localhost:7474/db/data/relationship/2/properties/{key}",
    "start" : "http://localhost:7474/db/data/node/51",
    "self" : "http://localhost:7474/db/data/relationship/2",
    "end" : "http://localhost:7474/db/data/node/52",
    "type" : "KNOWS",
    "properties" : "http://localhost:7474/db/data/relationship/2/properties",
    "data" : {
      "since" : "2010"
    }
  },
  "from" : "http://localhost:7474/db/data/node/51/relationships"
}, {
  "id" : 4,
  "location" : "http://localhost:7474/db/data/index/relationship/my_rels/since/2010/2",
  "body" : {
    "extensions" : { },
    "metadata" : {
      "id" : 2,
      "type" : "KNOWS"
    },
    "property" : "http://localhost:7474/db/data/relationship/2/properties/{key}",

```

```

"start" : "http://localhost:7474/db/data/node/51",
"self" : "http://localhost:7474/db/data/relationship/2",
"end" : "http://localhost:7474/db/data/node/52",
"type" : "KNOWS",
"properties" : "http://localhost:7474/db/data/relationship/2/properties",
"data" : {
  "since" : "2010"
},
"indexed" : "http://localhost:7474/db/data/index/relationship/my_rels/since/2010/2"
},
"from" : "/index/relationship/my_rels"
} ]

```

Execute multiple operations in batch streaming

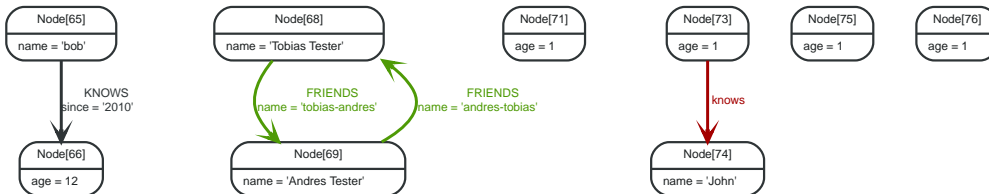


Figure 80. Final Graph

Example request

- **POST** http://localhost:7474/db/data/batch
- **Accept:** application/json
- **Content-Type:** application/json
- **X-Stream:** true

```

[ {
  "method" : "PUT",
  "to" : "/node/73/properties",
  "body" : {
    "age" : 1
  },
  "id" : 0
}, {
  "method" : "GET",
  "to" : "/node/73",
  "id" : 1
}, {
  "method" : "POST",
  "to" : "/node",
  "body" : {
    "age" : 1
  },
  "id" : 2
}, {
  "method" : "POST",
  "to" : "/node",
  "body" : {
    "age" : 1
  },
  "id" : 3
} ]

```

Example response

- **200:** OK
- **Content-Type:** application/json; charset=UTF-8

```

[ {
  "id" : 0,

```

```

"from" : "/node/73/properties",
"body" : null,
"status" : 204
}, {
  "id" : 1,
  "from" : "/node/73",
  "body" : {
    "extensions" : { },
    "metadata" : {
      "id" : 73,
      "labels" : [ ]
    }
  },
  "paged_traverse" :
"http://localhost:7474/db/data/node/73/paged/traverse/{returnType}{?pageSize,leaseTime}",
  "outgoing_relationships" : "http://localhost:7474/db/data/node/73/relationships/out",
  "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/73/relationships/out/{-list|&|types}",
  "create_relationship" : "http://localhost:7474/db/data/node/73/relationships",
  "labels" : "http://localhost:7474/db/data/node/73/labels",
  "traverse" : "http://localhost:7474/db/data/node/73/traverse/{returnType}",
  "all_relationships" : "http://localhost:7474/db/data/node/73/relationships/all",
  "all_typed_relationships" : "http://localhost:7474/db/data/node/73/relationships/all/{-list|&|types}",
  "property" : "http://localhost:7474/db/data/node/73/properties/{key}",
  "self" : "http://localhost:7474/db/data/node/73",
  "incoming_relationships" : "http://localhost:7474/db/data/node/73/relationships/in",
  "properties" : "http://localhost:7474/db/data/node/73/properties",
  "incoming_typed_relationships" : "http://localhost:7474/db/data/node/73/relationships/in/{-list|&|types}",
  "data" : {
    "age" : 1
  }
},
"status" : 200
}, {
  "id" : 2,
  "from" : "/node",
  "body" : {
    "extensions" : { },
    "metadata" : {
      "id" : 75,
      "labels" : [ ]
    }
  },
  "paged_traverse" :
"http://localhost:7474/db/data/node/75/paged/traverse/{returnType}{?pageSize,leaseTime}",
  "outgoing_relationships" : "http://localhost:7474/db/data/node/75/relationships/out",
  "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/75/relationships/out/{-list|&|types}",
  "create_relationship" : "http://localhost:7474/db/data/node/75/relationships",
  "labels" : "http://localhost:7474/db/data/node/75/labels",
  "traverse" : "http://localhost:7474/db/data/node/75/traverse/{returnType}",
  "all_relationships" : "http://localhost:7474/db/data/node/75/relationships/all",
  "all_typed_relationships" : "http://localhost:7474/db/data/node/75/relationships/all/{-list|&|types}",
  "property" : "http://localhost:7474/db/data/node/75/properties/{key}",
  "self" : "http://localhost:7474/db/data/node/75",
  "incoming_relationships" : "http://localhost:7474/db/data/node/75/relationships/in",
  "properties" : "http://localhost:7474/db/data/node/75/properties",
  "incoming_typed_relationships" : "http://localhost:7474/db/data/node/75/relationships/in/{-list|&|types}",
  "data" : {
    "age" : 1
  }
},
"location" : "http://localhost:7474/db/data/node/75",
"status" : 201
}, {
  "id" : 3,
  "from" : "/node",
  "body" : {
    "extensions" : { },
    "metadata" : {
      "id" : 76,
      "labels" : [ ]
    }
  },
  "paged_traverse" :
"http://localhost:7474/db/data/node/76/paged/traverse/{returnType}{?pageSize,leaseTime}",
  "outgoing_relationships" : "http://localhost:7474/db/data/node/76/relationships/out",
  "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/76/relationships/out/{-list|&|types}",
  "create_relationship" : "http://localhost:7474/db/data/node/76/relationships",
  "labels" : "http://localhost:7474/db/data/node/76/labels",

```



```
"traverse" : "http://localhost:7474/db/data/node/76/traverse/{returnType}",
"all_relationships" : "http://localhost:7474/db/data/node/76/relationships/all",
"all_typed_relationships" : "http://localhost:7474/db/data/node/76/relationships/all/{-list|&|types}",
"property" : "http://localhost:7474/db/data/node/76/properties/{key}",
"self" : "http://localhost:7474/db/data/node/76",
"incoming_relationships" : "http://localhost:7474/db/data/node/76/relationships/in",
"properties" : "http://localhost:7474/db/data/node/76/properties",
"incoming_typed_relationships" : "http://localhost:7474/db/data/node/76/relationships/in/{-
list|&|types}",
  "data" : {
    "age" : 1
  }
},
"location" : "http://localhost:7474/db/data/node/76",
"status" : 201
} ]
```

Legacy indexing



This documents the legacy indexing in Neo4j, which is no longer the preferred way to handle indexes. Consider looking at [Indexing](#).

An index can contain either nodes or relationships.



To create an index with default configuration, simply start using it by adding nodes/relationships to it. It will then be automatically created for you.

What default configuration means depends on how you have configured your database. If you haven't changed any indexing configuration, it means the indexes will be using a Lucene-based backend.

All the examples below show you how to do operations on node indexes, but all of them are just as applicable to relationship indexes. Simple change the "node" part of the URL to "relationship".

If you want to customize the index settings, see [Create node index with configuration](#).

Create node index



Instead of creating the index this way, you can simply start to use it, and it will be created automatically with default configuration.

Example request

- **POST** `http://localhost:7474/db/data/index/node/`
- **Accept:** `application/json; charset=UTF-8`
- **Content-Type:** `application/json`

```
{  
  "name" : "index_1462496403469_1"  
}
```

Example response

- **201:** Created
- **Content-Type:** `application/json; charset=UTF-8`
- **Location:** `http://localhost:7474/db/data/index/node/index_1462496403469_1/`

```
{  
  "template" : "http://localhost:7474/db/data/index/node/index_1462496403469_1/{key}/{value}"  
}
```

Create node index with configuration

This request is only necessary if you want to customize the index settings. If you are happy with the defaults, you can just start indexing nodes/relationships, as non-existent indexes will automatically be created as you do. See [\[indexing-create-advanced\]](#) for more information on index configuration.

Example request

- **POST** `http://localhost:7474/db/data/index/node/`

- **Accept:** application/json; charset=UTF-8
- **Content-Type:** application/json

```
{
  "name" : "fulltext",
  "config" : {
    "type" : "fulltext",
    "provider" : "lucene"
  }
}
```

Example response

- **201:** Created
- **Content-Type:** application/json; charset=UTF-8
- **Location:** http://localhost:7474/db/data/index/node/fulltext/

```
{
  "template" : "http://localhost:7474/db/data/index/node/fulltext/{key}/{value}",
  "type" : "fulltext",
  "provider" : "lucene"
}
```

Delete node index

Example request

- **DELETE** http://localhost:7474/db/data/index/node/index_1462496402446_1
- **Accept:** application/json; charset=UTF-8

Example response

- **204:** No Content

List node indexes

Example request

- **GET** http://localhost:7474/db/data/index/node/
- **Accept:** application/json; charset=UTF-8

Example response

- **200:** OK
- **Content-Type:** application/json; charset=UTF-8

```

{
  "index_1462496402231_1" : {
    "template" : "http://localhost:7474/db/data/index/node/index_1462496402231_1/{key}/{value}",
    "provider" : "lucene",
    "type" : "exact"
  },
  "index_1462496402643_1" : {
    "template" : "http://localhost:7474/db/data/index/node/index_1462496402643_1/{key}/{value}",
    "provider" : "lucene",
    "type" : "exact"
  },
  "index_1462496401627_1" : {
    "template" : "http://localhost:7474/db/data/index/node/index_1462496401627_1/{key}/{value}",
    "provider" : "lucene",
    "type" : "exact"
  },
  "index_1462496402021_1" : {
    "template" : "http://localhost:7474/db/data/index/node/index_1462496402021_1/{key}/{value}",
    "provider" : "lucene",
    "type" : "exact"
  },
  "index_1462496402647_1" : {
    "template" : "http://localhost:7474/db/data/index/node/index_1462496402647_1/{key}/{value}",
    "provider" : "lucene",
    "type" : "exact"
  },
  "index_1462496401632_1" : {
    "template" : "http://localhost:7474/db/data/index/node/index_1462496401632_1/{key}/{value}",
    "provider" : "lucene",
    "type" : "exact"
  },
  "index_1462496401610_1" : {
    "template" : "http://localhost:7474/db/data/index/node/index_1462496401610_1/{key}/{value}",
    "provider" : "lucene",
    "type" : "exact"
  },
  "index_1462496401661_1" : {
    "template" : "http://localhost:7474/db/data/index/node/index_1462496401661_1/{key}/{value}",
    "provider" : "lucene",
    "type" : "exact"
  },
  "index_1462496402562_1" : {
    "template" : "http://localhost:7474/db/data/index/node/index_1462496402562_1/{key}/{value}",
    "provider" : "lucene",
    "type" : "exact"
  },
  "index_1462496402085_1" : {
    "template" : "http://localhost:7474/db/data/index/node/index_1462496402085_1/{key}/{value}",
    "provider" : "lucene",
    "type" : "exact"
  },
  "index_1462496402100_1" : {
    "template" : "http://localhost:7474/db/data/index/node/index_1462496402100_1/{key}/{value}",
    "provider" : "lucene",
    "type" : "exact"
  },
  "index_1462496402327_1" : {
    "template" : "http://localhost:7474/db/data/index/node/index_1462496402327_1/{key}/{value}",
    "provider" : "lucene",
    "type" : "exact"
  },
  "index_1462496402157_1" : {
    "template" : "http://localhost:7474/db/data/index/node/index_1462496402157_1/{key}/{value}",
    "provider" : "lucene",
    "type" : "exact"
  },
  "index_1462496402508_1" : {
    "template" : "http://localhost:7474/db/data/index/node/index_1462496402508_1/{key}/{value}",
    "provider" : "lucene",
    "type" : "exact"
  }
}

```

Add node to index

Associates a node with the given key/value pair in the given index.



Spaces in the URI have to be encoded as %20.



This does **not** overwrite previous entries. If you index the same key/value/item combination twice, two index entries are created. To do update-type operations, you need to delete the old entry before adding a new one.

Example request

- **POST** http://localhost:7474/db/data/index/node/index_1462496402100_1
- **Accept:** application/json; charset=UTF-8
- **Content-Type:** application/json

```
{
  "value" : "some value",
  "uri" : "http://localhost:7474/db/data/node/11",
  "key" : "some-key"
}
```

Example response

- **201:** Created
- **Content-Type:** application/json; charset=UTF-8
- **Location:** http://localhost:7474/db/data/index/node/index_1462496402100_1/some-key/some%20value/11

```
{
  "extensions" : { },
  "metadata" : {
    "id" : 11,
    "labels" : [ ]
  },
  "paged_traverse" :
"http://localhost:7474/db/data/node/11/paged/traverse/{returnType}{?pageSize,leaseTime}",
  "outgoing_relationships" : "http://localhost:7474/db/data/node/11/relationships/out",
  "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/11/relationships/out/{-list|&|types}",
  "create_relationship" : "http://localhost:7474/db/data/node/11/relationships",
  "labels" : "http://localhost:7474/db/data/node/11/labels",
  "traverse" : "http://localhost:7474/db/data/node/11/traverse/{returnType}",
  "all_relationships" : "http://localhost:7474/db/data/node/11/relationships/all",
  "all_typed_relationships" : "http://localhost:7474/db/data/node/11/relationships/all/{-list|&|types}",
  "property" : "http://localhost:7474/db/data/node/11/properties/{key}",
  "self" : "http://localhost:7474/db/data/node/11",
  "incoming_relationships" : "http://localhost:7474/db/data/node/11/relationships/in",
  "properties" : "http://localhost:7474/db/data/node/11/properties",
  "incoming_typed_relationships" : "http://localhost:7474/db/data/node/11/relationships/in/{-list|&|types}",
  "data" : { },
  "indexed" : "http://localhost:7474/db/data/index/node/index_1462496402100_1/some-key/some%20value/11"
}
```

Remove all entries with a given node from an index

Example request

- **DELETE** http://localhost:7474/db/data/index/node/index_1462496402562_1/16

- **Accept:** application/json; charset=UTF-8

Example response

- **204:** No Content

Remove all entries with a given node and key from an index

Example request

- **DELETE** http://localhost:7474/db/data/index/node/index_1462496402963_1/kvkey2/19
- **Accept:** application/json; charset=UTF-8

Example response

- **204:** No Content

Remove all entries with a given node, key and value from an index

Example request

- **DELETE** http://localhost:7474/db/data/index/node/index_1462496402157_1/kvkey1/value1/12
- **Accept:** application/json; charset=UTF-8

Example response

- **204:** No Content

Find node by exact match



Spaces in the URI have to be encoded as %20.

Example request

- **GET** http://localhost:7474/db/data/index/node/index_1462496403400_1/key/the%2520value
- **Accept:** application/json; charset=UTF-8

Example response

- **200:** OK
- **Content-Type:** application/json; charset=UTF-8

```
[ {
  "metadata" : {
    "id" : 27,
    "labels" : [ ]
  },
  "data" : { },
  "indexed" : "http://localhost:7474/db/data/index/node/index_1462496403400_1/key/the%2520value/27",
  "paged_traverse" :
"http://localhost:7474/db/data/node/27/paged/traverse/{returnType}{?pageSize,leaseTime}",
  "outgoing_relationships" : "http://localhost:7474/db/data/node/27/relationships/out",
  "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/27/relationships/out/{-list|&|types}",
  "create_relationship" : "http://localhost:7474/db/data/node/27/relationships",
  "labels" : "http://localhost:7474/db/data/node/27/labels",
  "traverse" : "http://localhost:7474/db/data/node/27/traverse/{returnType}",
  "extensions" : { },
  "all_relationships" : "http://localhost:7474/db/data/node/27/relationships/all",
  "all_typed_relationships" : "http://localhost:7474/db/data/node/27/relationships/all/{-list|&|types}",
  "property" : "http://localhost:7474/db/data/node/27/properties/{key}",
  "self" : "http://localhost:7474/db/data/node/27",
  "incoming_relationships" : "http://localhost:7474/db/data/node/27/relationships/in",
  "properties" : "http://localhost:7474/db/data/node/27/properties",
  "incoming_typed_relationships" : "http://localhost:7474/db/data/node/27/relationships/in/{-list|&|types}"
} ]
```

Find node by query

The query language used here depends on what type of index you are querying. The default index type is Lucene, in which case you should use the Lucene query language here. Below an example of a fuzzy search over multiple keys.

See:

http://lucene.apache.org/core/5_4_0/queryparser/org/apache/lucene/queryparser/classic/package-summary.html

Getting the results with a predefined ordering requires adding the parameter

`order=ordering`

where `ordering` is one of `index`, `relevance` or `score`. In this case an additional field will be added to each result, named `score`, that holds the float value that is the score reported by the query result.

Example request

- **GET**
http://localhost:7474/db/data/index/node/index_1462496403335_1?query=Name:Build~0.1%20AND%20Gender:Male
- **Accept:** application/json; charset=UTF-8

Example response

- **200:** OK
- **Content-Type:** application/json; charset=UTF-8

```
[ {
  "metadata" : {
    "id" : 26,
    "labels" : [ ]
  },
  "data" : {
    "Name" : "Builder"
  },
  "paged_traverse" :
"http://localhost:7474/db/data/node/26/paged/traverse/{returnType}{?pageSize,leaseTime}",
  "outgoing_relationships" : "http://localhost:7474/db/data/node/26/relationships/out",
  "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/26/relationships/out/{-
list|&|types}",
  "create_relationship" : "http://localhost:7474/db/data/node/26/relationships",
  "labels" : "http://localhost:7474/db/data/node/26/labels",
  "traverse" : "http://localhost:7474/db/data/node/26/traverse/{returnType}",
  "extensions" : { },
  "all_relationships" : "http://localhost:7474/db/data/node/26/relationships/all",
  "all_typed_relationships" : "http://localhost:7474/db/data/node/26/relationships/all/{-list|&|types}",
  "property" : "http://localhost:7474/db/data/node/26/properties/{key}",
  "self" : "http://localhost:7474/db/data/node/26",
  "incoming_relationships" : "http://localhost:7474/db/data/node/26/relationships/in",
  "properties" : "http://localhost:7474/db/data/node/26/properties",
  "incoming_typed_relationships" : "http://localhost:7474/db/data/node/26/relationships/in/{-
list|&|types}"
} ]
```


Unique Indexing



As of Neo4j 2.0, unique constraints have been added. These make Neo4j enforce the uniqueness, guaranteeing that uniqueness is maintained. See [\[graphdb-neo4j-schema-constraints\]](#) for details about this. For most cases, the unique constraints should be used rather than the features described below.

For uniqueness enforcements, there are two modes:

- URL Parameter **uniqueness=get_or_create**: Create a new node/relationship and index it if no existing one can be found. If an existing node/relationship is found, discard the sent data and return the existing node/relationship.
- URL Parameter **uniqueness=create_or_fail**: Create a new node/relationship if no existing one can be found in the index. If an existing node/relationship is found, return a conflict error.

For more information, see [\[transactions-unique-nodes\]](#).

Get or create unique node (create)

The node is created if it doesn't exist in the unique index already.

Example request

- **POST**
`http://localhost:7474/db/data/index/node/index_1462496403287_1?uniqueness=get_or_create`
- **Accept:** application/json; charset=UTF-8
- **Content-Type:** application/json

```
{
  "key" : "name",
  "value" : "Tobias",
  "properties" : {
    "name" : "Tobias",
    "sequence" : 1
  }
}
```

Example response

- **201:** Created
- **Content-Type:** application/json; charset=UTF-8
- **Location:** `http://localhost:7474/db/data/index/node/index_1462496403287_1/name/Tobias/25`

```

{
  "extensions" : { },
  "metadata" : {
    "id" : 25,
    "labels" : [ ]
  },
  "paged_traverse" :
"http://localhost:7474/db/data/node/25/paged/traverse/{returnType}{?pageSize,leaseTime}",
  "outgoing_relationships" : "http://localhost:7474/db/data/node/25/relationships/out",
  "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/25/relationships/out/{-list|&|types}",
  "create_relationship" : "http://localhost:7474/db/data/node/25/relationships",
  "labels" : "http://localhost:7474/db/data/node/25/labels",
  "traverse" : "http://localhost:7474/db/data/node/25/traverse/{returnType}",
  "all_relationships" : "http://localhost:7474/db/data/node/25/relationships/all",
  "all_typed_relationships" : "http://localhost:7474/db/data/node/25/relationships/all/{-list|&|types}",
  "property" : "http://localhost:7474/db/data/node/25/properties/{key}",
  "self" : "http://localhost:7474/db/data/node/25",
  "incoming_relationships" : "http://localhost:7474/db/data/node/25/relationships/in",
  "properties" : "http://localhost:7474/db/data/node/25/properties",
  "incoming_typed_relationships" : "http://localhost:7474/db/data/node/25/relationships/in/{-list|&|types}",
  "data" : {
    "sequence" : 1,
    "name" : "Tobias"
  },
  "indexed" : "http://localhost:7474/db/data/index/node/index_1462496403287_1/name/Tobias/25"
}

```

Get or create unique node (existing)

Here, a node is not created but the existing unique node returned, since another node is indexed with the same data already. The node data returned is then that of the already existing node.

Example request

- **POST**
http://localhost:7474/db/data/index/node/index_1462496402508_1?uniqueness=get_or_create
- **Accept:** application/json; charset=UTF-8
- **Content-Type:** application/json

```

{
  "key" : "name",
  "value" : "Peter",
  "properties" : {
    "name" : "Peter",
    "sequence" : 2
  }
}

```

Example response

- **200:** OK
- **Content-Type:** application/json; charset=UTF-8
- **Location:** http://localhost:7474/db/data/index/node/index_1462496402508_1/name/Peter/15

```

{
  "extensions" : { },
  "metadata" : {
    "id" : 15,
    "labels" : [ ]
  },
  "paged_traverse" :
"http://localhost:7474/db/data/node/15/paged/traverse/{returnType}{?pageSize,leaseTime}",
  "outgoing_relationships" : "http://localhost:7474/db/data/node/15/relationships/out",
  "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/15/relationships/out/{-list|&|types}",
  "create_relationship" : "http://localhost:7474/db/data/node/15/relationships",
  "labels" : "http://localhost:7474/db/data/node/15/labels",
  "traverse" : "http://localhost:7474/db/data/node/15/traverse/{returnType}",
  "all_relationships" : "http://localhost:7474/db/data/node/15/relationships/all",
  "all_typed_relationships" : "http://localhost:7474/db/data/node/15/relationships/all/{-list|&|types}",
  "property" : "http://localhost:7474/db/data/node/15/properties/{key}",
  "self" : "http://localhost:7474/db/data/node/15",
  "incoming_relationships" : "http://localhost:7474/db/data/node/15/relationships/in",
  "properties" : "http://localhost:7474/db/data/node/15/properties",
  "incoming_typed_relationships" : "http://localhost:7474/db/data/node/15/relationships/in/{-list|&|types}",
  "data" : {
    "sequence" : 1,
    "name" : "Peter"
  },
  "indexed" : "http://localhost:7474/db/data/index/node/index_1462496402508_1/name/Peter/15"
}

```

Create a unique node or return fail (create)

Here, in case of an already existing node, an error should be returned. In this example, no existing indexed node is found and a new node is created.

Example request

- **POST**
http://localhost:7474/db/data/index/node/index_1462496403205_1?uniqueness=create_or_fail
- **Accept:** application/json; charset=UTF-8
- **Content-Type:** application/json

```

{
  "key" : "name",
  "value" : "Tobias",
  "properties" : {
    "name" : "Tobias",
    "sequence" : 1
  }
}

```

Example response

- **201:** Created
- **Content-Type:** application/json; charset=UTF-8
- **Location:** http://localhost:7474/db/data/index/node/index_1462496403205_1/name/Tobias/24

```

{
  "extensions" : { },
  "metadata" : {
    "id" : 24,
    "labels" : [ ]
  },
  "paged_traverse" :
"http://localhost:7474/db/data/node/24/paged/traverse/{returnType}{?pageSize,leaseTime}",
  "outgoing_relationships" : "http://localhost:7474/db/data/node/24/relationships/out",
  "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/24/relationships/out/{-list|&|types}",
  "create_relationship" : "http://localhost:7474/db/data/node/24/relationships",
  "labels" : "http://localhost:7474/db/data/node/24/labels",
  "traverse" : "http://localhost:7474/db/data/node/24/traverse/{returnType}",
  "all_relationships" : "http://localhost:7474/db/data/node/24/relationships/all",
  "all_typed_relationships" : "http://localhost:7474/db/data/node/24/relationships/all/{-list|&|types}",
  "property" : "http://localhost:7474/db/data/node/24/properties/{key}",
  "self" : "http://localhost:7474/db/data/node/24",
  "incoming_relationships" : "http://localhost:7474/db/data/node/24/relationships/in",
  "properties" : "http://localhost:7474/db/data/node/24/properties",
  "incoming_typed_relationships" : "http://localhost:7474/db/data/node/24/relationships/in/{-list|&|types}",
  "data" : {
    "sequence" : 1,
    "name" : "Tobias"
  },
  "indexed" : "http://localhost:7474/db/data/index/node/index_1462496403205_1/name/Tobias/24"
}

```

Create a unique node or return fail (fail)

Here, in case of an already existing node, an error should be returned. In this example, an existing node indexed with the same data is found and an error is returned.

Example request

- **POST**
http://localhost:7474/db/data/index/node/index_1462496402021_1?uniqueness=create_or_fail
- **Accept:** application/json; charset=UTF-8
- **Content-Type:** application/json

```

{
  "key" : "name",
  "value" : "Peter",
  "properties" : {
    "name" : "Peter",
    "sequence" : 2
  }
}

```

Example response

- **409:** Conflict
- **Content-Type:** application/json; charset=UTF-8

```

{
  "extensions" : { },
  "metadata" : {
    "id" : 9,
    "labels" : [ ]
  },
  "paged_traverse" :
"http://localhost:7474/db/data/node/9/paged/traverse/{returnType}{?pageSize,leaseTime}",
  "outgoing_relationships" : "http://localhost:7474/db/data/node/9/relationships/out",
  "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/9/relationships/out/{-list|&|types}",
  "create_relationship" : "http://localhost:7474/db/data/node/9/relationships",
  "labels" : "http://localhost:7474/db/data/node/9/labels",
  "traverse" : "http://localhost:7474/db/data/node/9/traverse/{returnType}",
  "all_relationships" : "http://localhost:7474/db/data/node/9/relationships/all",
  "all_typed_relationships" : "http://localhost:7474/db/data/node/9/relationships/all/{-list|&|types}",
  "property" : "http://localhost:7474/db/data/node/9/properties/{key}",
  "self" : "http://localhost:7474/db/data/node/9",
  "incoming_relationships" : "http://localhost:7474/db/data/node/9/relationships/in",
  "properties" : "http://localhost:7474/db/data/node/9/properties",
  "incoming_typed_relationships" : "http://localhost:7474/db/data/node/9/relationships/in/{-list|&|types}",
  "data" : {
    "sequence" : 1,
    "name" : "Peter"
  },
  "indexed" : "http://localhost:7474/db/data/index/node/index_1462496402021_1/name/Peter/9"
}

```

Add an existing node to unique index (not indexed)

Associates a node with the given key/value pair in the given unique index.

In this example, we are using `create_or_fail` uniqueness.

Example request

- **POST**
http://localhost:7474/db/data/index/node/index_1462496403028_1?uniqueness=create_or_fail
- **Accept:** application/json; charset=UTF-8
- **Content-Type:** application/json

```

{
  "value" : "some value",
  "uri" : "http://localhost:7474/db/data/node/20",
  "key" : "some-key"
}

```

Example response

- **201:** Created
- **Content-Type:** application/json; charset=UTF-8
- **Location:** http://localhost:7474/db/data/index/node/index_1462496403028_1/some-key/some%20value/20

```

{
  "extensions" : { },
  "metadata" : {
    "id" : 20,
    "labels" : [ ]
  },
  "paged_traverse" :
"http://localhost:7474/db/data/node/20/paged/traverse/{returnType}{?pageSize,leaseTime}",
  "outgoing_relationships" : "http://localhost:7474/db/data/node/20/relationships/out",
  "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/20/relationships/out/{-
list|&|types}",
  "create_relationship" : "http://localhost:7474/db/data/node/20/relationships",
  "labels" : "http://localhost:7474/db/data/node/20/labels",
  "traverse" : "http://localhost:7474/db/data/node/20/traverse/{returnType}",
  "all_relationships" : "http://localhost:7474/db/data/node/20/relationships/all",
  "all_typed_relationships" : "http://localhost:7474/db/data/node/20/relationships/all/{-list|&|types}",
  "property" : "http://localhost:7474/db/data/node/20/properties/{key}",
  "self" : "http://localhost:7474/db/data/node/20",
  "incoming_relationships" : "http://localhost:7474/db/data/node/20/relationships/in",
  "properties" : "http://localhost:7474/db/data/node/20/properties",
  "incoming_typed_relationships" : "http://localhost:7474/db/data/node/20/relationships/in/{-
list|&|types}",
  "data" : { },
  "indexed" : "http://localhost:7474/db/data/index/node/index_1462496403028_1/some-key/some%20value/20"
}

```

Add an existing node to unique index (already indexed)

In this case, the node already exists in the index, and thus we get a **HTTP 409** status response, as we have set the uniqueness to `create_or_fail`.

Example request

- **POST**
http://localhost:7474/db/data/index/node/index_1462496403142_1?uniqueness=create_or_fail
- **Accept:** application/json; charset=UTF-8
- **Content-Type:** application/json

```

{
  "value" : "some value",
  "uri" : "http://localhost:7474/db/data/node/23",
  "key" : "some-key"
}

```

Example response

- **409:** Conflict
- **Content-Type:** application/json; charset=UTF-8

```

{
  "extensions" : { },
  "metadata" : {
    "id" : 22,
    "labels" : [ ]
  },
  "paged_traverse" :
"http://localhost:7474/db/data/node/22/paged/traverse/{returnType}{?pageSize,leaseTime}",
  "outgoing_relationships" : "http://localhost:7474/db/data/node/22/relationships/out",
  "outgoing_typed_relationships" : "http://localhost:7474/db/data/node/22/relationships/out/{-list|&|types}",
  "create_relationship" : "http://localhost:7474/db/data/node/22/relationships",
  "labels" : "http://localhost:7474/db/data/node/22/labels",
  "traverse" : "http://localhost:7474/db/data/node/22/traverse/{returnType}",
  "all_relationships" : "http://localhost:7474/db/data/node/22/relationships/all",
  "all_typed_relationships" : "http://localhost:7474/db/data/node/22/relationships/all/{-list|&|types}",
  "property" : "http://localhost:7474/db/data/node/22/properties/{key}",
  "self" : "http://localhost:7474/db/data/node/22",
  "incoming_relationships" : "http://localhost:7474/db/data/node/22/relationships/in",
  "properties" : "http://localhost:7474/db/data/node/22/properties",
  "incoming_typed_relationships" : "http://localhost:7474/db/data/node/22/relationships/in/{-list|&|types}",
  "data" : {
    "some-key" : "some value"
  },
  "indexed" : "http://localhost:7474/db/data/index/node/index_1462496403142_1/some-key/some%20value/22"
}

```

Get or create unique relationship (create)

Create a unique relationship in an index. If a relationship matching the given key and value already exists in the index, it will be returned. If not, a new relationship will be created.



The type and direction of the relationship is not regarded when determining uniqueness.

Example request

- **POST**
http://localhost:7474/db/data/index/relationship/index_1462496393938_1?uniqueness=get_or_create
- **Accept:** application/json; charset=UTF-8
- **Content-Type:** application/json

```

{
  "key" : "name",
  "value" : "Tobias",
  "start" : "http://localhost:7474/db/data/node/134",
  "end" : "http://localhost:7474/db/data/node/135",
  "type" : "knowledge"
}

```

Example response

- **201:** Created
- **Content-Type:** application/json; charset=UTF-8
- **Location:**
http://localhost:7474/db/data/index/relationship/index_1462496393938_1/name/Tobias/89

```

{
  "extensions" : { },
  "metadata" : {
    "id" : 89,
    "type" : "knowledge"
  },
  "property" : "http://localhost:7474/db/data/relationship/89/properties/{key}",
  "start" : "http://localhost:7474/db/data/node/134",
  "self" : "http://localhost:7474/db/data/relationship/89",
  "end" : "http://localhost:7474/db/data/node/135",
  "type" : "knowledge",
  "properties" : "http://localhost:7474/db/data/relationship/89/properties",
  "data" : {
    "name" : "Tobias"
  },
  "indexed" : "http://localhost:7474/db/data/index/relationship/index_1462496393938_1/name/Tobias/89"
}

```

Get or create unique relationship (existing)

Here, in case of an already existing relationship, the sent data is ignored and the existing relationship returned.

Example request

- **POST**
http://localhost:7474/db/data/index/relationship/index_1462496394033_1?uniqueness=get_or_create
- **Accept:** application/json; charset=UTF-8
- **Content-Type:** application/json

```

{
  "key" : "name",
  "value" : "Peter",
  "start" : "http://localhost:7474/db/data/node/138",
  "end" : "http://localhost:7474/db/data/node/139",
  "type" : "KNOWS"
}

```

Example response

- **200:** OK
- **Content-Type:** application/json; charset=UTF-8

```

{
  "extensions" : { },
  "metadata" : {
    "id" : 90,
    "type" : "KNOWS"
  },
  "property" : "http://localhost:7474/db/data/relationship/90/properties/{key}",
  "start" : "http://localhost:7474/db/data/node/136",
  "self" : "http://localhost:7474/db/data/relationship/90",
  "end" : "http://localhost:7474/db/data/node/137",
  "type" : "KNOWS",
  "properties" : "http://localhost:7474/db/data/relationship/90/properties",
  "data" : { },
  "indexed" : "http://localhost:7474/db/data/index/relationship/index_1462496394033_1/name/Peter/90"
}

```


Create a unique relationship or return fail (create)

Here, in case of an already existing relationship, an error should be returned. In this example, no existing relationship is found and a new relationship is created.

Example request

- **POST**
`http://localhost:7474/db/data/index/relationship/index_1462496394229_1?uniqueness=create_or_fail`
- **Accept:** application/json; charset=UTF-8
- **Content-Type:** application/json

```
{
  "key" : "name",
  "value" : "Tobias",
  "start" : "http://localhost:7474/db/data/node/146",
  "end" : "http://localhost:7474/db/data/node/147",
  "type" : "KNOWS"
}
```

Example response

- **201:** Created
- **Content-Type:** application/json; charset=UTF-8
- **Location:**
`http://localhost:7474/db/data/index/relationship/index_1462496394229_1/name/Tobias/93`

```
{
  "extensions" : { },
  "metadata" : {
    "id" : 93,
    "type" : "KNOWS"
  },
  "property" : "http://localhost:7474/db/data/relationship/93/properties/{key}",
  "start" : "http://localhost:7474/db/data/node/146",
  "self" : "http://localhost:7474/db/data/relationship/93",
  "end" : "http://localhost:7474/db/data/node/147",
  "type" : "KNOWS",
  "properties" : "http://localhost:7474/db/data/relationship/93/properties",
  "data" : {
    "name" : "Tobias"
  },
  "indexed" : "http://localhost:7474/db/data/index/relationship/index_1462496394229_1/name/Tobias/93"
}
```

Create a unique relationship or return fail (fail)

Here, in case of an already existing relationship, an error should be returned. In this example, an existing relationship is found and an error is returned.

Example request

- **POST**
`http://localhost:7474/db/data/index/relationship/index_1462496393724_1?uniqueness=create_or_fail`
- **Accept:** application/json; charset=UTF-8
- **Content-Type:** application/json

```
{
  "key" : "name",
  "value" : "Peter",
  "start" : "http://localhost:7474/db/data/node/126",
  "end" : "http://localhost:7474/db/data/node/127",
  "type" : "KNOWS"
}
```

Example response

- **409:** Conflict
- **Content-Type:** application/json; charset=UTF-8

```
{
  "extensions" : { },
  "metadata" : {
    "id" : 85,
    "type" : "KNOWS"
  },
  "property" : "http://localhost:7474/db/data/relationship/85/properties/{key}",
  "start" : "http://localhost:7474/db/data/node/124",
  "self" : "http://localhost:7474/db/data/relationship/85",
  "end" : "http://localhost:7474/db/data/node/125",
  "type" : "KNOWS",
  "properties" : "http://localhost:7474/db/data/relationship/85/properties",
  "data" : { },
  "indexed" : "http://localhost:7474/db/data/index/relationship/index_1462496393724_1/name/Peter/85"
}
```

Add an existing relationship to a unique index (not indexed)

If a relationship matching the given key and value already exists in the index, it will be returned. If not, an **HTTP 409** (conflict) status will be returned in this case, as we are using `create_or_fail`.

It's possible to use `get_or_create` uniqueness as well.



The type and direction of the relationship is not regarded when determining uniqueness.

Example request

- **POST**
`http://localhost:7474/db/data/index/relationship/index_1462496393668_1?uniqueness=create_or_fail`
- **Accept:** application/json; charset=UTF-8
- **Content-Type:** application/json

```
{
  "key" : "name",
  "value" : "Peter",
  "uri" : "http://localhost:7474/db/data/relationship/84"
}
```

Example response

- **201:** Created
- **Content-Type:** application/json; charset=UTF-8
- **Location:**
`http://localhost:7474/db/data/index/relationship/index_1462496393668_1/name/Peter/84`

```

{
  "extensions" : { },
  "metadata" : {
    "id" : 84,
    "type" : "KNOWS"
  },
  "property" : "http://localhost:7474/db/data/relationship/84/properties/{key}",
  "start" : "http://localhost:7474/db/data/node/122",
  "self" : "http://localhost:7474/db/data/relationship/84",
  "end" : "http://localhost:7474/db/data/node/123",
  "type" : "KNOWS",
  "properties" : "http://localhost:7474/db/data/relationship/84/properties",
  "data" : { },
  "indexed" : "http://localhost:7474/db/data/index/relationship/index_1462496393668_1/name/Peter/84"
}

```

Add an existing relationship to a unique index (already indexed)

Example request

- **POST**
http://localhost:7474/db/data/index/relationship/index_1462496393779_1?uniqueness=create_or_fail
- **Accept:** application/json; charset=UTF-8
- **Content-Type:** application/json

```

{
  "key" : "name",
  "value" : "Peter",
  "uri" : "http://localhost:7474/db/data/relationship/87"
}

```

Example response

- **409: Conflict**
- **Content-Type:** application/json; charset=UTF-8

```

{
  "extensions" : { },
  "metadata" : {
    "id" : 86,
    "type" : "KNOWS"
  },
  "property" : "http://localhost:7474/db/data/relationship/86/properties/{key}",
  "start" : "http://localhost:7474/db/data/node/128",
  "self" : "http://localhost:7474/db/data/relationship/86",
  "end" : "http://localhost:7474/db/data/node/129",
  "type" : "KNOWS",
  "properties" : "http://localhost:7474/db/data/relationship/86/properties",
  "data" : { },
  "indexed" : "http://localhost:7474/db/data/index/relationship/index_1462496393779_1/name/Peter/86"
}

```

WADL Support

The Neo4j REST API is a truly RESTful interface relying on hypermedia controls (links) to advertise permissible actions to users. Hypermedia is a dynamic interface style where declarative constructs (semantic markup) are used to inform clients of their next legal choices just in time.



RESTful APIs cannot be modeled by static interface description languages like WSDL or WADL.

However for some use cases, developers may wish to expose WADL descriptions of the Neo4j REST API, particularly when using tooling that expects such.

In those cases WADL generation may be enabled by adding to *neo4j.conf*:

```
unsupported.dbms.wadl_generation_enabled=true
```



WADL is not an officially supported part of the Neo4j server API because WADL is insufficiently expressive to capture the set of potential interactions a client can drive with Neo4j server. Expect the WADL description to be incomplete, and in some cases contradictory to the real API. In any cases where the WADL description disagrees with the REST API, the REST API should be considered authoritative. WADL generation may be withdrawn at any point in the Neo4j release cycle.

Using the REST API from WebLogic

When deploying an application to WebLogic you may run into problems when Neo4j responds with an HTTP status of **204 No Content**. The response does not contain an entity body in such cases.

This can cause WebLogic to throw `java.net.SocketTimeoutException: Read timed out` for no obvious reason.

If you encounter this, please try setting `UseSunHttpHandler` to `true`. You can for example do this by adding the following to the WebLogic startup script:

```
-DUseSunHttpHandler=true
```

The WebLogic startup script is called `bin\startWebLogic.sh` (`bin/startWebLogic.cmd` on Windows).

License

Creative Commons 3.0

You are free to

Share

copy and redistribute the material in any medium or format

Adapt

remix, transform, and build upon the material

for any purpose, even commercially.

The licensor cannot revoke these freedoms as long as you follow the license terms.

Under the following terms

Attribution

You must give appropriate credit, provide a link to the license, and indicate if changes were made. You may do so in any reasonable manner, but not in any way that suggests the licensor endorses you or your use.

ShareAlike

If you remix, transform, or build upon the material, you must distribute your contributions under the same license as the original.

No additional restrictions

You may not apply legal terms or technological measures that legally restrict others from doing anything the license permits.

Notices

You do not have to comply with the license for elements of the material in the public domain or where your use is permitted by an applicable exception or limitation.

No warranties are given. The license may not give you all of the permissions necessary for your intended use. For example, other rights such as publicity, privacy, or moral rights may limit how you use the material.

See <http://creativecommons.org/licenses/by-sa/3.0/> for further details. The full license text is available

at <http://creativecommons.org/licenses/by-sa/3.0/legalcode>.